



Stepping System Cables

SureStep® Cables

SureStep Series – Stepping System Cables							
Cable	Price	Purpose	Length	Use With	Cable End Connectors	Drawing	
STP-EXT-006	\$13.00	motor to drive extension	6 ft	STP-MTR-xxxxx(x)	pigtail / Molex 43020-0401 connector	PDF	
STP-EXT-010	\$14.50		10 ft			PDF	
STP-EXT-020	\$18.50		20 ft			PDF	
STP-EXTH-006	\$26.50		6 ft	STP-MTRH-xxxxx(x)	pigtail / Molex 39-01-2041 connector	PDF	
STP-EXTH-010	\$31.50		10 ft			PDF	
STP-EXTH-020	\$38.00		20 ft			PDF	
STP-EXTHW-006	\$57.00		6 ft	STP-MTRHW-xxxxx(x)	Bulgin # PXP4011/06P/6065	PDF	
STP-EXTHW-010	\$69.00		10 ft			PDF	
STP-EXTHW-020	\$105.00		20 ft			PDF	
STP-EXTL-006	\$11.50		6 ft	STP-MTRL-xxxxx(x)	pigtail / Molex 105308-22004 connector	PDF	
STP-EXTL-010	\$14.50		10 ft			PDF	
STP-EXTL-020	\$18.00		20 ft			PDF	
STP-EXTW-006	\$56.00		6 ft	STP-MTRW-xxxxx(x)	Bulgin # PXP4011/06P/6065	PDF	
STP-EXTW-010	\$68.00		10 ft			PDF	
STP-EXTW-020	\$99.00		20 ft			PDF	
STP-EXT42-006	\$29.00		motor to drive extension	6 ft	STP-MTRAC-42xxxx	10-pin / pigtail	PDF
STP-EXT42-010	\$34.00			10 ft			PDF
STP-EXT42-020	\$49.00			20 ft			PDF
STP-EXT42H-006	\$29.00	6 ft		STP-MTRACH-42xxxxx	PDF		
STP-EXT42H-010	\$34.00	10 ft			PDF		
STP-EXT42H-020	\$49.00	20 ft			PDF		
STP-232RJ11-CBL*	\$15.00	programming/ communication	10 ft	STP-DRV-4850, STP-DRV-80100	DB9 female / RJ11(6P4C)	PDF	
STP-232HD15-CBL-2**	\$19.00	communication	6.6 ft	STP-DRV-4850, STP-DRV-80100 DL06, D2-250-1, D2-260	HD 15-pin male / RJ12 6-pin plug	n/a	
STP-232RJ12-CBL-2**	\$12.00	communication	6.6 ft	STP-DRV-4850, STP-DRV-80100 DL05, CLICK	RJ11 (6P4C) plug / RJ12 6-pin plug	n/a	
STP-CBL-CA6	\$32.00	control cable	6 ft	STP-MTRD-17038 STP-MTRD-17038E	11-pin / pigtail	PDF	
STP-CBL-CA10	\$47.00	control cable	10 ft		11-pin / pigtail	PDF	
STP-CBL-CA20	\$85.00	control cable	20 ft		11-pin / pigtail	PDF	
STP-CBL-EA6	\$31.00	encoder cable	6 ft	STP-MTRD-xxxxxE STP-MTRA-ENC1, STP-MTRA-ENC3 STP-MTRA-ENC5, STP-MTRA-ENC7 STP-MTRA-ENC11, STP-MTRA-ENC13 (for line driver encoders)	10-pin / pigtail	PDF	
STP-CBL-EA10	\$37.00	encoder cable	10 ft		10-pin / pigtail	PDF	
STP-CBL-EA20	\$52.00	encoder cable	20 ft		10-pin / pigtail	PDF	
STP-CBL-EB3	\$60.00	encoder cable	3 ft	AMT112Q-V AMT112S-V (for both line driver and push-pull (totem) encoders)	17-pin / pigtail	PDF	
STP-CBL-EB6	\$83.00	encoder cable	6 ft		17-pin / pigtail	PDF	
STP-CBL-EB10	\$113.00	encoder cable	10 ft		17-pin / pigtail	PDF	
STP-CBL-EB20	\$187.00	encoder cable	20 ft		17-pin / pigtail	PDF	
STP-CBL-ED6	\$34.00	encoder cable	6 ft	STP-MTRA-ENC2, STP-MTRA-ENC4 STP-MTRA-ENC6, STP-MTRA-ENC8 STP-MTRA-ENC12, STP-MTRA-ENC14 (for push-pull (totem) encoders)	5-pin / pigtail	PDF	
STP-CBL-ED10	\$46.00	encoder cable	10 ft		5-pin / pigtail	PDF	
STP-CBL-ED20	\$55.00	encoder cable	20 ft		5-pin / pigtail	PDF	
STP-CON-1	\$31.00	replacement connector kit	n/a	STP-DRV-4845 & -6575	-	n/a	
STP-CON-2	\$31.00	replacement connector kit	n/a	STP-DRV-4850 & 80100	-	n/a	

* Programming/communication cable STP-232RJ11-CBL is available for spare or replacement purposes.
(One cable is included with each software programmable drive.)

** Refer to the ZIPLinks Wiring Solutions section for complete information regarding cables STP-232HD15-CBL-2 and STP-232RJ12-CBL-2.

SureStep® Cables, *continued*

SureStep Series – Stepping System Cables						
Cable	Price	Purpose	Length	Use With	Cable End Connectors	Drawing
<u>STP-CON-3</u>	\$62.00	replacement connector kit	n/a	STP-MTRD-xxxxR	-	n/a
<u>STP-CON-4</u>	\$28.50	replacement connector kit	n/a	STP-DRVA-RC-050A	-	n/a
<u>STP-CON-5</u>	\$28.50	replacement connector kit	n/a	STP-DRV-4830	-	PDF
<u>STP-CON-6</u>	\$34.00	replacement connector kit	n/a	STP-DRVAC-24025	-	n/a
<u>STP-485DB9-CBL-2</u>	\$52.00	4-wire programming cable	6.5 ft	STP-MTRD-xxxxR	DB9 / Phoenix 5-conductor plug	PDF


STP-EXT(x)-0xx Extension Cable Wiring Diagram

EXT & EXTH CABLES


PIN#	COLOR
1	RED
2	WHITE
3	GREEN
4	BLACK

EXTL CABLES

PIN#	COLOR
1	RED
2	WHITE
3	GREEN
4	BLACK

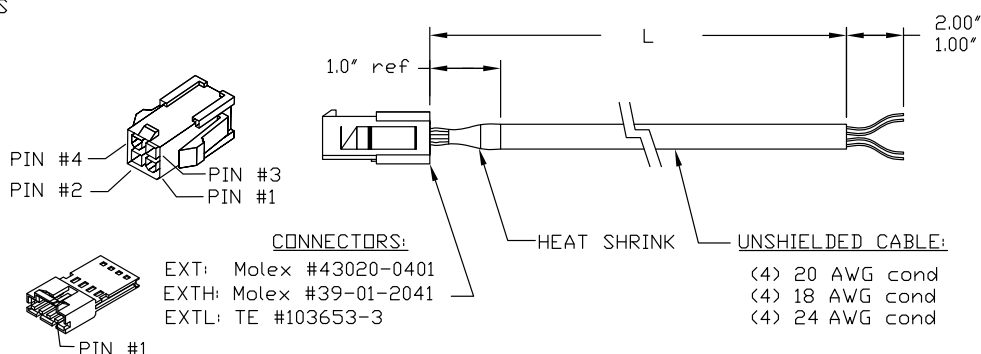


STP-EXTW-0xx and STP-EXTHW-0xx Extension Cable Wiring Diagram

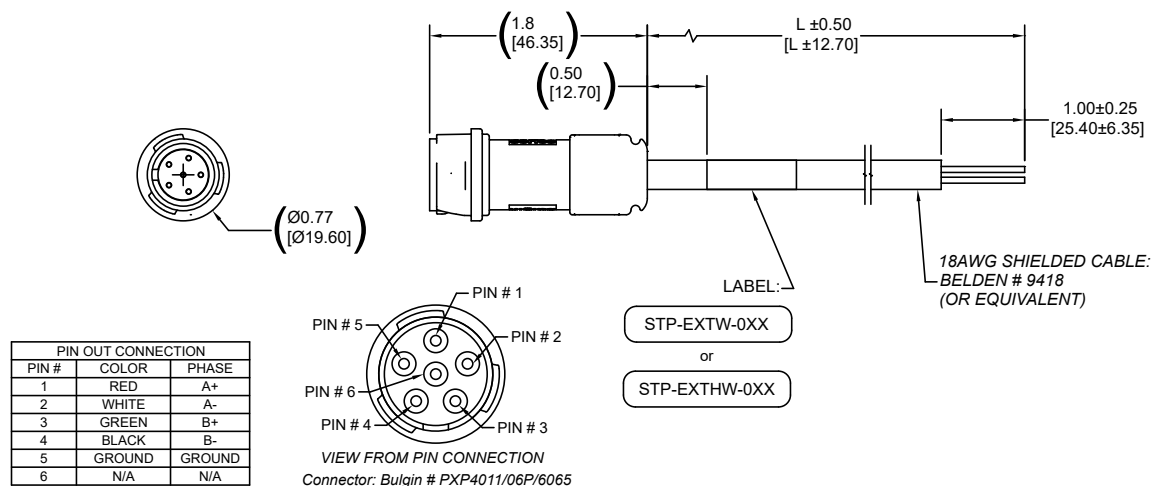

Stepping System Cables

SureStep® Cables, continued

STP-232RJ11-CBL Programming Cable Wiring Diagram

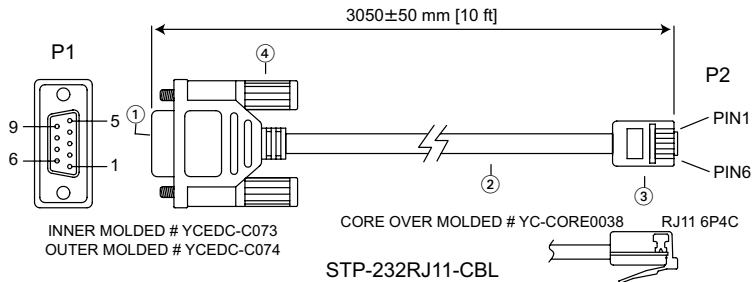


WIRE CONNECTION

(DB9) P1		P2 (RJ11 6P4C)
2	RX	TX
3	TX	RX
4	nc	nc
5	GND	GND

①	DB 9P FEMALE CONNECTOR SHELL: FRONT NICKEL BACK TIN INSULATOR COLOR: BLACK
②	CABLE: CAT-5 UTP 24AWG (7/0.203BA*2PR) 100MHz COLOR: BLACK OD: 4.5mm
③	RJ11 6P4C PLATED GOLD 3U"
④	SCREW: #4-40UNC PD40*175TNP COLOR: BLACK


STP-485DB9-CBL-2 4-wire Programming Cable Wiring Diagram

CONNECTION CHART				
DB-9 CONN PIN	DB9 SIGNAL	WIRE COLOR	PHOENIX PIN	PHOENIX SIGNAL
2	TX+	RED	5	RX+
1	TX-	ORANGE	4	RX-
3	RX+	BLACK	3	TX+
4	RX-	BROWN	2	TX-
5	GND	YELLOW	1	GND
METAL HOUSING	SHIELD	SHIELD	N/C	N/C

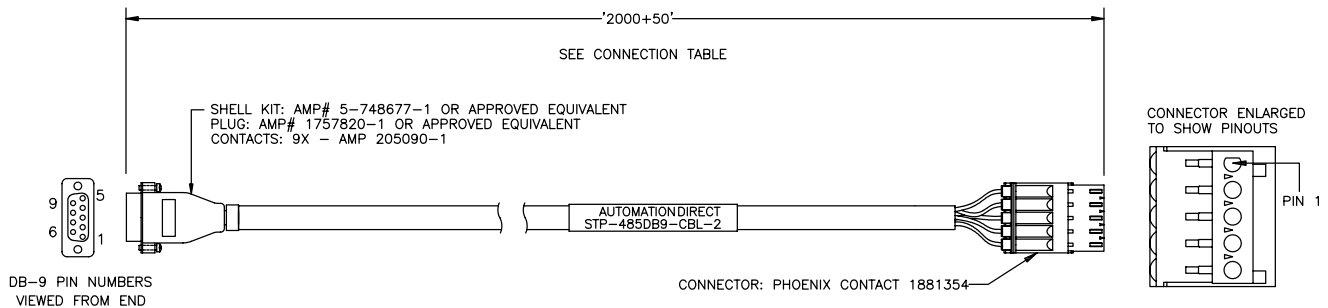


SureStep® Cables, continued


STP-CBL-CAxx Control Cable Wiring Diagram

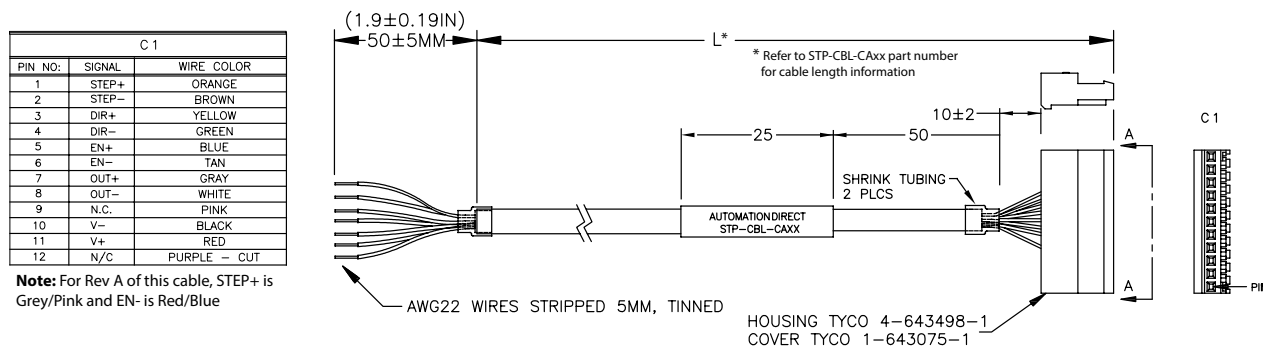

STP-CBL-EAxx Encoder Cable Wiring Diagram

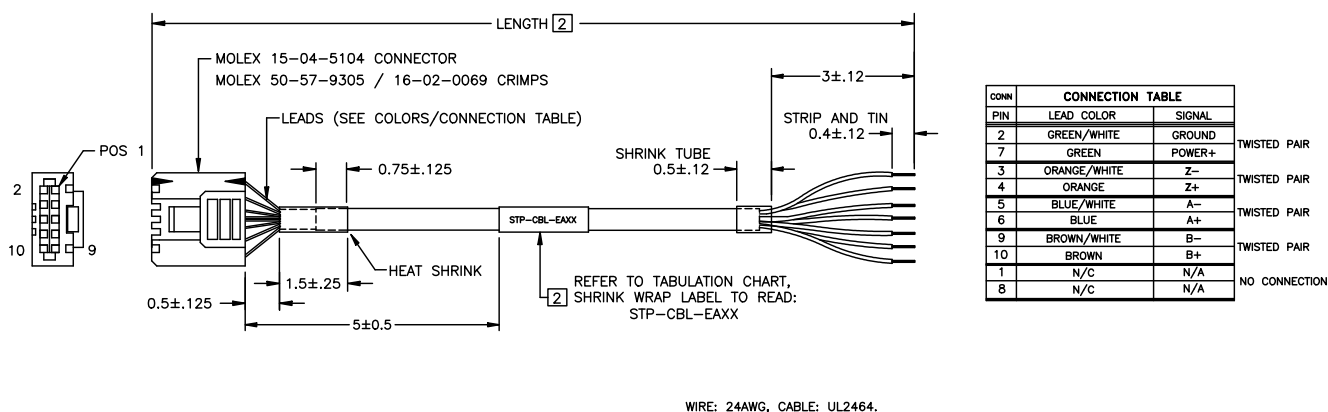

STP-CBL-EBxx Encoder Cable Wiring Diagram

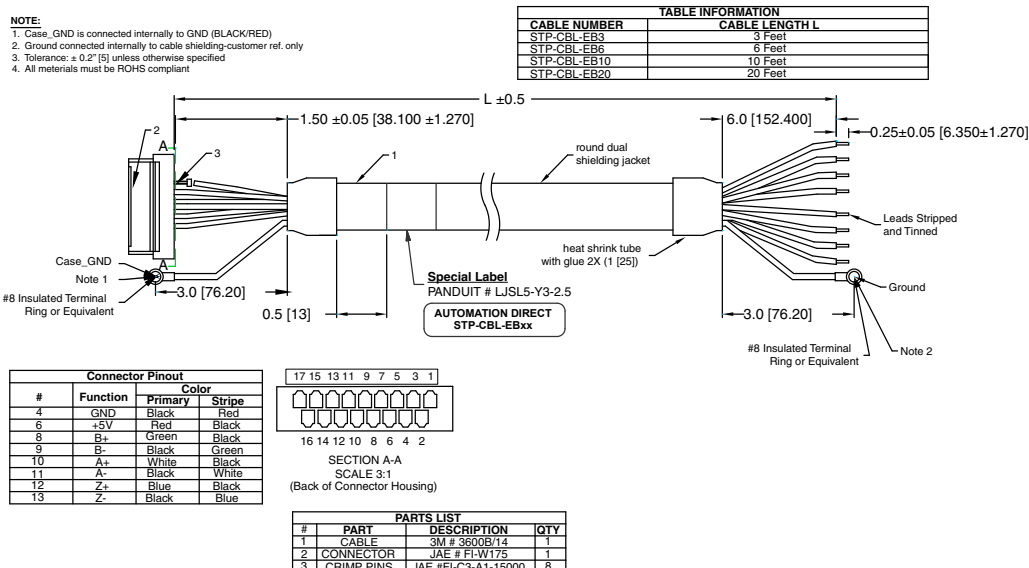



Stepping System Cables


SureStep® Cables, continued

STP-CBL-EDxx Encoder Cable Wiring Diagram


STP-EDxx CABLES

PIN#	Function	Color
1	Ground	Black
2	Index	Green
3	A Channel	White
4	+5VDC Power	Red
5	B Channel	Brown


TABLE INFORMATION	
CABLE NUMBER	CABLE LENGTH L
STP-CBL-ED6	6 Feet
STP-CBL-ED10	10 Feet
STP-CBL-ED20	20 Feet

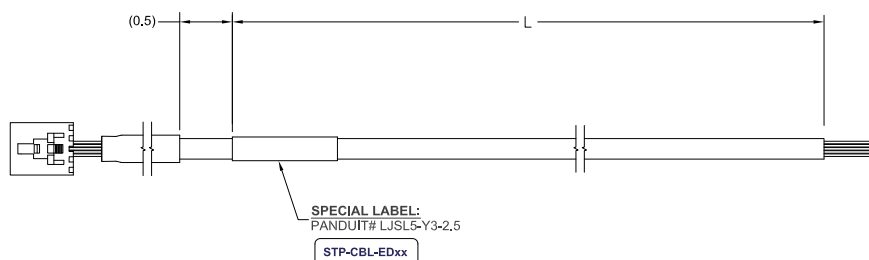


STP-EXT42(H)-xxx Cable Wiring Diagram

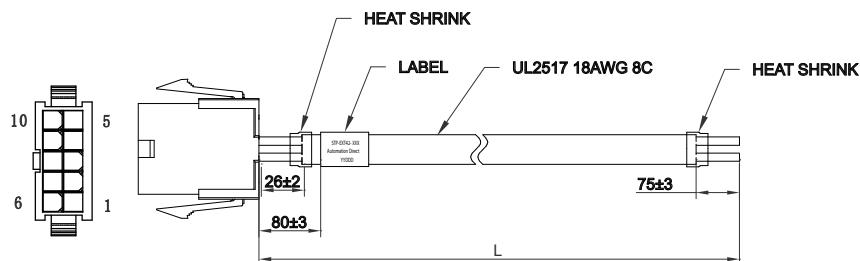

Pin	Wire Description
1	A - White
2	$\bar{A}$ - Orange
3	C - Green
4	$\bar{C}$ - Brown
5	B - Red
6	$\bar{B}$ - Yellow
7	D - Black
8	$\bar{D}$ - Blue
9	GND - Drain wire



Bi-polar series



Bi-polar parallel

