

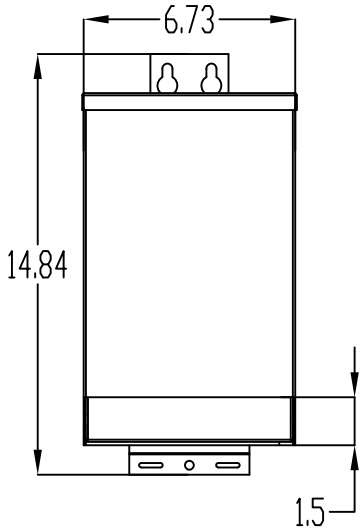



FRONT

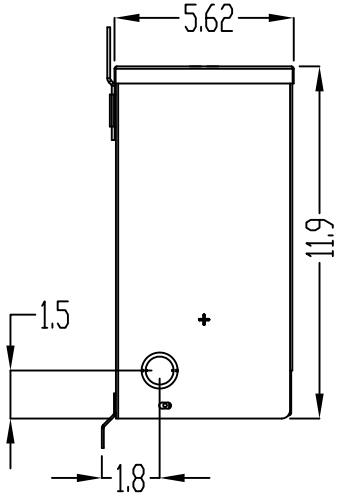


SIDE

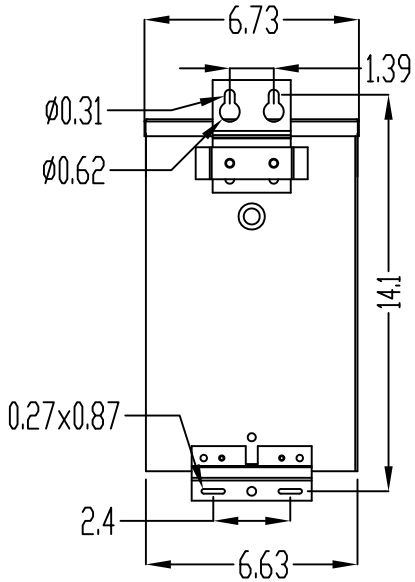


BACK 1

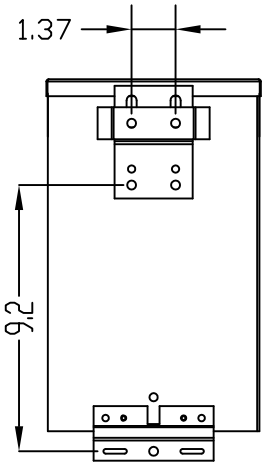

BACK 2




TOP

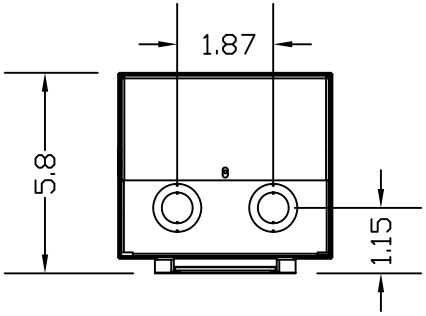

BOTTOM

For field connections, use wires insulated for a minimum of 75°C

CONNECTION DIAGRAM

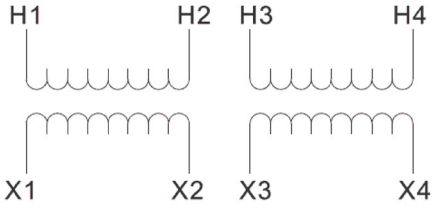

Windings X and H must be connected in either a parallel or series configuration

HIGH VOLTS	INTERCONNECT	CONNECT HIGH LINES TO
480	H2 to H3	H1 - H4
240	H1 to H3 H2 to H4	H1 - H4

LOW VOLTS	INTERCONNECT	CONNECT LOW LINES TO
240	X2 to X3	X1 - X4
120/240	X2 to X3	X1 - X2 - X4
120	X1 to X3 X2 to X4	X1 - X4

0190 SR

KVA	CATALOG NO.	HV	LV	ENCLOSURE	SOUND LEVEL	NO LOAD LOSSES
2.0	T1002K0190C	240X480	120/240	NEMA 3R	40 db	47.6 W

PHASE	FREQ.	IMPEDANCE	TEMP RISE	TYP. EFFIC.	INS. SYS(c)	TOTAL LOSSES @ OPERATING TEMP	WDG. MATL.	WEIGHT
1	60Hz	9.6%	135°C		200	140 W		48 lbs

REV	ECO	DESCRIPTION	BY	ENG	DATE
A	N/A	RELEASED	AJP		

BRAND

CONFIDENTIAL AND PROPRIETARY

THE INFORMATION IN THIS DRAWING IS THE SOLE PROPERTY OF ACME ELECTRIC

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ACME ELECTRIC IS PROHIBITED

	NAME	DATE
DRAWN	F.D.	2/14/25
CHECKED		
ENG APPR.		

DIMENSIONS IN INCHES

SCALE: 1:

SHEET 1 OF 1

Acme Electric®
MENOMONEE FALLS, WI 53051 USA

TITLE: T1002K0190C

SIZE B | DWG NO: | REV A