




FRONT



SIDE

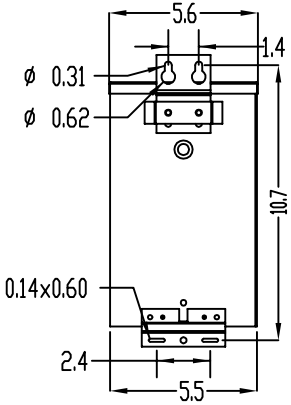


BACK 1




BACK 2

BOTTOM



For field connections, use wires insulated for a minimum of 75˚C

CONNECTION DIAGRAM



Windings X and H must be connected in either a parallel or series configuration

HIGH VOLTS	INTERCONNECT	CONNECT HIGH LINES TO
480	H2 to H3	H1 - H4
240	H1 to H3 H2 to H4	H1 - H4

LOW VOLTS	INTERCONNECT	CONNECT LOW LINES TO
240	X2 to X3	X1 - X4
120/240	X2 to X3	X1 - X2 - X4
120	X1 to X3 X2 to X4	X1 - X4

0190 SR

KVA	CATALOG NO.	HV	LV	ENCLOSURE	SOUND LEVEL	NO LOAD LOSSES
0.75	T1750V0190C	240X480	120/240	NEMA 3R	40 db	18 W

PHASE	FREQ.	IMPEDANCE	TEMP RISE	TYP. EFFIC.	INS. SYS(c)	TOTAL LOSSES @ OPERATING TEMP	WDG. MATL.	WEIGHT
1	60Hz	12.8%	135°C		200	74 W		19 lbs

REV	ECO	DESCRIPTION	BY	ENG	DATE
A	N/A	RELEASED	AJP		
BRAND					

CONFIDENTIAL AND PROPRIETARY

THE INFORMATION IN THIS DRAWING IS THE SOLE PROPERTY OF ACME ELECTRIC

ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ACME ELECTRIC IS PROHIBITED

	NAME	DATE
DRAWN	F.D.	2/14/25
CHECKED		
ENG APPR.		

DIMENSIONS IN INCHES

SCALE: 1:

SHEET 1 OF 1

Acme Electric®
MENOMONEE FALLS, WI 53051 USA

TITLE: T1750V0190C

SIZE B | DWG NO | REV A