




Caution


Do not use media, voltage or pressures other than that recommended by Spartan Scientific Inc. as valve malfunction could result. Misuse or misapplication of Spartan sciencid valves could cause serious bodily injury or property damage.

Warranty Information


Solenoid valves and all other products manufactured by Spartan are warranted by Spartan to be free from defects in material and work-manship for a period of 1 year from the date of purchase. Spartan's obligation under this warranty is limited to repair or replacement of the defective product or refund of the purchase price paid solely at the discretion of Spartan and provided such defective product is returned to Spartan freight prepaid and upon examination by Spartan such product is found defective. This warranty shall be void in the event that the product has been subject to misuse, misapplication, improper maintenance, modification or tampering. This warranty is expressed in lieu of all other warranties, expressed or implied from Spartan Scientific, Inc., representatives or employees.



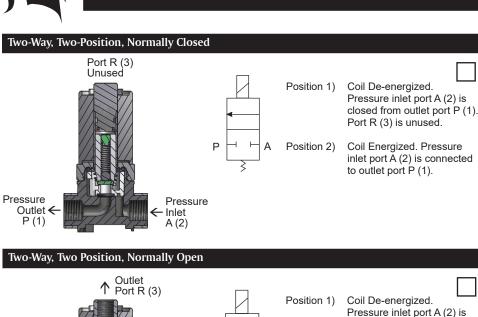

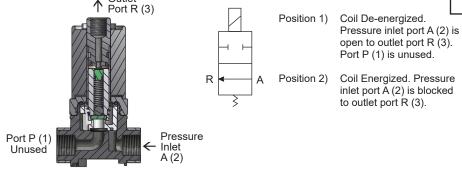

Three-Way, Two Position, Normally Closed

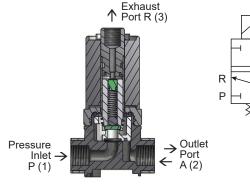



Position 1) Coil De-energized.
Pressure inlet port

Pressure inlet port P (1) is blocked and outlet port A (2) is open to exhaust port R (3)

R (3).


Position 2) Coil Energized. Pressure inlet port P (1) is open to outlet port A (2). Exhaust

port R (3) is blocked.







Three-Way, Two Position, Normally Open

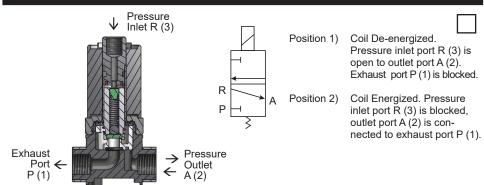

Three-Way, Two Position, Mixing Function

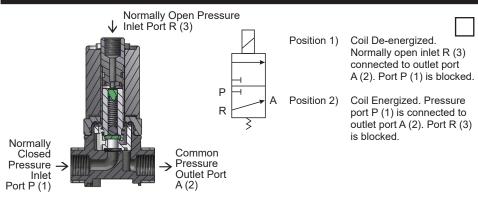

Three-Way, Two Position, Diverter Function

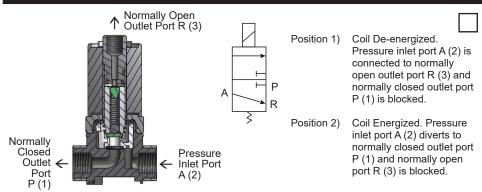


SPARTAN

8510 Foxwood Ct. • Youngstown, Ohio 44514 PH: (855)629-4648 • Fax: (330)758-3314 www.spartanscientific.com




Electrical Hook-Up

Spade Style Coil



Flying Lead Style Coil



Warning! Plastic pipe threads.

Overtightening of fittings may result in premature part failure.

Spartan Scientific requests the use of plastic molded pipe fittings whenever possible. If metal fittings are used do not exceed a maximum of 70 in. lbs. of applied torque or finger tighten and 2 1/2 turns with a conventional box end wrench.

Mounting Hole / Passage Pattern

