



**Diffuse sensor - PNP**  
**LTR-M18MA-PMS-603**




For use in NFPA 79 Applications only

Sensing range  
typ. max. **3...1200 mm**

Housing **M18**

Operation range **5...1000 mm**

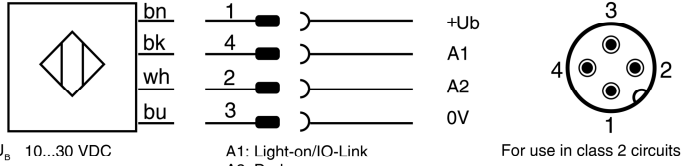

$U_b$  10...30 VDC  
 $I_A \leq 200$  mA

A1: Light-on/IO-Link  
 A2: Dark-on

For use in class 2 circuits

Adapters providing field wiring means are available from the manufacturer.  
 Refer to manufacturers information.

WARNING - HOT SURFACE - RISK OF BURN - AVERTISSEMENT - SURFACE CHAUDE - RISQUE DE BRÙLURE



**CONTRINEX USA**  
 480 Wrangler Dr 100, Coppel TX 75019 US  
 Internet: [www.contrinex.com](http://www.contrinex.com)



620-400-270

Made by Contrinex USA

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.