

NOTES:

- 1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
- 2. STANDARD PRODUCT USES BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.
- 3. KEY DIMENSIONS EQUAL

0.250"x 0.250"x 1.75"

(MOTOR SUPPLIED WITH KEY)

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT AND THE DATA MAY CHANGE WITHOUT NOTICE

PRELIMINARY

DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS MARKED AS CERTIFIED

X CERTIFIED

TOSHIBA www.toshiba.com/tic



TOTALLY ENCLOSED FAN COOLED
FOOTED C-FACED
3 PHASE INDUCTION MOTOR
182TC-184TC F1 ASSEMBLY

DRAWING #: MDSLV003-02

REV. DATE: 06/21/18 REV. #: 4 PER.: M. O'DOWD

REV. DESCRIP.:

TOSHIBA INTERNATIONAL CORPORATION



Issued Date	12/18/2019	Transmit #	
Issued By	dschoeck	Issued Rev	

TYPICAL MOTOR PERFORMANCE DATA

Model: Y156SDSR42A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
1.50	1.1	6	1170	182TC	230/460	60	3	5.0/2.5
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	87.5	В	М	40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
ull Load	1.50	1.1	2.5	87.7	65.4
¼ Load	1.13	0.8	2.1	86.0	55.7
∕₂ Load	0.75	0.6	1.9	81.8	44.1
∕₄ Load	0.38	0.3	1.8	69.6	28.1
No Load			1.5		7.1
Locked Rotor	1		20		45.5

	Torque							
Full Load	Locked Rotor	Pull Up	Break Down	Inertia				
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)				
6.73	245	185	420	0.43				

Safe Stall	Time(s)	Sound Bearings*		Approx. Motor Weight		
Cold	Hot	Pressure dB(A) @ 1M	DE NDE		(lbs)	
35	15	-	6306ZZC3	6306ZZC3	106	

*Bearings are the only recommended spare part(s).

Motor Options:
Product Family:EQP Global SD CFace Footed
Mounting:C-Face Footed,Shaft:T Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

, iii shaadanada aha aha aha aha aha aha aha aha aha						
	TOSHIBA INTE	RNATIONAL CORPORATION ·	HOUSTON, TEXAS U.S.A.			
Engineering	aacosta	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 1	
Engr. Date	4/19/2012	Doc. Approved By	M. Campbell	Doc. Issued	9/20/2019	



Issued Date	12/18/2019	Transmit #	
Issued By	dschoeck	Issued Rev	

TYPICAL MOTOR PERFORMANCE DATA

Model: Y156SDSR42A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
1.50	1.1	6	960	182TC	190/380	50	3	5.8/2.9
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.0	CONT	82.5	В	M	40 C

Load	HP	kW	Amperes	Efficiency (%)	Power Factor (%)
Full Load	1.50	1.1	2.9	84.9	61.5
¾ Load	1.13	0.8	2.3	84.4	54.2
√₂ Load	0.75	0.6	2.0	81.8	42.9
∕₄ Load	0.38	0.3	1.8	71.0	32.1
No Load			1.6		6.9
Locked Rotor			25		59.9

Torque							
Full Load	Locked Rotor	Pull Up	Break Down	Inertia			
(lb-ft)	(% FLT)	(% FLT)	(% FLT)	(lb-ft²)			
8.21	255	210	315	0.43			

Safe Stall	Time(s)	Sound Bearings*		Approx. Motor Weight		
Cold	Hot	Pressure dB(A) @ 1M	DE NDE		(lbs)	
35	29	-	6306ZZC3	6306ZZC3	106	

*Bearings are the only recommended spare part(s).

Motor Options:
Product Family:EQP Global SD CFace Footed
Mounting:C-Face Footed,Shaft:T Shaft

Customer	
Customer PO	
Sales Order	
Project #	

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	jhock	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1119 / 1			
Engr. Date	4/3/2014	Doc. Approved By	M. Campbell	Doc. Issued	9/20/2019			




Issued Date	12/18/2019	Transmit #	
Issued By	dschoeck	Issued Rev	

SPEED TORQUE/CURRENT CURVE

Model: Y156SDSR42A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
1.50	1.1	6	1170	182TC	230/460	60	3	5.0/2.5
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.15	CONT	87.5	В	М	40 C
Laskad Datas	Rotor wk ²				Torque			
Locked Rotor Amps	Inertia	Full Load	Locked	Rotor	Pull Up)	Break	Down
Amps	(lb-ft²)	(lb-ft)	(%	6)	(%)		(%	%)
20	0.43	6.73	245		185	_	42	20

Design Values

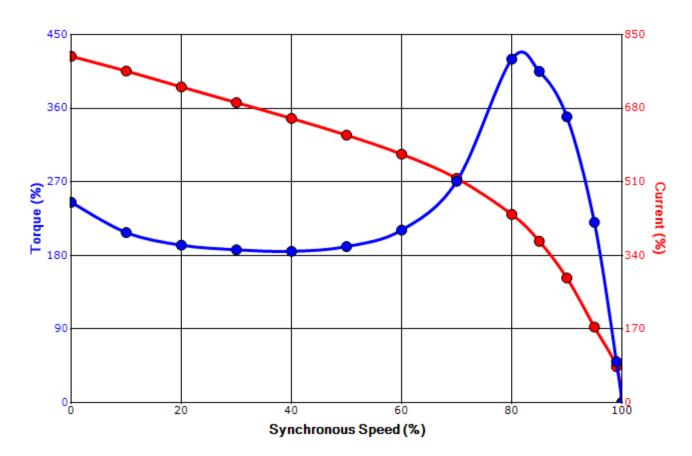



Customer	wk² Load Inertia (lb-	
Customer PO	Load Ty	oe -
Sales Order	Voltage (/6) 100
Project #	Accel. Tir	re -

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	aacosta	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121/1			
Engr. Date	4/19/2012	Doc. Approved By	M. Campbell	Doc. Issued	9/20/2019			




Issued Date	12/18/2019	Transmit #	
Issued By	dschoeck	Issued Rev	

SPEED TORQUE/CURRENT CURVE

Model: Y156SDSR42A-P

HP	kW	Pole	FL RPM	Frame	Voltage	Hz	Phase	FL Amps
1.50	1.1	6	960	182TC	190/380	50	3	5.8/2.9
Enclosure	IP	Ins. Class	S.F.	Duty	NEMA Nom. Eff.	NEMA Design	kVA Code	Ambient (°C)
TEFC	55	F	1.0	CONT	82.5	В	М	40 C
Looked Dates	Rotor wk²	_			Torque			
Locked Rotor Amps	Inertia	Full Load	Locked	l Rotor	Pull U	р	Break	Down
Allips	(lb-ft²)	(lb-ft)	(%)		(%)		(%	6)
25	0.43	8.21	255		210		3.	15

Design Values

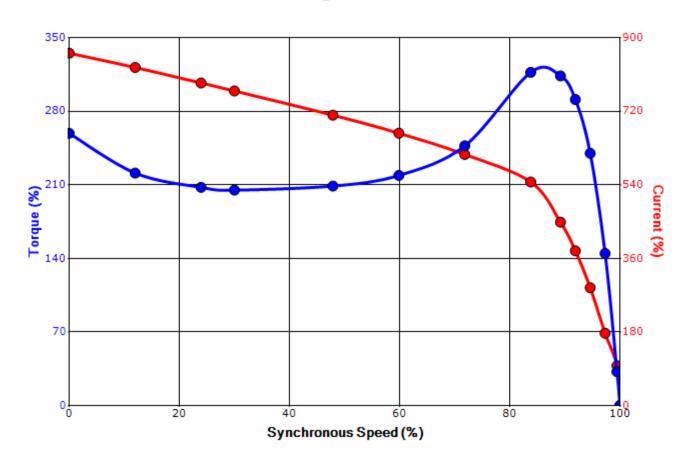




Customer	wk² Load Inertia (lb-	
Customer PO	Load Ty	oe -
Sales Order	Voltage (/6) 100
Project #	Accel. Tir	re -

Tag:

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.								
Engineering	jhock	Doc. Written By	D. Suarez	Doc.# / Rev	MPCF-1121/1			
Engr. Date	4/3/2014	Doc. Approved By	M. Campbell	Doc. Issued	9/20/2019			

Motor Connection Diagrams 9 Leads

Across-the-Line Starting / Running Connections

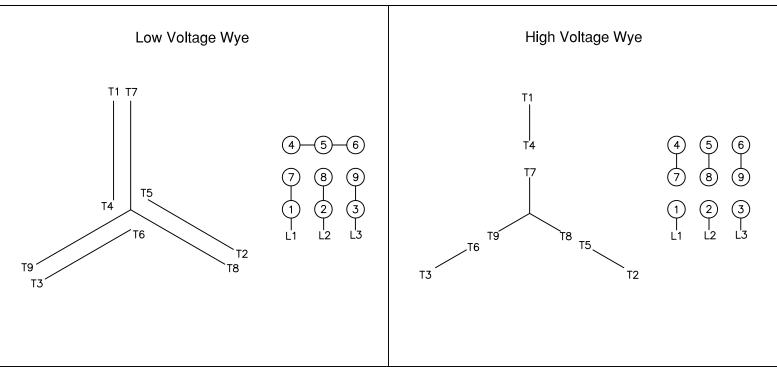

Switch L1 and L2 to reverse rotation

By: R. Murillo Date: 4/9/08 Checked: MDC Date: 5/17/11 Revision 0