

# PMW Series Inductive Proximity Sensors



## M12 (12mm) Stainless Steel – DC

- Low cost/high performance
- LED status indicators are visible at a wide angle.
- Axial cable or M12 quick-disconnect models
- Purchase cable separately (for quick-disconnect models).
- Lifetime warranty




### PMW Series M12 DC Inductive Proximity Selection Chart


Part Number	Price	Sensing Range	Mounting	Output State	Logic	Connection	Wiring	Dimensions
Standard Distance								
PMW-0N-1H	\$;09dt:	2mm [0.08 in]	Flush	N.O./N.C.	NPN	M12 [12mm] connector	Diagram 3	Figure 1
PMW-0P-1H	\$09dv:				PNP	M12 [12mm] connector	Diagram 4	Figure 1
PMW-0N-2H	\$09du:	4mm [0.157 in]	Non-flush	N.O./N.C.	NPN	M12 [12mm] connector	Diagram 3	Figure 1
PMW-0P-2H	\$09dx:				PNP	M12 [12mm] connector	Diagram 4	Figure 1
Triple Distance								
PMW-AN-5A	\$009ed:	6mm [0.236 in]	Flush	N.O.	NPN	2m [6.5 ft] axial cable	Diagram 1	Figure 2
PMW-AP-5A	\$;009ef:				PNP	2m [6.5 ft] axial cable	Diagram 2	Figure 2
PMW-AN-5H	\$009ee:				NPN	M12 [12mm] connector	Diagram 1	Figure 3
PMW-AP-5H	\$009eg:				PNP	M12 [12mm] connector	Diagram 2	Figure 3

## Wiring Diagrams


**Diagram 1**  
NPN Output



**Diagram 2**  
PNP Output




**Connector**  
M12 connector




Note: Pin 2 is not present on some models.

**Diagram 3**  
NPN Output



**Diagram 4**  
PNP Output



# PMW Series Inductive Proximity Sensors

## PMW Series M12 DC Inductive Proximity Specifications

Models	Standard Distance	Triple Distance
Mounting Type	Flush	Flush
Nominal Sensing Distance	2mm [0.08 in] <sup>1</sup>	6mm [0.236 in]
Operating Distance	NA	
Material Correction Factors	See the <a href="#">Material influence table</a>	
Output Type	NPN or PNP and N.O./N.C. complementary	NPN or PNP, N.O. only
Operating Voltage	10 to 30 VDC	
No-load Supply Current	≤15 mA	≤10 mA
Operating (Load) Current	≤100 mA	≤100 mA
Off-state (Leakage) Current	≤1 0μA	≤100μA
Voltage Drop	≤1.2 V	≤2.0 V
Switching Frequency	2kHz	400Hz
Differential Travel (% of Nominal Distance)	2 to 10%	≤ 15%
Repeat Accuracy	≤5%	
Ripple	≤10%	≤ 20%
Time Delay Before Availability (tv)	100ms	≤10 ms
Reverse Polarity Protection	Yes	
Short-circuit Protection	Yes	
Operating Temperature / Temperature Drift	-25 to 70°C [-13 to 158°F] / 10%/Sr	
Protection Degree (DIN 40050)	IEC IP67/68	IEC IP67 <sup>2</sup> (connector/IP68 <sup>2</sup> cable)
Indication/Switch Status	Yellow (N.O. output energized)	
Housing Material	Stainless steel	Stainless steel
Sensing Face Material	PPS	Stainless steel
Shock/Vibration	See <a href="#">Proximity Sensor Terminology</a>	
Tightening Torque	10Nm [7.25 lb-in]	
Weight	35g [1.23 oz]	89g [3.14 oz]
Connections	M12 connector with gold-plated contacts	
Agency Approvals	NA	UL file E328811, RoHS

Notes: <sup>1</sup>With 12 x 12mm FE360 target

<sup>2</sup>Fully submersible to 290 psi.

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

## Dimensions

mm[inches]

Figure 1

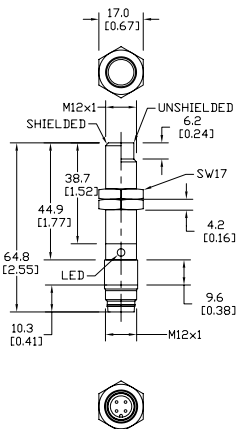


Figure 2

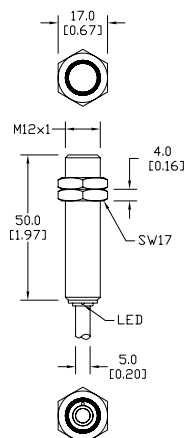


Figure 3


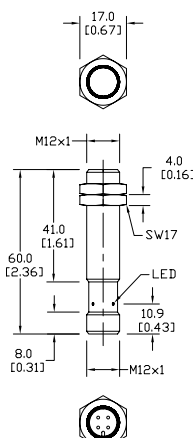


Figure 4

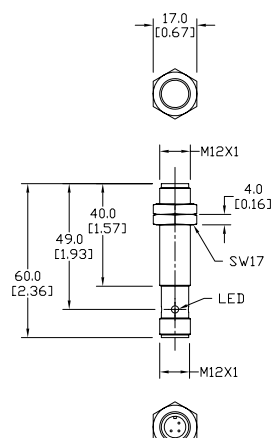


**Note: Pin 2 is not present on some models.**

# Accessories for 12mm Sensors

## Axial Mounting Bracket

Mounting bracket, axial, available in zinc-plated steel or 316L stainless steel. For use with 12mm sensors. Has two mounting holes (use 3mm screws) and allows the rotation of an optical axis for right-angle adapter sensors. Hexagonal nuts not included.

Accessories for 12mm Sensors				
Part Number	Price	Description	Drawing Link	Weight lb [g]
<a href="#"><u>ST12A</u></a>	\$97_:	Micro Detectors mounting bracket, axial, zinc plated steel. For use with 12mm sensors.	<a href="#"><u>PDF</u></a>	0.03 [13.6]
<a href="#"><u>ST12A7W</u></a>	\$97#:	Micro Detectors mounting bracket, axial, 316L stainless steel. For use with 12mm sensors.	<a href="#"><u>PDF</u></a>	0.03 [13.6]

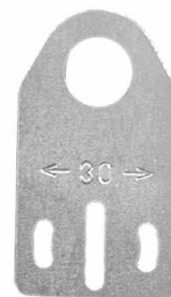

[ST12A](#)

## Right-angle Mounting Bracket

Mounting bracket, right-angle, zinc-plated steel or 316L stainless steel. For use with 12mm sensors. Has two mounting holes (use 3mm screws) and allows the rotation of an optical axis for axial sensors. Hexagonal screws not included.

Accessories for 12mm Sensors				
Part Number	Price	Description	Drawing Link	Weight lb [g]
<a href="#"><u>ST12C</u></a>	\$;97!:	Micro Detectors mounting bracket, right-angle, zinc plated steel. For use with 12mm sensors.	<a href="#"><u>PDF</u></a>	0.03 [13.6]
<a href="#"><u>ST12C7W</u></a>	\$97?:	Micro Detectors mounting bracket, right-angle, 316L stainless steel. For use with 12mm sensors.	<a href="#"><u>PDF</u></a>	0.03 [13.6]



[ST12C](#)

# Accessories for 12mm Sensors

## Right-angle Mounting Brackets

Mounting bracket, right-angle, fixed insertion stop adjustment, plastic. For use with 12mm sensors. Available with or without fixed insertion stop.

Accessories for 12mm Sensors				
Part Number	Price	Description	Drawing Link	Weight lb [g]
<a href="#"><u>OPT2102</u></a>	\$-1nlq:	Wenglor mounting bracket, right-angle, fixed insertion stop adjustment, plastic. For use with 12mm sensors.	<a href="#"><u>PDF</u></a>	0.05 [22.7]
<a href="#"><u>OPT2103</u></a>	\$-1nls:	Wenglor mounting bracket, right-angle, plastic. For use with 12mm sensors.	<a href="#"><u>PDF</u></a>	0.05 [22.7]



[OPT2102](#), [OPT2103](#)

## Right-angle Swivel Mounting Systems

Mounting bracket, right-angle swivel, 360 degree vertical and horizontal adjustment, 12mm rod mount. For use with 12mm sensors. Available in all stainless steel or with an aluminum head and stainless steel mounting plate.

Accessories for 12mm Sensors						
Part Number	Price	Description	Mounting Head	Mounting Plate	Drawing Link	Weight lb [g]
<a href="#"><u>OPT2114</u></a>	\$;-1nl[:	Wenglor mounting bracket, right-angle swivel, 360 degree vertical and horizontal adjustment, aluminum, 12mm rod mount. For use with 12mm sensors.	Aluminum	Stainless steel	<a href="#"><u>PDF</u></a>	0.14 [63.5]
<a href="#"><u>OPT2115</u></a>	\$-1nl_:	Wenglor mounting bracket, right-angle swivel, 360 degree vertical and horizontal adjustment, 304 stainless steel, 12mm rod mount. For use with 12mm sensors.	304 Stainless steel	304 Stainless steel	<a href="#"><u>PDF</u></a>	0.27 [122.5]

Note: 304 stainless steel mounting rods sold separately: [OPT2109](#) (200mm [7.87 in] length), [OPT2110](#) (300mm [11.81 in] length), and [OPT2111](#) (500mm [19.69 in] length).



[OPT2114](#), [OPT2115](#)

# Mounting Rods and Brackets

## Mounting Rods

304 Stainless steel rods for mounting swivel brackets [OPT2112](#) - [OPT2127](#). Available in three lengths: 200mm, 300mm, and 500mm. 12mm diameter.

Mounting Rods for OPT2112-2127 Swivel Mounting Brackets				
Part Number	Price	Description	Drawing Link	Weight lb (g)
<a href="#">OPT2109</a>	\$1nn9:	Wenglor mounting rod, 12mm diameter, 200mm length, 304 stainless steel.	<a href="#">PDF</a>	0.41 [185.97]
<a href="#">OPT2110</a>	\$1nna:	Wenglor mounting rod, 12mm diameter, 300mm length, 304 stainless steel.	<a href="#">PDF</a>	0.60 [272.16]
<a href="#">OPT2111</a>	\$1nnb:	Wenglor mounting rod, 12mm diameter, 500mm length, 304 stainless steel.	<a href="#">PDF</a>	0.98 [444.52]



## Right-angle Mounting Bracket

Mounting bracket, right-angle, nickel-plated brass. For use with 12mm mounting rods [OPT2109](#), [OPT2110](#) & [OPT2111](#).

Right-angle Mounting Brackets for 12mm Sensors				
Part Number	Price	Description	Drawing Link	Weight lb [g]
<a href="#">OPT2108</a>	\$-1nly:	Wenglor mounting bracket, right-angle, nickel-plated brass. For use with 12mm mounting rods OPT2109, OPT2110 & OPT2111.	<a href="#">PDF</a>	0.07 [31.8]

