

# RHINO Power Supply Accessories PSB Series

## Buffer Module

The RHINO [PSB24-BFM20S](#) buffer module is a cost effective alternative to battery-based backup systems. Utilizing electrolytic capacitors the buffer module is maintenance free and will maintain the output voltage of a 24VDC power supply system for 250 msec minimum with a 20A load and 5 sec minimum with a 1A load. A switch is provided to select the voltage level to start buffering. An inhibit input is available for remote shutdown as well as output signals for remote stand-by and buffering mode indication. The module is housed in a corrosion-resistant aluminum chassis with IP20 terminals and conformal coated circuit board for protection against demanding environments.


## Features

- Corrosion-resistant aluminum housing
- Long minimum buffering time of 250ms @ 24V/20A
- Units can be connected in parallel to increase buffering time
- Less than 30 second charging time locations
- P20 wiring terminals
- Overvoltage / Overcurrent / Short Circuit protections
- 3-year warranty



Buffer Module	
<b>Part Number</b>	<b><a href="#">PSB24-BFM20S</a></b>
<b>Price</b>	\$,00e7f:
<b>Drawing Link</b>	<a href="#">PDF</a>
<b>Weight kg [lb]</b>	0.76 [1.68]
<b>Buffer Module Input Specifications</b>	
<b>Nominal Input Voltage</b>	24VDC
<b>Voltage Range</b>	22.8 to 28.8 VDC [35VDC Max]
<b>Input Current</b>	Charging mode: < 0.6 A; Discharging mode: 20A Max
<b>Input Power</b>	2.5 W average
<b>Maximum Signal Input (Inhibit)</b>	35V / 10mA
<b>Max Inrush Current</b>	< 20A
<b>Charging Time</b>	< 30sec
<b>Buffer Module Output Specifications</b>	
<b>Nominal Output Voltage</b>	24VDC typ. [depends on $V_{in}$ ]
<b>Adjustment Range Of The Voltage</b>	22 to 28VDC Switch = "Fix 22V" - Buffering starts if terminal voltage falls below 22V Factory Setting, Switch = " $V_{in}$ - 1V" - Buffering starts if terminal voltage is decreased by >1V
<b>Maximum Output Voltage</b>	35VDC
<b>Output Current</b>	20A max
<b>Buffering Time</b>	250ms Min @ 24V / 20A Load, 5sec Min @ 24V / 1A Load [Refer to Fig.1]
<b>Maximum Signal Output</b>	35V / 10mA
<b>Signals</b>	Inhibit Signal [I] - "Low" = shuts down buffer module Ready Signal [R] - "High" = buffer module is fully charged or in standby mode Buffering Signal [B] - "High" = Buffer module is discharging or in buffering mode Supply Voltage (+Vs) - Common +Vs, 35V Max
<b>Noise and Ripple (20MHz)</b>	<200mVpp @ 25°C [77°F] during buffering mode
<b>Parallel Connection</b>	Yes [requires PSB60-REM redundancy module]
<b>Series Connection</b>	No
<b>Protective Device</b>	Transient voltage suppressor [TVS] for signals

# RHINO Power Supply Accessories PSB Series

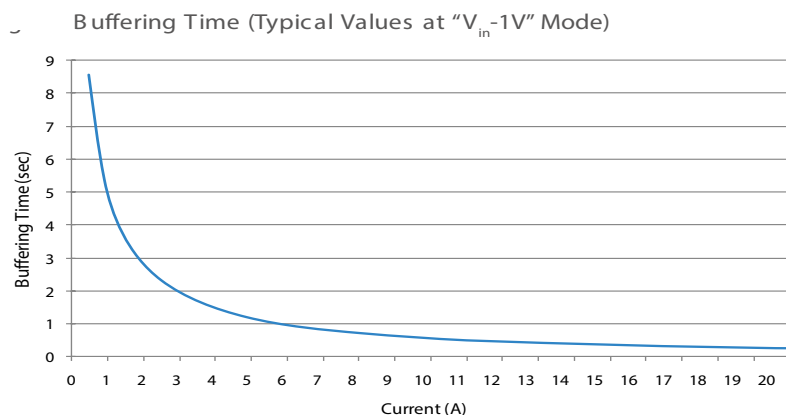**Figure 1**


Mechanical Specifications	
Case Cover	Aluminum
LED Indicators	Green LED Off - Unit is discharged or $V_{in} < 22VDC$ Green LED On - Unit is fully charged
Cooling System	Convection
Terminal	Input / Output - M3 x 2 pins [Rated 300V / 30A] Signal - M3 x 5 pins [Rated 300V / 30A]
Wire	Input / Output - AWG 12-10 [0.08-0.10 in]; Torque: 0.72 Nm [6.3 lb-in] Signal - AWG 24-10 [0.02-0.10 in]; Torque: 0.72 Nm [6.3 lb-in]
Environmental Specifications	
Operating Temperature	-25 to 75°C [-13 to 167°F]
Storage Temperature	-25 to 85°C [-13 to 185°F]
Power De-rating	>70°C [158°F] de-rate power by 5% / °C
Operating Humidity	<95% RH [Non-Condensing]
Operating Altitude	2,500 Meters
Shock Test (Non-Operating)	IEC60068-2-27, 30G [300m/S <sup>2</sup> ] for a duration of 18ms
Vibration (Non-Operating)	IEC60068-2-6, 10 Hz to 500 Hz @ 30m/S <sup>2</sup> [3G peak]; 60 min per axis for all X, Y, Z direction
Pollution Degree	2
Protection Specifications	
Overvoltage	32V ± 10%
Overload / Overcurrent	30A Max
Short Circuit	No damage
Penetration Protection	> 3.5 mm [eg. screws, small parts]
Reverse Polarity Protection	Yes
Degree of Protection	IP20
Protection Against Shock	Class I with GND connection

# RHINO Power Supply Accessories PSB Series

Reliability Specifications	
<b>MTBF (at <math>V_{in}</math>-1V Mode)</b>	>2,800,000 hrs. as per Telcordia SR-332 at Standby Mode [Buffer Module in Ready State]
<b>Expected Capacitor Life</b>	10 years [Standby mode @ 40°C]
Safety Standards / Directives	
<b>Electronic Equipment in Power Installations</b>	EN50718 / IEC62103
<b>Electrical Safety (Information Technology Equipment)</b>	UR/cUR recognized to UL60950-1 and CSA C22.2 No. 60950-1 File no. E198298, CB scheme to IEC60950-1
<b>Industrial Control Equipment</b>	UL/cUL listed to UL508 and CSA C22.2 No. 107.1-01 File no. E197592, CSA to CSA C22.2 No. 107.1-01; File No. 249074
<b>Hazardous Location</b>	cCSAus to CSA C22.2 No. 213-M1987, ANSI / ISA 12.12.01:2007 [Class I, Division 2, Group A,B,C,D T4, Ta = -25°C to +75°C (> +70°C derating)], File No. 249074
<b>CE</b>	in conformance with EMC Directive 2004/108/EC and Low Voltage Directive 2006/95/EC
<b>Materials and Parts</b>	RoHS Directive 2011/65/EU Compliant
<b>Galvanic Isolation</b>	Input & Output to Ground - 1.5 KVAC Signal to Ground - 1.5 KVAC
EMC Specifications	
<b>EMC / Emissions</b>	CISPR32, EN55032, EN55011
<b>Component Power Supply for General Use</b>	EN61204-3
<b>Immunity</b>	EN55024, EN61000-6-2
<b>Electrostatic Discharge</b>	EN61000-4-2
<b>Radiated Field</b>	EN61000-4-3
<b>Fast Transient / Burst</b>	EN61000-4-4
<b>Surge</b>	IEC61000-4-5
<b>Conducted</b>	EN61000-4-6
<b>Power Frequency Magnetic Fields</b>	EN61000-4-8
<b>Voltage Dips</b>	EN61000-4-11
<b>Low Energy Pulse Test (Ring Wave)</b>	EN61000-4-12

Note: Product intended to be used as Apparatus with AC-DC Power Supply, EMC compliance to be verified in correspondence to the connected units.


## PSB24-BFM20S

Wiring Connection			
Input		Output	
+	DC+	R	Ready
-	DC+	B	Buffering
I	Inhibit	+Vs	+ Voltage Supply
		$\perp$	Ground


# RHINO Power Supply Accessories PSB Series

Buffering, Ready, and Inhibit Signal	
<b>Buffering Output Signal (B)</b>	"High" = PSB24-BFM20S is discharging or in Buffering Mode
<b>Ready Output Signal (R)</b>	"High" = PSB24-BFM20S is fully charged or in Standby Mode
<b>Inhibit Input Signal (I)</b>	"Low" = Shuts down Buffer Module
<b>Signal Voltage</b>	+VS: 10–35 VDC
<b>Maximum Signal Current</b>	10mA
<b>Isolation (Signal to Power)</b>	1.5 KVAC

## I/O (input/output) Example

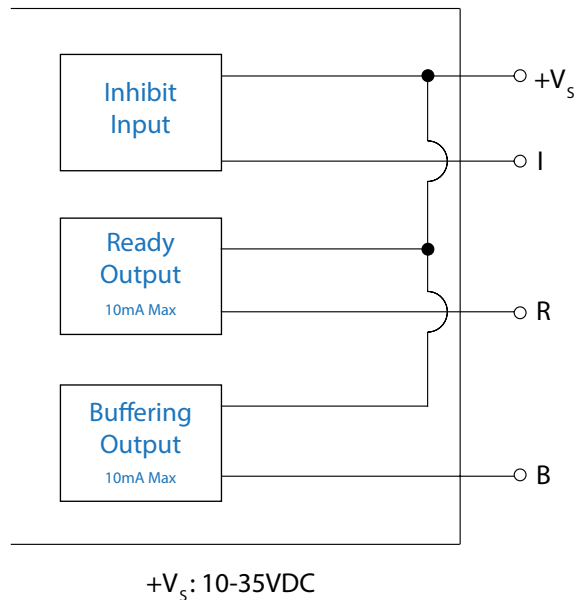


## Buffer Module Operations

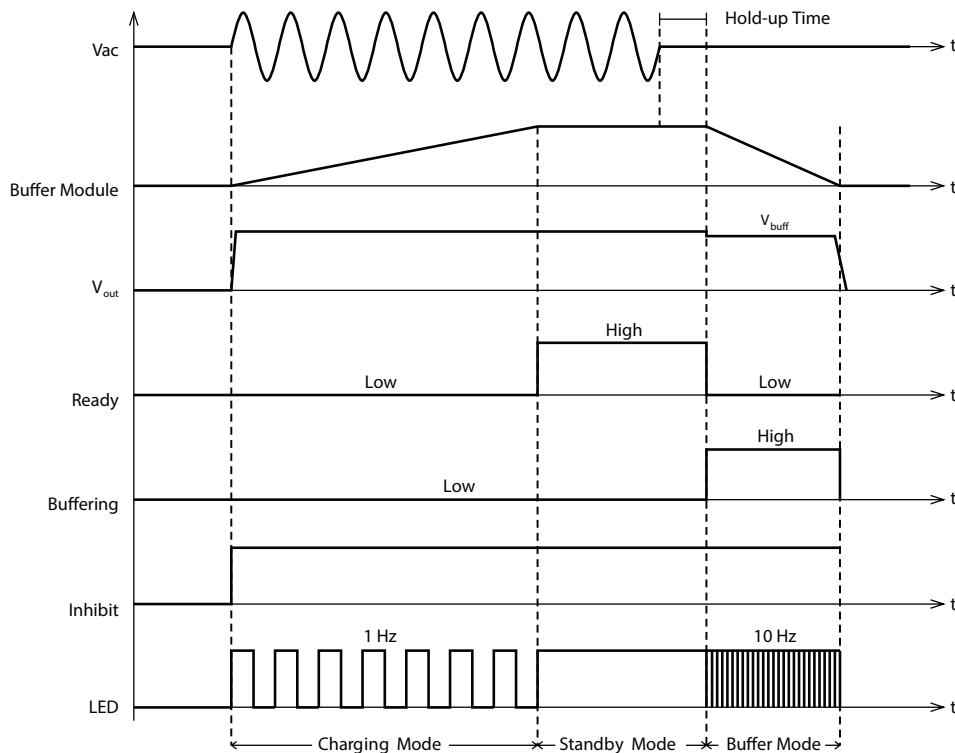


# RHINO Power Supply Accessories PSB Series

## Buffer Module Wiring


General connection / wiring diagram

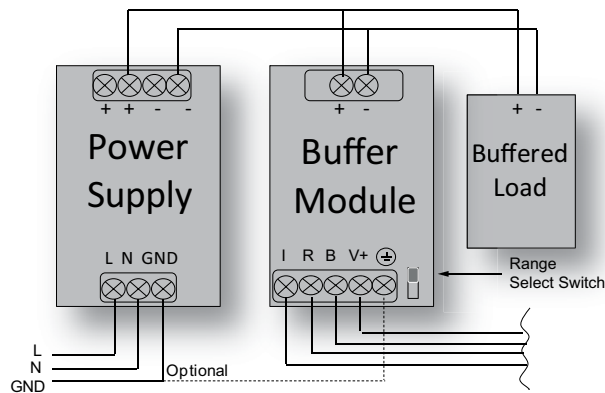

General signals wiring

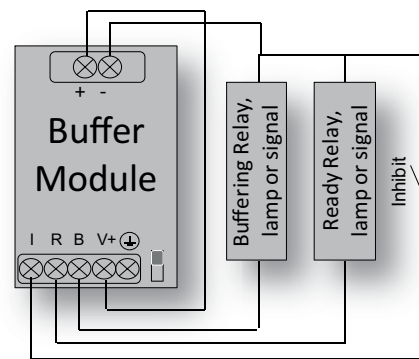

Paralleling of buffer units

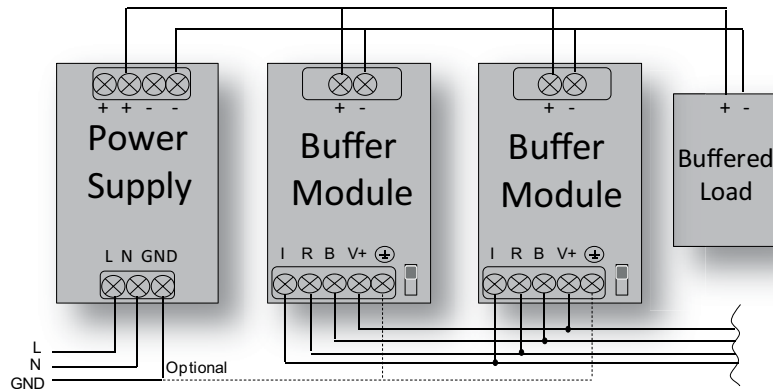

Decoupling of buffered branches

