

# PATLITE® Signal Devices

## 56mm Audible-Visual and Industrial Signal Beacon Multicolor IO-Link NE-IL Series

### Overview

The NE-IL series is designed with a multicolored LED that can display up to 7 selectable LED colors (Red, Amber, Green, Blue, White, Cyan, and Purple), enabling users to color-code different statuses and equipment conditions. Two parts offer touch to acknowledge. The NE-IL series beacons are compatible with IO-Link v1.1.

### Features


- Capacitive touch sensor enables real-time status confirmations
- Features simultaneous use of continuous, flashing, and audible alarm conditions
- Toggle between 4 patterns (Red, Blue, White, or off) while in touch sensor mode
- High protection rating for operation in harsh environments
- M12 connector available for quick and easy wiring
- IO-Link v1.1




56mm Audible-Visual and Industrial Signal Beacon Multicolor IO-Link NE-IL Series Selection Chart											
Part Number	Price	Type	Bulb Type	Light Function	Light Colors	Voltage	Tone Type	Tone Frequency	Touch To Acknowledge	Drawing Link	Connection*
<b>NE-ILNB-M</b>	\$123.00	Audible-visual signal beacon	Integrated LED	Selectable permanent, flashing, double flash, triple flash	Red/Amber/ Green/Blue/ White/Cyan/ Purple	24VDC	(8) selectable 88db at 1m	2.5 kHz	No	<a href="#">PDF</a>	5-pin M12 connector A-coded
<b>NE-ILNN-M</b>	\$102.00	Industrial signal beacon	LED			24VDC	—	—	No	<a href="#">PDF</a>	
<b>NE-ILTB-M</b>	\$151.00	Audible-visual signal beacon	Integrated LED			24VDC	(8) selectable 88db at 1m	2.5 kHz	Yes	<a href="#">PDF</a>	
<b>NE-ILTN-M</b>	\$140.00	Industrial signal beacon	LED			24VDC	—	—	Yes	<a href="#">PDF</a>	

\* Requires a 5-pin female M12 cable, sold separately.

### Wiring Diagram

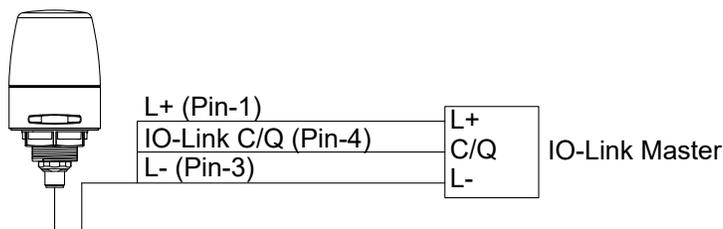

### M12 5-pin Connector

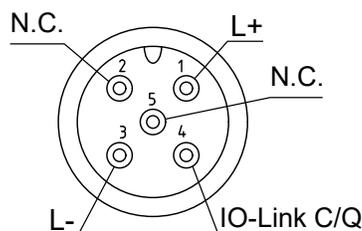

# PATLITE® Signal Devices

## 56mm Audible-Visual and Industrial Signal Beacon Multicolor IO-Link NE-IL Series

### Specifications

56mm Audible-Visual and Industrial Signal Beacon Multicolor IO-Link NE-IL Series Specifications					
Model		NE-ILNB-M	NE-ILNN-M	NE-ILTB-M	NE-ILTN-M
<b>Rated Voltage</b>		24VDC			
<b>Operating Voltage Range</b>		18–30 VDC			
<b>Rated Current Consumption</b>	<b>Typical</b>	80mA	40mA	80mA	40mA
	<b>Max</b>	100mA	50mA	100mA	50mA
<b>Rated Power Consumption</b>	<b>Typical</b>	2.0 W	1.0 W	2.0 W	1.0 W
	<b>Max</b>	2.4 W	1.2 W	2.4 W	1.2 W
<b>Inrush Current</b>		10A / 0.2 msec			
<b>Temperature Range</b>	<b>Operating</b>	-25 to 60°C [-13 to 140°F]			
	<b>Storage</b>	-40 to 75°C [-40 to 167°F]			
<b>Humidity Range</b>	<b>Operating</b>	Less than 90% (no condensation)			
	<b>Storage</b>				
<b>Mounting</b>		Indoor, vertical			
<b>Insulation Resistance</b>		More than 5MΩ at 500VDC between live part and non-current carrying metallic part			
<b>Withstand Voltage</b>		1 min at 500VAC between charging parts and non-charging metal parts			
<b>Protection Rating</b>		IP65, NEMA TYPE 4X, 13			
<b>Weight g [oz]</b>		100 [3.52]	90 [3.17]	100 [3.52]	90 [3.17]
<b>Housing Material</b>		Polycarbonate			
<b>Agency Approval</b>		UL 508, UR File: E215660, CSA-C22.2 No. 14			

To obtain the most current agency approval information, see the Agency Compliance & Certifications Checklist section on the specific part number's web page.

IO-Link Specifications	
<b>IO-Link</b>	v1.1
<b>Port Speed</b>	COM2 (38.4 kpbs)
<b>SIO Supported</b>	Yes
<b>ISDU Supported</b>	Yes
<b>Data Storage</b>	Yes
<b>Block Parameter</b>	Yes

# **PATLITE**® Signal Devices

## 56mm Visual-Audible and Industrial Signal Beacon Accessories NE-A and NE-IL Series

56mm Beacon Accessories NE-A and NE-IL Series				
Part Number	Price	Description	Weight g [oz]	Drawing Link
<a href="#"><u>NE-002D</u></a>	\$12.00	Patlite mounting bracket, wall mount, 56mm diameter, 82mm height, dark gray, polycarbonate. For use with Patlite NE-A and NE-IL series beacons.	34 [1.19]	<a href="#">PDF</a>
<a href="#"><u>NE-001D</u></a>	\$18.50	Patlite tube adapter, tube mount, 56mm diameter, black, polycarbonate. For use with Patlite NE-A and NE-IL series beacons.	31 [1.09]	<a href="#">PDF</a>
<a href="#"><u>SZP-092D</u></a>	\$6.50	Patlite tube adapter, tube mount, 1/2in NPT thread type, 56mm diameter, black, polycarbonate. For use with Patlite NE-A and NE-IL series beacons.	23 [0.81]	<a href="#">PDF</a>
<a href="#"><u>GA0000119-F1</u></a>	\$10.00	Patlite O-ring, silicone. For use with Patlite NE-A and NE-IL series beacons.	45.35 [1.5]	N/A
<a href="#"><u>POLE-100A21</u></a>	\$25.50	Patlite mounting pole, 22mm diameter, 100mm length, silver, aluminum. For use with Patlite NE-A and NE-IL series beacons.	29 [1.02]	<a href="#">PDF</a>
<a href="#"><u>POLE-300A21</u></a>	\$28.50	Patlite mounting pole, 22mm diameter, 300mm length, silver, aluminum. For use with Patlite NE-A and NE-IL series beacons.	86 [3.03]	<a href="#">PDF</a>
<a href="#"><u>POLE-800A21</u></a>	\$35.50	Patlite mounting pole, 22mm diameter, 800mm length, silver, aluminum. For use with Patlite NE-A and NE-IL series beacons.	228 [8.04]	<a href="#">PDF</a>
<a href="#"><u>SZ-010</u></a>	\$25.50	Patlite mounting bracket, flange mount, 100mm diameter, 65mm height, silver, aluminum. For use with Patlite NE-A and NE-IL series beacons.	122 [4.30]	<a href="#">PDF</a>
<a href="#"><u>SZ-016A</u></a>	\$28.50	Patlite mounting bracket, flange mount, 68mm diameter, 45mm height, silver, aluminum. For use with Patlite NE-A and NE-IL series beacons.	96 [3.38]	<a href="#">PDF</a>

[NE-002D](#)[NE-001D](#)[SZP-092D](#)[GA0000119-F1](#)[POLE-100A21](#)[SZ-010](#)[SZ-016A](#)