


# C-more Micro 3-inch EA1 Panel Accessories

## DC Power Adapter

The **C-more** Micro 3-inch EA1 series panel is designed to use the 5 VDC power that is available from an RJ12 serial communications port found on some **AutomationDirect** PLC's. The EA-MG-P1 DC Power Adapter requires power from a Class 2, 12-24 VDC source. This adapter is designed to easily snap on to the rear of a **C-more** Micro 3-inch EA1 series panel or the rear of an optional Keypad Bezel being used with a **C-more** Micro 3-inch EA1 series panel.


Part No. EA-MG-P1




\$34.50

### Dimensions


Units: inches [mm]

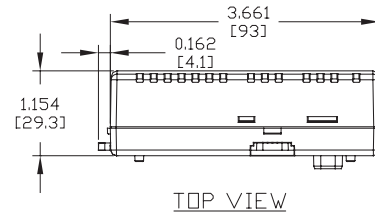

TOP VIEW




LEFT VIEW




REAR VIEW

### Panel overall depth with adapter installed

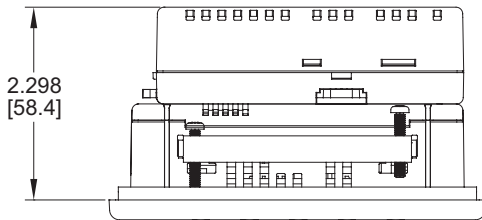

Units: inches [mm]



FRONT VIEW

### DC Power Adapter Specifications

<b>Part Number</b>	EA-MG-P1
<b>Electrical</b>	
• <b>Input Voltage</b>	12-24 VDC
• <b>Input Voltage Range</b>	10.8-26.4 VDC
• <b>Power Consumption</b>	100 mA @ 24 VDC
• <b>Maximum Power</b>	2.90 Watts
• <b>Maximum Inrush Current</b>	5 A @ 500 μs with 12 VDC applied, 10 A @ 500 μs with 24 VDC applied
• <b>Recommended Fuse</b>	Type AGC fast acting glass fuse, 750 mA, 250 VAC, ADC #AGC-75
• <b>Connector Type</b>	3-pin screw type terminal block
<b>Physical</b>	
• <b>Weight</b>	2.8 oz. [80 g]
<b>Environmental</b>	See environmental specifications at the beginning of this catalog section.



**NOTE: Recommended DC power supply to power either DC Power Adapter, AutomationDirect Part No. PSC-24-015 or PSC-24-030.**

# C-more Micro 3-inch EA1 Panel Accessories



## Clear Screen Overlay

Optional clear screen overlay used to protect **C-more** 3-inch Micro displays from minor scratches and wear. Package contains 5 clear screen overlays.

Part No. EA-MG-COV-CL

### Dimensions

Units: inches [mm]

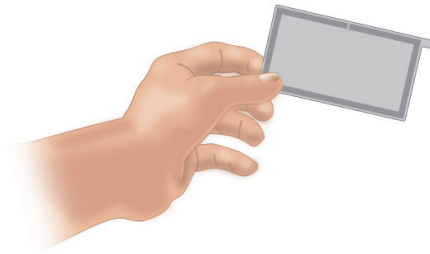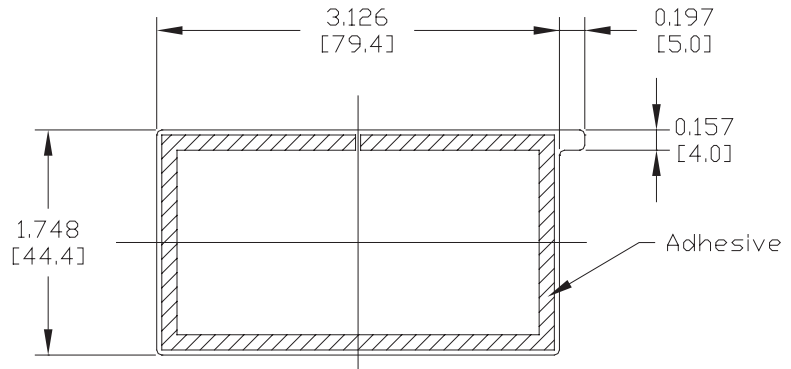

**\$38.50**

# C-more Micro 3-inch EA1 Replacement Parts

The optional replacement parts can be used to replace damaged, worn or lost **C-more** 3-inch Micro panel components.


## Replacement parts at a glance:

Part Number	Description	Price
<b>EA-MG-S3ML-BRK</b>	Panel mounting brackets, replacement. Package of 2. For use with <b>C-more</b> Micro 3in and EA3-T4CL HMIs.	\$19.00
<b>EA-MG-BZ1-BRK</b>	Panel mounting brackets, replacement. Package of 2. For use with <b>C-more</b> Micro bezel EA-MG-BZ1.	\$19.00
<b>EA-MG-BZ2-BRK</b>	Panel mounting brackets, replacement. Package of 8. For use with <b>C-more</b> Micro 4in and 6in panels, all 6in bezels, and 3in bezel EA-MG-BZ2.	\$20.00
<b>EA-MG-DC-CON</b>	DC 3-terminal power connector, replacement. Package of 5. For use with all <b>C-more</b> Micro 4in, 6in, 8in and 10in panels, and power adapters EA-MG-P1 and EA-MG-SP1.	\$15.50
<b>EA-MG-S3ML-GSK</b>	Panel mounting gasket, replacement. For use with <b>C-more</b> Micro EA1 series 3in HMIs.	\$13.50
<b>EA-MG-BZ1-GSK</b>	Panel mounting gasket, replacement. For use with <b>C-more</b> Micro 3in bezel EA-MG-BZ1.	\$16.50
<b>EA-MG-BZ2-GSK</b>	Panel mounting gasket, replacement. For use with <b>C-more</b> Micro 3in bezel EA-MG-BZ2.	\$16.50
<b>EA-MG-S3ML-FKL</b>	Function key label insert, replacement. Package of 10. For use with <b>C-more</b> Micro 3in panels. (5) blank labels (5) landscape F1-F5 label included.	\$10.00


**Panel Mounting Clips**  
Part No. EA-MG-S3ML-BRK




**Keypad Bezel 1 Mounting Clips**  
Part No. EA-MG-BZ1-BRK



**Keypad Bezel 2 Mounting Clips**  
Part No. EA-MG-BZ2-BRK

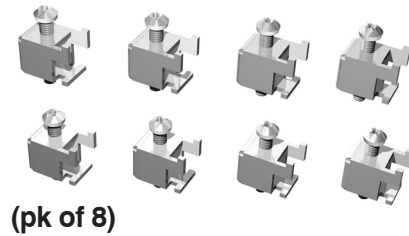

**DC Power Connector**  
Part No. EA-MG-DC-CON



**3-inch Panel Gasket**  
Part No. EA-MG-S3ML-GSK



**3-inch Keypad Bezel 1 Gasket**  
Part No. EA-MG-BZ1-GSK



**3-inch Keypad Bezel 2 Gasket**  
Part No. EA-MG-BZ2-GSK



**3-inch Panel Function Keys Label Inserts**  
Part No. EA-MG-S3ML-FKL

