


# P1AM-SERIAL Cut Sheet



ProductivityOpen serial shield, 2 ports, (2) RS-232/RS-485 (4-pin terminal) port(s). For use with ProductivityOpen P1AM-100 CPU.

For complete product information, please see this item on our store at the following link:

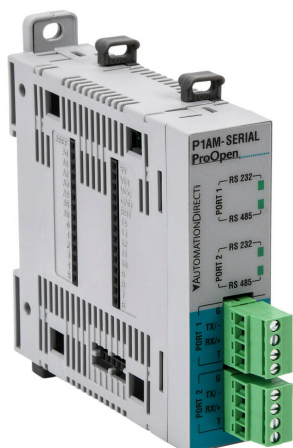

<https://www.automationdirect.com/pn/P1AM-SERIAL>

## Technical Specifications

<b>Brand</b>	ProductivityOpen
<b>Item</b>	Serial shield
<b>Number of Ports</b>	2
<b>Communication Port and Connection Type(s)</b>	(2) RS-232/RS-485 (4-pin terminal)
<b>Port Protocol(s)</b>	<ul style="list-style-type: none"><li>• ASCII In/out</li><li>• custom protocol(s)</li></ul>
<b>Port Speed(s)</b>	up to 115.2k baud
<b>For Use With</b>	ProductivityOpen P1AM-100 CPU
<b>Programming Software</b>	Arduino software (IDE) and ProductivityBlocks

## Agency Approvals

<b>UL Listed File #</b>	E139594
<b>UL Recognized File #</b>	None
<b>UL Hazardous File #</b>	None
<b>CE</b>	<a href="#">View CE declarations</a>
<b>CSA File #</b>	None
<b>RoHS Status</b>	Yes (See CE Doc)
<b>EU REACH</b>	<a href="#">View EU REACH document</a>