

# DW Series Analog Inductive Proximity Sensors



## M12 (12mm) Metal – Analog Output

- Voltage or current analog output
- Metal housing
- Axial cable or M12 quick-disconnect models
- IP67 rated
- Purchase cable separately (for quick-disconnect model)
- Lifetime warranty



### DW Series M12 Analog Inductive Proximity Selection Chart

Part Number	Price	Sensing Range	Mounting	Output	Connection	Wiring	Dimensions
<a href="#">DW-AD-509-M12</a>	\$105.00	0-6 mm [0.236 in]	Semi-flush	0-5 VDC / 1-5 mA	2m [6.5 ft] axial cable	Diagram 1	Figure 1
<a href="#">DW-AS-509-M12</a>	\$105.00		Semi-flush	0-5 VDC / 1-5 mA	M12 [12mm] quick-disconnect	Diagram 1	Figure 2
<a href="#">DW-AD-509-M12-390</a>	\$105.00		Semi-flush	0-10 VDC / 4-20 mA	2m [6.5 ft] axial cable	Diagram 1	Figure 1
<a href="#">DW-AS-509-M12-390</a>	\$105.00		Semi-flush	0-10 VDC / 4-20 mA	M12 [12mm] quick-disconnect	Diagram 1	Figure 2

### DW Series M12 Analog Inductive Proximity Specifications


Specification	DW-Ax-509-M12	DW-Ax-509-M12-390
Mounting Type	Semi-flush	
Nominal Distance	0-6 mm [0.236 in]	
Operating Distance	NA	
Material Correction Factors	See the <a href="#">Material influence table</a>	
Output Type	0-5 VDC / 1-5 mA	0-10 VDC / 4-20 mA
Current Output Max. Load / Power Supply	1k $\Omega$ / 10VDC; 5 k $\Omega$ / 30VDC	0.5k $\Omega$ / 15VDC; 1 k $\Omega$ / 30VDC
Voltage Output Min. Load	500 $\Omega$	1k $\Omega$
Operating Voltage	10-30 VDC	15-30 VDC
No-load Supply Current	$\leq$ 10mA	$\leq$ 12mA
Operating (Load) Current	$\leq$ 10mA	
Off-state (Leakage) Current	NA	
Voltage Drop	$\leq$ 2.0 V	
Switching Frequency	NA	
Differential Travel (% of Nominal Distance)	NA	
Repeat Accuracy	$\pm$ 0.01 mm	
Ripple	$\leq$ 20%	
Response Time	1ms	
Time Delay Before Availability (tv)	$\leq$ 50ms	
Reverse Polarity Protection	Yes	
Short-Circuit Protection	Yes (switch auto-resets after overload is removed)	
Operating Temperature	-25 to +70°C [-13 to 158°F]	
Protection Degree (DIN 40050)	IEC IP67	
Indication/Switch Status	NA	
Housing Material	Chrome-plated brass	
Sensing Face Material	Polybutylene Terephthalate (PBT)	
Shock/Vibration	IEC 60947-5-2	
Tightening Torque	10 N•m [7.37 lb•ft]	
Weight (cable/M12 connector)	95g [3.35 oz] / 33g [1.16 oz]	
Connection	2m [6.5 ft] axial cable or M12 [12mm] connector	
Agency Approvals	UL file E239373	

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.


# DW Series Analog Inductive Proximity Sensors

## Wiring Diagram


Diagram 1

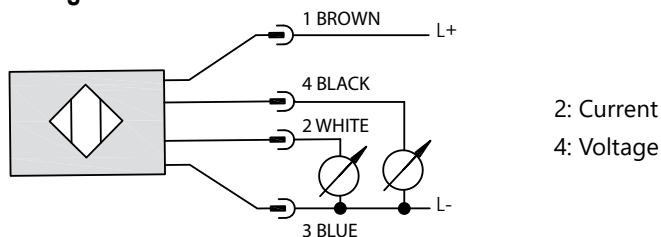

Connector



## Installation

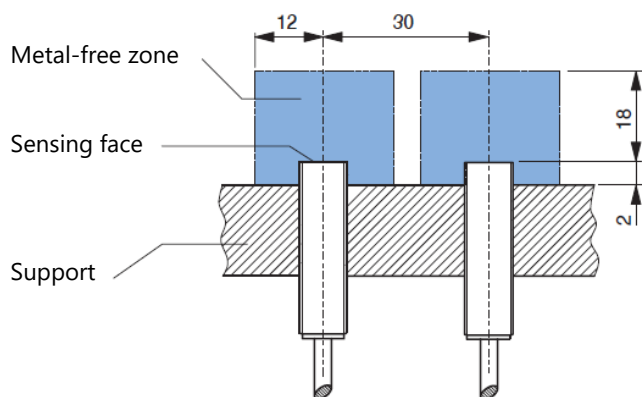

## Dimensions

mm [inches]

Figure 1


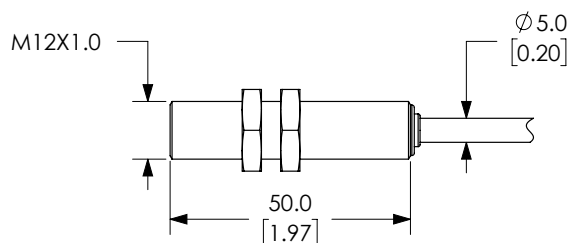


Figure 2

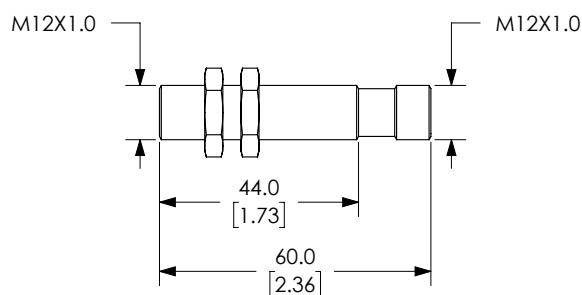

# Accessories for 12mm Sensors

## Axial Mounting Bracket

Mounting bracket, axial, available in zinc-plated steel or 316L stainless steel. For use with 12mm sensors. Has two mounting holes (use 3mm screws) and allows the rotation of an optical axis for right-angle adapter sensors. Hexagonal nuts not included.

Accessories for 12mm Sensors				
Part Number	Price	Description	Drawing Link	Weight lb [g]
<a href="#"><u>ST12A</u></a>	\$2.25	Micro Detectors mounting bracket, axial, zinc plated steel. For use with 12mm sensors.	<a href="#"><u>PDF</u></a>	0.03 [13.6]
<a href="#"><u>ST12A7W</u></a>	\$8.00	Micro Detectors mounting bracket, axial, 316L stainless steel. For use with 12mm sensors.	<a href="#"><u>PDF</u></a>	0.03 [13.6]



[ST12A](#)

## Right-angle Mounting Bracket

Mounting bracket, right-angle, zinc-plated steel or 316L stainless steel. For use with 12mm sensors. Has two mounting holes (use 3mm screws) and allows the rotation of an optical axis for axial sensors. Hexagonal screws not included.

Accessories for 12mm Sensors				
Part Number	Price	Description	Drawing Link	Weight lb [g]
<a href="#"><u>ST12C</u></a>	\$2.25	Micro Detectors mounting bracket, right-angle, zinc plated steel. For use with 12mm sensors.	<a href="#"><u>PDF</u></a>	0.03 [13.6]
<a href="#"><u>ST12C7W</u></a>	\$8.00	Micro Detectors mounting bracket, right-angle, 316L stainless steel. For use with 12mm sensors.	<a href="#"><u>PDF</u></a>	0.03 [13.6]



[ST12C](#)

# Accessories for 12mm Sensors

## Right-angle Mounting Brackets

Mounting bracket, right-angle, fixed insertion stop adjustment, plastic. For use with 12mm sensors. Available with or without fixed insertion stop.

Accessories for 12mm Sensors				
Part Number	Price	Description	Drawing Link	Weight lb [g]
<a href="#"><u>OPT2102</u></a>	\$8.75	Wenglor mounting bracket, right-angle, fixed insertion stop adjustment, plastic. For use with 12mm sensors.	<a href="#"><u>PDF</u></a>	0.05 [22.7]
<a href="#"><u>OPT2103</u></a>	\$8.75	Wenglor mounting bracket, right-angle, plastic. For use with 12mm sensors.	<a href="#"><u>PDF</u></a>	0.05 [22.7]



[OPT2102](#), [OPT2103](#)

## Right-angle Swivel Mounting Systems

Mounting bracket, right-angle swivel, 360 degree vertical and horizontal adjustment, 12mm rod mount. For use with 12mm sensors. Available in all stainless steel or with an aluminum head and stainless steel mounting plate.

Accessories for 12mm Sensors						
Part Number	Price	Description	Mounting Head	Mounting Plate	Drawing Link	Weight lb [g]
<a href="#"><u>OPT2114</u></a>	\$12.50	Wenglor mounting bracket, right-angle swivel, 360 degree vertical and horizontal adjustment, aluminum, 12mm rod mount. For use with 12mm sensors.	Aluminum	Stainless steel	<a href="#"><u>PDF</u></a>	0.14 [63.5]
<a href="#"><u>OPT2115</u></a>	\$22.50	Wenglor mounting bracket, right-angle swivel, 360 degree vertical and horizontal adjustment, 304 stainless steel, 12mm rod mount. For use with 12mm sensors.	304 Stainless steel	304 Stainless steel	<a href="#"><u>PDF</u></a>	0.27 [122.5]



[OPT2114](#), [OPT2115](#)

Note: 304 stainless steel mounting rods sold separately: [OPT2109](#) (200mm [7.87 in] length), [OPT2110](#) (300mm [11.81 in] length), and [OPT2111](#) (500mm [19.69 in] length).

# Mounting Rods and Brackets

## Mounting Rods

304 Stainless steel rods for mounting swivel brackets [OPT2112](#) - [OPT2127](#). Available in three lengths: 200mm, 300mm, and 500mm. 12mm diameter.

Mounting Rods for OPT2112-2127 Swivel Mounting Brackets				
Part Number	Price	Description	Drawing Link	Weight lb (g)
<a href="#">OPT2109</a>	\$14.00	Wenglor mounting rod, 12mm diameter, 200mm length, 304 stainless steel.	<a href="#">PDF</a>	0.41 [185.97]
<a href="#">OPT2110</a>	\$17.50	Wenglor mounting rod, 12mm diameter, 300mm length, 304 stainless steel.	<a href="#">PDF</a>	0.60 [272.16]
<a href="#">OPT2111</a>	\$22.50	Wenglor mounting rod, 12mm diameter, 500mm length, 304 stainless steel.	<a href="#">PDF</a>	0.98 [444.52]



## Right-angle Mounting Bracket

Mounting bracket, right-angle, nickel-plated brass. For use with 12mm mounting rods [OPT2109](#), [OPT2110](#) & [OPT2111](#).

Right-angle Mounting Brackets for 12mm Sensors				
Part Number	Price	Description	Drawing Link	Weight lb [g]
<a href="#">OPT2108</a>	\$17.50	Wenglor mounting bracket, right-angle, nickel-plated brass. For use with 12mm mounting rods <a href="#">OPT2109</a> , <a href="#">OPT2110</a> & <a href="#">OPT2111</a> .	<a href="#">PDF</a>	0.07 [31.8]

