

# Enclosure LED Lights Magnet or Screw Mounted



Magnet mount

## Applications

- Suitable for all types of panels and enclosures, especially where space is at a premium
- Suitable for daisy-chaining
- Allows for up to 10 lights to be connected to each other

## Features

- Energy saving LED technology
- Available with magnet or screw mounts allowing them to be easily positioned in any enclosure.
- Magnet mount has powerful non-slip rubberized magnets and work on ferrous steel only
  - Wide voltage range.



## Listings

- UL File No. E234324
- CE, VDE, EAC




Screw mount

Enclosure LED Lights Specifications	
<b>Power Consumption</b>	Max. 5W (~75 W incandescent bulb)
<b>Luminosity</b>	400 Lm at 120° (1,200 Lm at 360° or equivalent 95 W light bulb)
<b>Lamp Type</b>	LED, 120° angle of radiation light color – daylight, color temperature – 6,000 to 7,000 K
<b>Service Life</b>	60,000 hrs. at 68°F [20°C]
<b>Connection</b>	2-pole plug with snap lock (order separately)
<b>Housing</b>	plastic, transparent
<b>Mounting</b>	Magnet or M5 screws (not included), 9.8" (250 mm) centers
<b>Operating / Storage Temperature</b>	-22 to 140°F [-30 to 60°C] / -40 to 185°F [-40 to 85°C]
<b>Operating / Storage Humidity</b>	max. 90% RH (non-condensing)
<b>Protection Class</b>	II (double insulated)
<b>Protection Type</b>	IP20
<b>Approvals</b>	CE, UL Recognized File No.: E234324, VDE, EAC, RoHS 2 compliant

Enclosure LED Lights					
Magnet Mount	Price	Screw Mount	Price	Operating Voltage	Switch Type
<a href="#">025400-00</a>	\$89.00	<a href="#">025400-01</a>	\$78.00	100-240 VAC, 50/60 Hz (min. 90 VAC, max. 265 V)	On/Off Switch <sup>2</sup>
<a href="#">025401-00</a>	\$136.00	<a href="#">025401-01</a>	\$124.00	24-48 VDC (min. 20 VDC, max. 60 VDC)	
<a href="#">025410-00</a>	\$151.00	<a href="#">025410-01</a>	\$140.00	100-240 VAC, 50/60 Hz (min. 90 VAC, max. 265 V)	PIR Motion Sensor <sup>1,3</sup>
<a href="#">025411-00</a>	\$207.00	<a href="#">025411-01</a>	\$196.00	24-48 VDC (min. 20 VDC, max. 60 VDC)	

Notes: <sup>1</sup>Passive Infrared (PIR) motion sensor is factory preset to turn the light OFF five minutes after all action ceases.  
<sup>2</sup>Weight: 0.30 lb [135 g]  
<sup>3</sup>Weight: 0.31 lb [140 g]


## Dimensions

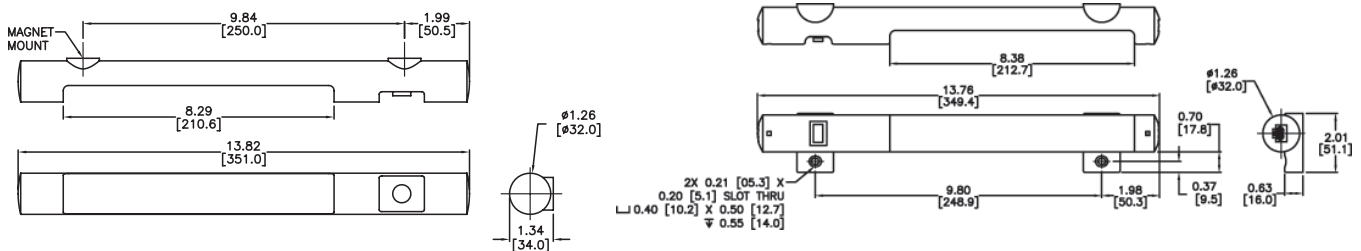

# Enclosure Accessories - LED Light Accessories



## Power cable with input connector and wire leads

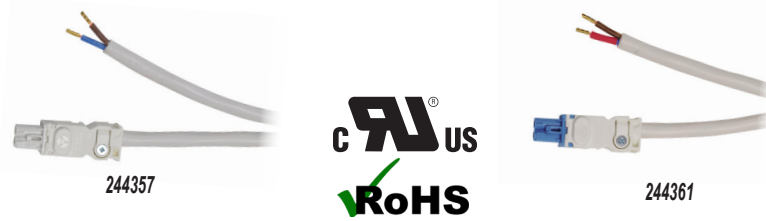

Part Number	Price	Description	Length	Voltage	Color
<a href="#">244357</a>	\$25.00	Connection cable 2 x 15 AWG with input connector	6.5 ft (2.0 m)	AC	Connectors: white; Cable: white
<a href="#">244361</a>	\$25.00	Connection cable 2 x 15 AWG with input connector		DC	Connectors: blue; Cable: white


## Extension cable with 2 connectors for daisy chain (input & output) connection



Part Number	Price	Description	Length	Voltage	Color
<a href="#">244359</a>	\$30.00	Extension cable 2 x 15 AWG with 2 connectors	3.2 ft (1.0 m)	AC	Connectors: white; Cable: white
<a href="#">244363</a>	\$30.00	Extension cable 2 x 15 AWG with 2 connectors		DC	Connectors: blue; Cable: white

## Power Input and Output Connectors

(Field Wireable)

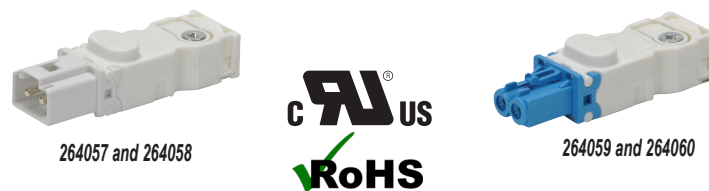

Part Number	Price	Description	Voltage	Color
<a href="#">264057</a>	\$7.50	Input connector	AC	White
<a href="#">264058</a>	\$7.00	Output connector		
<a href="#">264059</a>	\$7.50	Input connector	DC	Blue
<a href="#">264060</a>	\$7.00	Output connector		