



# FUSERBLOC UL 489 Compact Fusible Disconnect Switches

To assemble a switch, please select:

**Direct Operation**

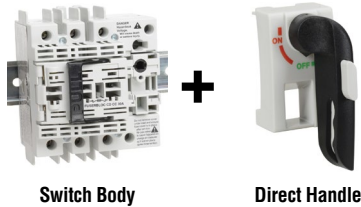

**External Operation**

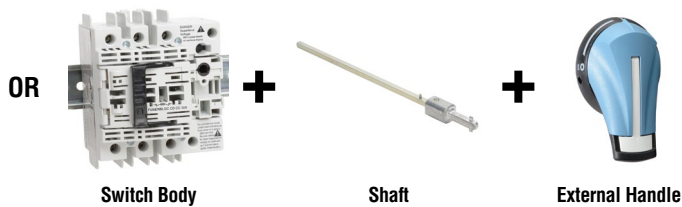

UL 489 Compact Fusible Disconnect Switches				
Part Number	Description	Frame Size	Fuse Type	Price
37103003	Compact UL 489 fusible front operated switch, 30A, 600VAC, 3-pole	1	Class CC	\$87.25
37104003	Compact UL 489 fusible front operated switch, 30A, 600VAC, 3-pole with switched neutral			\$112.00
37105003	Compact UL 489 fusible front operated switch, 30A, 600VAC, 3-pole with unswitched neutral			\$105.75
37103004	Compact UL 489 fusible front operated switch, 30A, 600VAC, 3-pole	2	Class J	\$87.25
37104004	Compact UL 489 fusible front operated switch, 30A, 600VAC, 3-pole with switched neutral			\$112.25
37105004	Compact UL 489 fusible front operated switch, 30A, 600VAC, 3-pole with unswitched neutral			\$106.00


Handles									
Part Number	Description	Switch Body Rating (A)	Handle Color	Handle Type	NEMA/UL Type	Test	Price		
37294012	Direct handle for class CC disconnect switches*	30	Black	-	-	-	\$15.00		
37294014	Direct handle for class J disconnect switches*	30	Black	-	-	-	\$15.00		
14930111	Front operation handle for compact UL 489 fusible disconnect switches, defeatable and lockable	30	Black/Blue	S0	1, 3R, 12	I - O	\$16.75		
14940111		30	Red/Yellow	S0		I - O	\$16.75		
149D0111		30	Black/Blue	S0	4, 4X	I - O	\$19.25		
149E0111		30	Red/Yellow	S0		I - O	\$19.25		
141F2111		30	Black/Blue	S1	1, 3R, 12	I - O	\$21.25		
141G2111		30	Red/Yellow	S1		I - O	\$21.25		
141D2111		30	Black/Blue	S1	4, 4X	I - O	\$28.00		
141E2111		30	Red/Yellow	S1		I - O	\$28.00		
141D2115		30	Black/Blue	S1		I - O - Test	\$29.50		
141E2115		30	Red/Yellow	S1		I - O - Test	\$29.50		
141D2911		External heavy duty front handles, shaft required**	30	Black/Blue		S1	4, 4X	I - O	\$32.25
141E2911			30	Red/Yellow		S1		I - O	\$32.25



\* Defeatable

\*\*Heavy duty handles have larger metal hasp to accommodate multiple locking devices.

Shafts for External Handles					
Part Number	Switch Body Rating (A)	Handle Type	Length		Price
			in	mm	
14050620	30	S0	7.9	200	\$7.25
14050632			12.6	320	\$8.75
14050640			15.7	400	\$9.50
14010520		S1	7.9	200	\$6.75
14010532			12.6	320	\$8.00
14010540			15.7	400	\$9.00



# FUSERBLOC UL 489 Compact Fusible Disconnect Switches



Shaft Guide for External Handle			
Part Number	Description	Fits Handle Type	Price
14290000	This accessory makes alignment connections between the shaft and handle easier. Allows up to 15mm misalignment tolerance. Required for a shaft length longer than 300mm. Included with longer shafts.	S01, S1, S2, S3	\$4.75
14190000		S00, S0	\$1.50




14290000

Auxiliary Contacts				
Part Number	Description	Switch Body Rating (A)	Contacts	Price
39990701	Front mount auxiliary contacts can be configured to be operated on standard and TEST position switches. Each slot can accommodate up to 2 interlocked auxiliary contacts. 3A @ 240VAC.	30 - 600	1 NO	\$6.25
39990702			1 NC	\$6.25
For 30 to 200A/J, maximum of 4 auxiliary contacts				



39990701

NFPA 79 "Through the Door" Kit				
Part Number	Description	Switch Body Rating (A)	Frame Size	Price
37294532	Allows retrofit of installations for 30A ratings. Meets both UL 508A and NFPA 79 requirements. Order an S1-type external handle separately.	30	1, 2	\$33.25



37294532

## Technical Characteristics

Characteristics According to UL 489 / CSA 22.2#5		
	37103003, 37104003 37105003	37103004, 37104004 37105004
<b>General use rating (A)</b>	30	30
<b>Short circuit rating at 600VAC (kA)</b>	100	100
<b>Type of fuse</b>	CC	J
<b>Maximum fuse rating (A)</b>	30	30
<b>Operational power (hp) / current max operation 3-phase (A)</b>		
220-240 VAC	7.5 / 22	7.5 / 22
440-480 VAC	15 / 21	15 / 21
600VAC	20 / 22	20 / 22
125VDC <sup>1</sup>	3 / 25	3 / 25
250VDC <sup>2</sup>	5 / 20	5 / 20
<b>Product weight – lb (kg)</b>	1.3 (0.6)	1.4 (0.6)
<b>Environmental – switch body</b>		
<b>Operating temperature<sup>3</sup></b>	-20°C to 70°C (-4°F to +158°F)	
<b>Flammability rating</b>	UL 94-V0	
<b>Mechanical endurance</b>		
<b>Endurance (number of operating cycles)</b>	10,000	10,000
<b>Operating torque (lb-in / N-m)</b>	3.5	3.5
<b>Mounting</b>	35mm DIN rail or panel mount	
<b>Connection</b>		
<b>Min. connection cross-section (AWG)<sup>2</sup></b>	#14	#14
<b>Max. connection cross-section (AWG)<sup>2</sup></b>	#10	#10
<b>Torque - lb-in (N-m)</b>	27 (3)	27 (3)
<b>Agency Approvals</b>		
UL file # E255272 (UL 489, C22.2 No.5)		

<sup>1</sup> 2 poles in series

<sup>2</sup> 3 poles in series

<sup>3</sup> Temperatures above 40°C, the current rating of the switch has to be de-rated 1% per °C over 40°C. Example, at 60°C a 100A switch is rated 80A



Note: Short-circuit rating achieved when used with corresponding fuse type and max fuse rating.

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

# FUSERBLOC UL 489 Compact Fusible Disconnect Switches



## Dimensions [inches/mm]

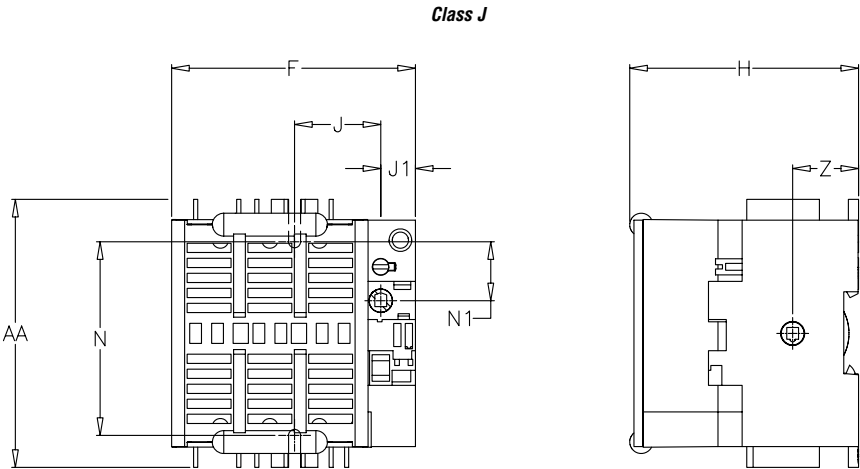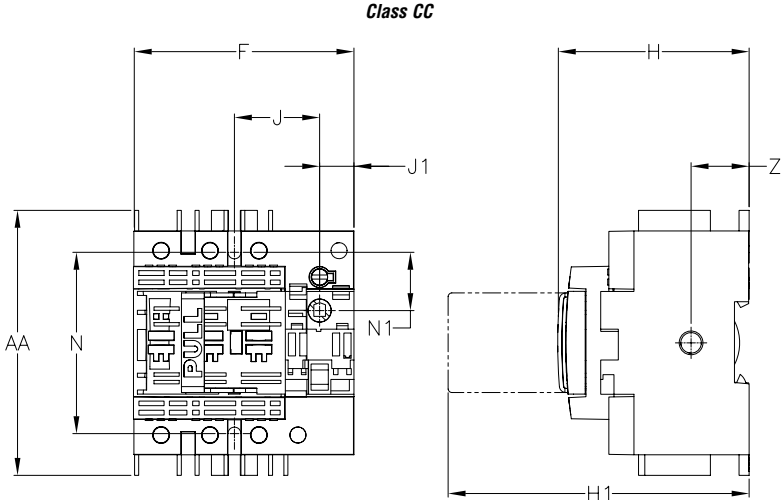

Dimensions										
Switch Body Rating (A)	Unit	Switch Body					Switch Mounting		Connection	
		F	H	H1	J	J1	N	N1	AA	Z
30 Class CC	in	3.78	3.28	5.19	1.47	0.59	3.13	1	4.56	1.12
	mm	96	83.5	132	37.5	15	79.5	25.5	116	28.5
30 Class J	in	4.13	3.89	—	1.47	0.59	3.30	1	4.56	1.12
	mm	105	99	—	37.5	15	84	25.5	116	28.5

Please see our website [www.AutomationDirect.com](http://www.AutomationDirect.com) for complete engineering drawings.

# Accessories Dimensions



## Handles

[inches/mm]

Direct Handles for UL 489 Compact Fusible Disconnect Switches	
26995052	37996012
<p><b>Handle Dimensions</b></p>	<p><b>Handle Dimensions</b></p>

External Handles for UL 489 Compact Fusible Disconnect Switches			
S0 Type			
Handle Dimensions	Direction of Operation	Door Drilling	
S1 Type			
Handle Dimensions	Direction of Operation	Door Drilling	

**Note:** Test position included on certain models only as indicated in the selection tables.

Please see our website [www.AutomationDirect.com](http://www.AutomationDirect.com) for complete engineering drawings.

# Accessories Dimensions




## Shafts for Fusible Disconnect Switches

[inches/mm]

Shafts for Fusible Disconnect Switches									
Shafts for S0 Handle Type	Part Number	Body Switch Rating	Length		Shafts for S2 Handle Type	Part Number	Body Switch Rating	Length	
			in	mm				in	mm
	14050620	30A	7.9	200		14001020	30A to 400A	7.9	200
	14050632		12.6	320		14001032	30A to 200A	12.6	320
	14050640		15.7	400		14001040	30A to 400A	15.7	400
Shafts for S1 Handle Type	Part Number	Switch Body Rating	Length		Shafts for S3 Handle Type	Part Number	Switch Body Rating	Length	
	14010520	30A	7.9	200		14001220	600A	7.9	200
	14010532		12.6	320		14001232		12.6	320
	14010540		15.7	400		14001240		15.7	400

Please see our website [www.AutomationDirect.com](http://www.AutomationDirect.com) for complete engineering drawings.

Shaft Length Minimum Dimensions						
Use standard lengths: - 7.9 in / 200mm      - 12.6 in / 320mm      - 15.7 in / 400mm						
Switch Body Rating (A)	Dimension X		Handle Type	Length		Part Number
	in	mm		in	mm	
30	4.02 - 9.65	102 - 245	S0	7.9	200	14050620
30	4.02 - 14.37	102 - 365	S0	12.6	320	14050632
30	4.02 - 17.52	102 - 445	S0	15.7	400	14050640
30	4.02 - 9.65	102 - 245	S1	7.9	200	14010520
30	4.02 - 14.37	102 - 365	S1	12.6	320	14010532
30	4.02 - 17.52	102 - 445	S1	15.7	400	14010540
30 - 100	5.3 - 9.06	135 - 230	S2, S3	7.9	200	14001020
200	5.7 - 9.06	145 - 230	S2, S3	7.9	200	14001020
400	7.87 - 10.24	200 - 260	S2, S3	7.9	200	14001020
30 - 100	5.3 - 13.78	135 - 350	S2, S3	12.6	320	14001032
200	5.7 - 13.78	145 - 350	S2, S3	12.6	320	14001032
400	7.87 - 14.96	200 - 380	S2, S3	12.6	320	14001032
30 - 100	5.3 - 16.93	135 - 430	S2, S3	15.7	400	14001040
200	5.7 - 16.93	145 - 430	S2, S3	15.7	400	14001040
400	7.87 - 18.1	200 - 460	S2, S3	15.7	400	14001040
600 - 800	10.63 - 11.97	270 - 304	S3	7.9	200	14001220
600 - 800	10.63 - 16.69	270 - 424	S3	12.6	320	14001232
600 - 800	10.63 - 19.84	270 - 504	S3	15.7	400	14001240





# Accessories Dimensions




## Auxiliary Contacts and Additional Poles




[inches/mm]

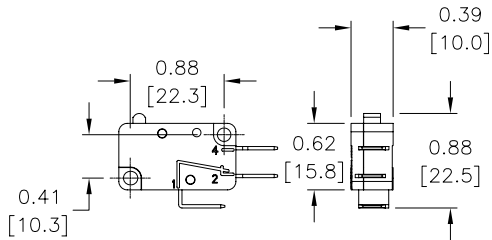




**27990021**  
**27990022**  
**27990121**




**3999U041**  
**3999U042**

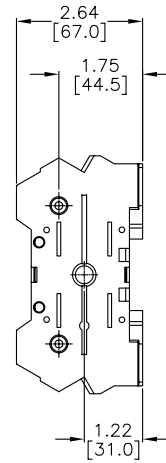





**22990001-UL**  
**22990011-UL**  
**39990701**  
**39990702**



**22011003**  
**22011006**  
**22001010-UL**  
**22005011**  
**22009011**



**22001000-UL**  
**22001001-UL**  
**22001002-UL**  
**22001003-UL**  
**22001004-UL**

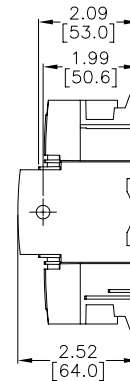

Please see our website [www.AutomationDirect.com](http://www.AutomationDirect.com) for complete engineering drawings.



# Disconnect Switches

## Introduction

### UL®/CSA® Standards for Disconnect Switches

#### UL 98 – Enclosed and Deadfront Switches (CSA C22.2 No. 4)

These requirements cover enclosed or deadfront switches, with or without provision for fuses, at 600V or less. These products are used as disconnecting means without restrictions; they are heavy-duty products requiring 2 inches (50mm) minimum of creepage distance between phases, which gives maximum safety for users and installation. The short-circuit withstand of these products goes up to 200kA.

#### UL 489 – Molded Case Switches (CSA C22.22 No. 5)

These requirements cover molded case circuit breakers, molded case switches and fused molded case switches, rated at 600V or less and 6000A or less.

### NFPA® 79 Electrical Standard for Industrial Machinery



The following types of machines are identified as industrial machinery:

- Metalworking machine tools, including machines that cut or form metal
- Plastics machinery
- Wood machinery, including woodworking, laminating and sawmill machines
- Assembly machines
- Material handling machines, including industrial robots and transfer machines
- Inspection and testing machines, including coordinate measuring and in-process gauging machines

### UL® Standards for Electrical Machinery

#### UL 508 – Industrial Control Equipment (CSA C22.2 No. 14)

These requirements cover manual, magnetic and solidstate starters and controllers, overload relays, pushbuttons, selector switches and control lights. These products are smaller, requiring only a creepage distance between phases of 0.50 inch (12.7 mm). Their use as a disconnecting means is limited to local disconnection of motors. These products can be used as a disconnect means only when they have been additionally tested “suitable as motor disconnect.” This additional testing ensures that the switch has a proper closing capacity on a short circuit. UL 508 devices **cannot** be used as main disconnect of an electrical panel, e.g., at the entrance of control panels. A manual motor controller marked “suitable as motor disconnect” shall be installed only on the load side of the branch circuit protective device [UL 508A 30.3.3 and NEC 430.109 (6)].

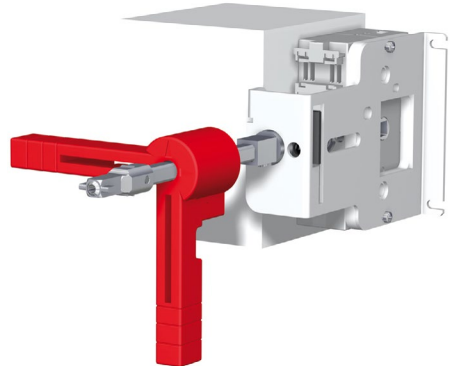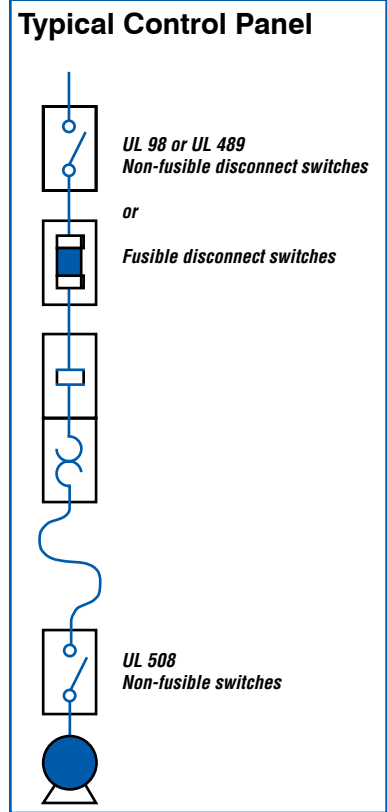

#### Meeting the requirements of UL508A and NFPA79

**The disconnect shall be operable independent of the door position.**

The disconnect must be operable, by qualified persons, independent of the door position without the use of accessory tools or devices.

**Note:** NFPA 79; Paragraph 5.3.3.1 (5).

An operating mechanism for the disconnecting means shall be operable independent of the door position without the use of accessory tools or devices.

**Note:** UL 508A; Paragraph 66.6.3 c.