

PZ12 Series Linear Potentiometers With Cylindrical Case



Features

- Half-inch-diameter cylindrical housing
- Multiple mounting options (brackets, rod eyes or flange) enhance versatility for a wide range of applications
- Designed for easy installation thanks to an absence of electrical signal variation in output
- Ideal for applications such as wood and glass working, finishing machinery, and car test benches
- All potentiometers are individually tested at the manufacturer, and an individualized Linearity Error Chart is included with each unit

PZ12 Series Linear Potentiometers Selection Chart


Part Number	Price	Drawing Link	Useful Electrical Stroke (CEU) mm [in]	Theoretical Electrical Stroke (CET) mm [in]	Resistance (CET)	Mechanical Stroke (CM) mm [in]	Case Length (A) mm [in]	Recommended Distance Between Brackets (B) mm [in]	Minimum Distance Between Rod Eyes (C) mm [in]
PZ12-F-xxxx-L Flange Mount Models									
PZ12-F-0025-L	\$146.00	PDF	25 [0.98]	26 [1.02]	1KΩ	30 [1.18]	74.5 [2.93]	-	-
PZ12-F-0050-L	\$155.00	PDF	50 [1.97]	51 [2.01]	2KΩ	55 [2.17]	99.5 [3.92]	-	-
PZ12-F-0075-L	\$159.00	PDF	75 [2.95]	76 [2.99]	3KΩ	80 [3.15]	124.5 [4.90]	-	-
PZ12-F-0100-L	\$164.00	PDF	100 [3.94]	101 [3.98]	4KΩ	105 [4.13]	149.5 [5.89]	-	-
PZ12-F-0200-L	\$178.00	PDF	200 [7.87]	201 [7.91]	8KΩ	205 [8.07]	249.5 [9.82]	-	-
PZ12-A-xxxx-L Rod Eyes Mount Models									
PZ12-A-0025-L	\$200.00	PDF	25 [0.98]	26 [1.02]	1KΩ	30 [1.18]	102 [4.02]	-	153 [6.02]
PZ12-A-0050-L	\$260.00	PDF	50 [1.97]	51 [2.01]	2KΩ	55 [2.17]	127 [5.00]	-	178 [7.01]
PZ12-A-0075-L	\$265.00	PDF	75 [2.95]	76 [2.99]	3KΩ	80 [3.15]	152 [5.98]	-	203 [7.99]
PZ12-A-0100-L	\$270.00	PDF	100 [3.94]	101 [3.98]	4KΩ	105 [4.13]	177 [6.97]	-	228 [8.98]
PZ12-A-0200-L	\$283.00	PDF	200 [7.87]	201 [7.91]	8KΩ	205 [8.07]	277 [10.91]	-	328 [12.91]
PZ12-S-xxxx-L Clamp Brackets Mount Models									
PZ12-S-0025-L	\$155.00	PDF	25 [0.98]	26 [1.02]	1KΩ	30 [1.18]	74.5 [2.93]	42 [1.65]	-
PZ12-S-0050-L	\$170.00	PDF	50 [1.97]	51 [2.01]	2KΩ	55 [2.17]	99.5 [3.92]	67 [2.64]	-
PZ12-S-0075-L	\$175.00	PDF	75 [2.95]	76 [2.99]	3KΩ	80 [3.15]	124.5 [4.90]	92 [3.62]	-
PZ12-S-0100-L	\$180.00	PDF	100 [3.94]	101 [3.98]	4KΩ	105 [4.13]	149.5 [5.89]	117 [4.61]	-
PZ12-S-0200-L	\$194.00	PDF	200 [7.87]	201 [7.91]	8KΩ	205 [8.07]	249.5 [9.82]	217 [8.54]	-

PZ12 Series Linear Potentiometers With Cylindrical Case

PZ12 Series Linear Potentiometers Specifications					
Model PZ12-x-xxxx-L	0025	0050	0075	0100	0200
Independent Linearity (Within CEU)	± 0.2%	± 0.1%	± 0.1%	± 0.1%	± 0.05%
Resolution	Infinite				
Repeatability	-				
Electrical Connections	PVC, 1m [3.28 ft] 3-wire axial cable, 24AWG (0.25 mm ²)				
Displacement Speed	Standard ≤ 10 m/s [32.81 ft/s]				
Protection Level	IP60				
Life	> 25x10 ⁶ strokes or > 100x10 ⁶ maneuvers, whichever is less (within CEU)				
Displacement Force	≤ 0.5 N				
Vibrations	5-2000 Hz: Amax=0.75 mm [0.03 in], amax=20g				
Shock	50g, 11ms				
Acceleration	-				
Tolerance on Resistance	±20%				
Recommended Cursor Current	< 0.1 μA				
Maximum Cursor Current	10mA				
Maximum Applicable Voltage	20V	40V	60V	60V	60V
Electrical Isolation	>100MΩ at 500V~, 1bar, 2s				
Dielectric Strength	< 100μA at 500V~, 50Hz, 2s, 1bar				
Dissipation at 40 °C [104 °F] (0W at 120 °C [248 °F])	0.5 W	1W	1.5 W	2W	3W
Thermal Coefficient of Resistance	-200 to +200 ppm/°C				
Actual Temperature Coefficient of Output Voltage	≤ 1.5 ppm/°C				
Working Temperature	-30 to +100°C [-22 to +212°F]				
Storage Temperature	-50 to +120°C [-58 to 248°F]				
Case Material	Anodized aluminum, Nylon 66				
Shaft Material	Stainless steel AISI 303				
Mounting	Brackets, self-aligning rod eyes, or flange				

PZ12 Series Linear Potentiometers With Cylindrical Case

Electrical Connections

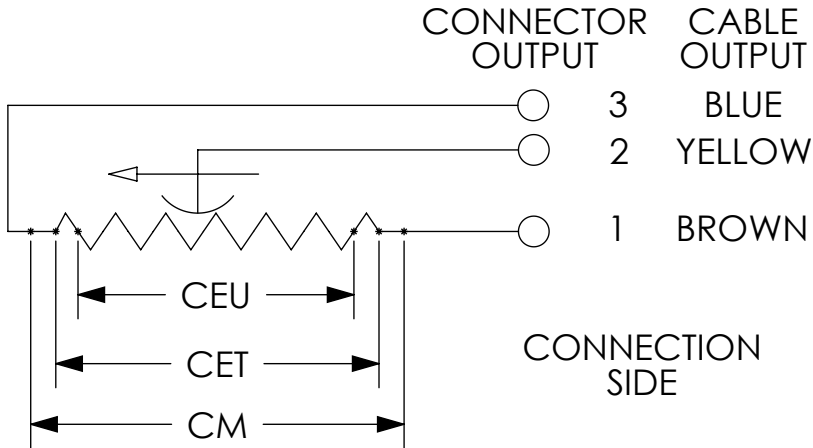

When choosing a transducer, it is important to remember that three different strokes exist:

- Mechanical Stroke (CM): The actual shift that the transducer's cursor (wiper) is able to make.
- Useful Electrical Stroke (CEU): The part of the mechanical stroke in which transducer linearity is guaranteed.
- Theoretical Electrical Stroke (CET): Stroke expressed in mm or angular degrees between the electrical zero ($V_{out}=0$) and the electrical limit switch ($V_{out}=V_s$), which physically is equal to the distance between the silver pitches at the ends of the resistive track.


Therefore, when designing an application, you should choose a transducer with a useful electrical stroke that is equal to or greater than the maximum displacement carried out by the moving part.

Linear Potentiometer Accessories

Connectors For Gefran Linear Potentiometers				
Part Number	Price	Drawing Link	Description	Number of Poles
CON006-1KJ	\$7.50	PDF	Gefran field wireable connector, 18mm DIN 43650 Form A, 90-degree cable entry, 4-pole. For use with Gefran LT, PK and WPG linear position sensors.	4
CON008-1KJ	\$7.50	PDF	Gefran field wireable connector, 9.4mm DIN 43650 Form C, 90-degree cable entry, 4-pole. For use with Gefran PC series potentiometers.	4



Mounting Brackets and Accessories For Gefran Linear Potentiometers		
Part Number	Price	Description
PKIT009-1KJ	\$11.00	Gefran mounting brackets, for use with Gefran LT Series potentiometers
PKIT015-1KJ	\$20.00	Gefran rod eye joint accessory, for use with Gefran LT Series potentiometers
PKIT059-1KJ	\$11.00	Gefran mounting brackets, for use with 100 to 900mm Gefran PK Series potentiometers
PKIT061-1KJ	\$14.00	Gefran mounting brackets, for use with 1000 to 2000mm Gefran PK Series potentiometers
STA074-1KJ	\$5.00	Gefran mounting brackets, for use with Gefran PZ12-S Series potentiometers




PKIT009-1KJ




PKIT015-1KJ



PKIT059-1KJ



PKIT061-1KJ



STA074-1KJ