

# 3P Series Molded Case Circuit Breakers Overview

## Overview

Designed to provide branch and feeder circuit protection in industrial control panels, this line of Molded Case Circuit Breakers supplies protection against overload in conductors and short circuit in connected equipment such as motors. They are UL listed for installation in UL 508 control panels. Their small size, in relation to standard circuit breakers or other comparable devices, saves panel space. Four frame sizes and all standard accessories are available.

## Listings

- UL 489 MCCB, File: E7819
- Field-installed accessories: UL file E64983
- CSA 22.2 No.5, File: 43556
- IEC 157-1
- NEMA Standards Pub. No. AB1-1993

## Features

- UL489 listed performance for branch circuit overcurrent protection and disconnecting means
- Patented contact conductor designs featuring high-speed “blow-open” action, providing superior performance when high level fault currents produce extra-ordinary electromechanical forces
- Advanced arc extinguishing technology
- Toggle handle provides three positions (on/off/tripped) along with visual indicators
- Manufactured in ISO 9000 certified facilities
- HACR (heating, air conditioning and refrigeration) rated
- G-Frame and F-Frame breakers are suitable for reverse feed
- K-Frame and L-Frame breakers include 3-pole adjustable magnetic trip.



Manufactured by Eaton Corporation


**Note:** These parts available for sale to North American locations only.

Molded Case Circuit Breakers Technical Specifications										
Circuit Breaker Type	Ampere Rating at 40°C	No. Poles	Volts		Type of Trip*	Federal Specification W-C-375b	UL 489 Interrupting Ratings (rms Symmetrical Amperes) (kA)			
			AC	DC			Volts AC (50/60 Hz)			Volts DC
							240	480	600	
<b>G-Frame</b>	15 - 100	3	480	250	N.I.T.U	13b	65	22	—	10
<b>F-Frame</b>	60 - 225	3	600	250	N.I.T.U	22a	65	35	18	10
<b>K-Frame</b>	250 - 400	3	600	250	I.T.U	23a	65	35	25	10
<b>L-Frame</b>	400 - 600	3	600	250	I.T.U	23a	65	35	25	22

\*Note: N.I.T.U denotes non-interchangeable trip unit. I.T.U denotes interchangeable trip unit.

\*\*Note: For DC or 1-phase AC applications, use the two outside poles of the 3-pole circuit breaker

## Molded Case Circuit Breakers Part Numbering System

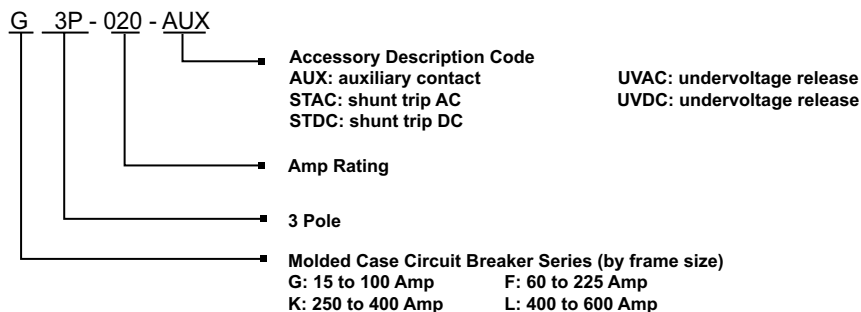


# 3P Series Molded Case Circuit Breakers 60 - 225 Amp F-Frame



F3P-200



FHMVD12B



F1S03C



3TA150F6K



3TA225FD

F-Frame circuit breakers are available as a single unit, or with accessories pre-installed only. Accessories are not field installable on this frame size.

This frame size is suitable for reverse feed use. All breakers include base mounting hardware for panel mount applications.

F-Frame Series Three Pole Molded Case Circuit Breakers						
Part Number	Price	Description	Pre-Installed Accessories*	Ampere Rating	Voltage	Interrupt Capacity
F3P-060	\$572.00	Molded case circuit breaker with non-adjustable thermal magnetic trip; line and load lug terminals included.	None	60	240VAC 480VAC 600VAC 250VDC**	65kA 35kA 18kA 10kA
F3P-070	\$612.25		None	70		
F3P-080	\$612.25		None	80		
F3P-090	\$577.50		None	90		
F3P-100	\$612.25		None	100		
F3P-125	\$612.25		None	125		
F3P-150	\$612.25	Molded case circuit breaker with non-adjustable thermal magnetic trip; line and load lug terminals included.	None	150		
F3P-150-AUX	\$673.00		auxiliary contact, SPDT			
F3P-150-STAC	\$673.00		120 VAC shunt trip			
F3P-150-STDC	\$673.00		24 VDC shunt trip			
F3P-150-UVAC	\$673.00		120 VAC undervoltage release			
F3P-175	\$612.25	Molded case circuit breaker with non-adjustable thermal magnetic trip; line and load lug terminals included.	None	175		
F3P-200	\$612.25	Molded case circuit breaker with non-adjustable thermal magnetic trip; line and load lug terminals included.	None	200		
F3P-200-AUX	\$673.00		auxiliary contact, SPDT			
F3P-200-STAC	\$673.00		120 VAC shunt trip			
F3P-200-STDC	\$673.00		24 VDC shunt trip			
F3P-200-UVAC	\$673.00		120 VAC undervoltage release			
F3P-225	\$612.25	Molded case circuit breaker with non-adjustable thermal magnetic trip; line and load lug terminals included.	None	225		

\*Note: Available accessories are pre-installed on G-Frame and F-Frame Molded Case Circuit Breakers. They are not field installable or interchangeable.

\*\*Note: For DC or 1-phase AC applications, use the two outside poles of the 3-pole circuit breaker

F-Frame Accessory Selection Guide			
Part Number	Price	Description	
FHMVD12B	\$73.25	NEMA 1/12 rotary handle for F-frame. Position indicating. Lock-off feature. Shaft length: 12"	
HM1R12X	\$104.50	NEMA 4/4X rotary handle for F-frame. Position indicating. Lock-off feature. Shaft length: 12"	
HM1R24X	\$118.25	NEMA 4/4X rotary handle for F-frame. Position indicating. Lock-off feature. Shaft length: 24"	
F1S03C	\$320.25	NEMA 1/12 flex shaft cable operator for F-frame. Flange mountable. Lockable. Cable length: 3'	
F1S06C	\$347.25	NEMA 1/12 flex shaft cable operator for F-frame. Flange mountable. Lockable. Cable length: 6'	
3TA150F6K	\$52.00	Multi-wire connector to allow 6 wires to be connected to the F-frame. UL for copper only. 14-6 AWG. Package of 3	
3TA225FD	\$77.25	Replacement lug kit for F-frame. Package of 3	


F-Frame Electrical Ratings <sup>1,2</sup>					
	Max Volts	Frequency	Max Amperes	Dielectric Withstand Voltage	Notes
F-Frame Auxiliary Switch	125 VAC <sup>3</sup>	50/60 Hz	1	2500	1. Endurance: 5000 electrical operations plus 4000 mechanical operations. 2. Pigtail wire size: 18 AWG (0.82 mm <sup>2</sup> ) 3. Use in electronic circuit of 100 micro-amperes and 15 VDC minimum. 4. Non-inductive load
	600 VAC	50/60 Hz	6		
	125 VDC	DC	0.50 <sup>4</sup>		
	250 VDC	DC	0.25 <sup>4</sup>		

F-Frame Shunt Trip	Supply Voltage	Min Operating Voltage	VA
	120 VAC	36 VAC	570
	24 VDC	9 VDC	400


F-Frame Undervoltage Release Mechanism	Supply Voltage	Dropout Voltage		Pickup Voltage	VA
		Min	Max	Maximum	
	120 VAC	44.5 VAC	77.0 VAC	93.5 VAC	1.5

AWG Wire Range Specifications				
Circuit Breaker	Ampere Rating	Wire Type	AWG Wire Range	Metric Wire Range mm <sup>2</sup>
F-Frame	60 - 100	Cu/Al	14 - 1/0	2.5 - 50
	125 - 225		4 - 4/0	25 - 95


# 3P Series Molded Case Circuit Breakers 60 Amp F-Frame

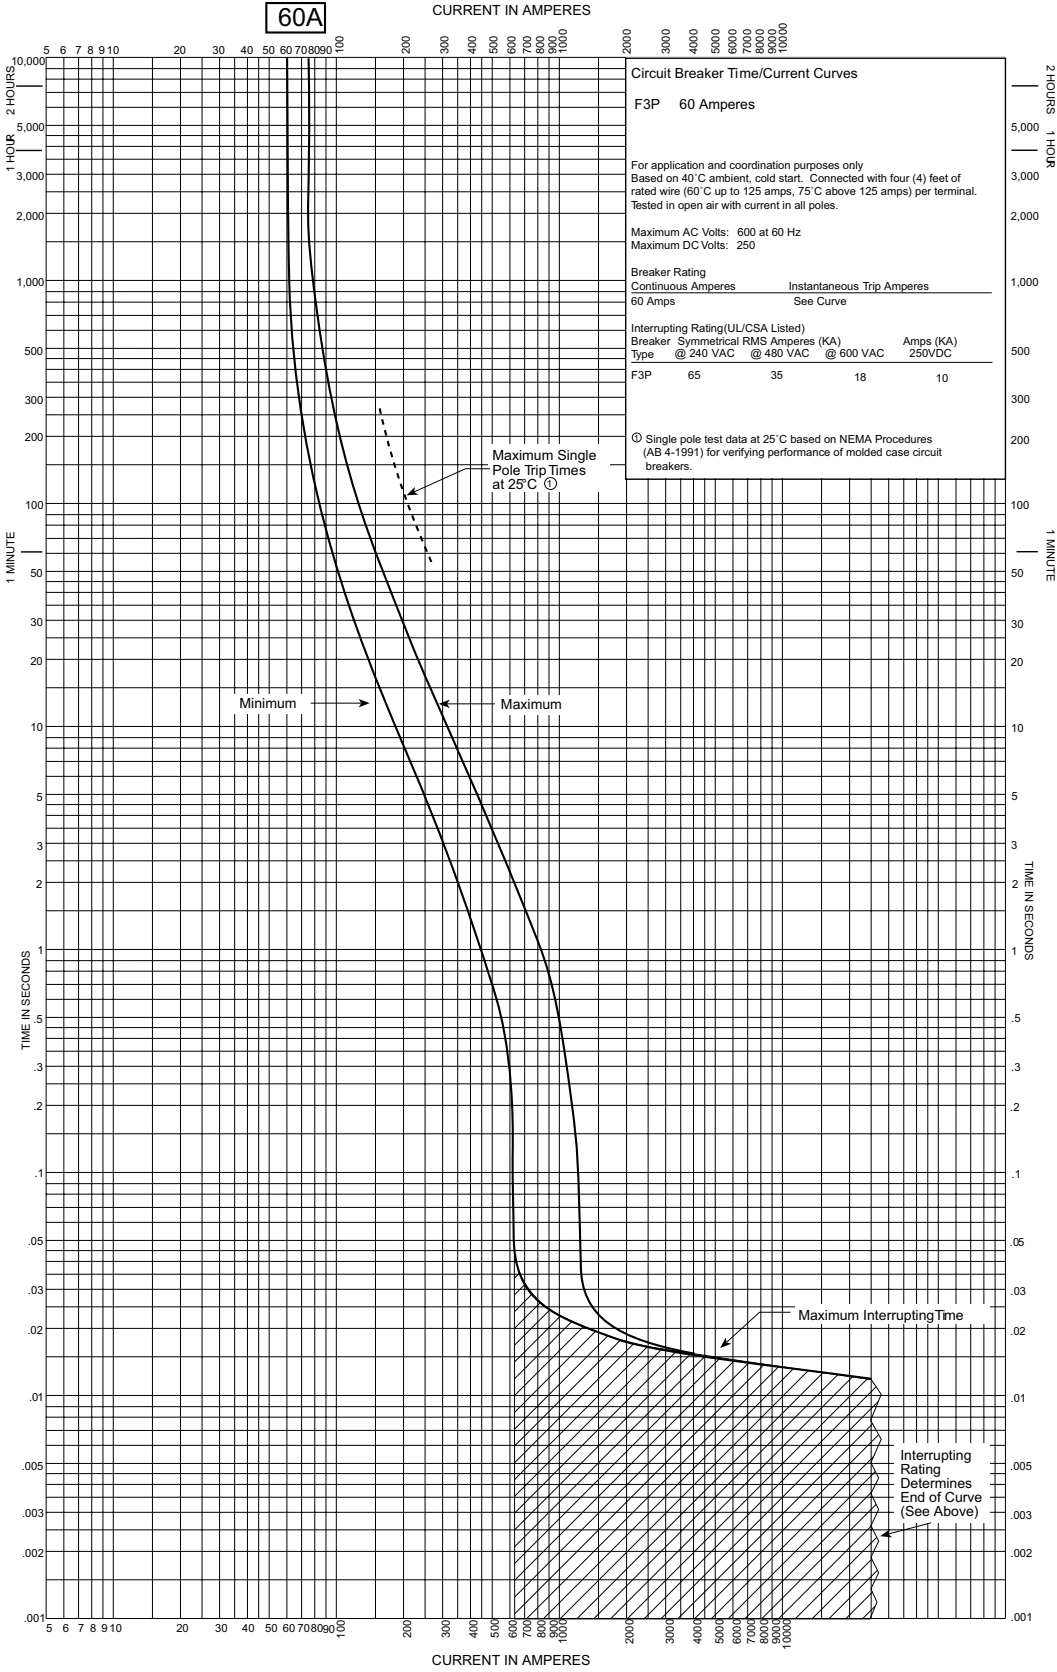


# 3P Series Molded Case Circuit Breakers 70 Amp F-Frame

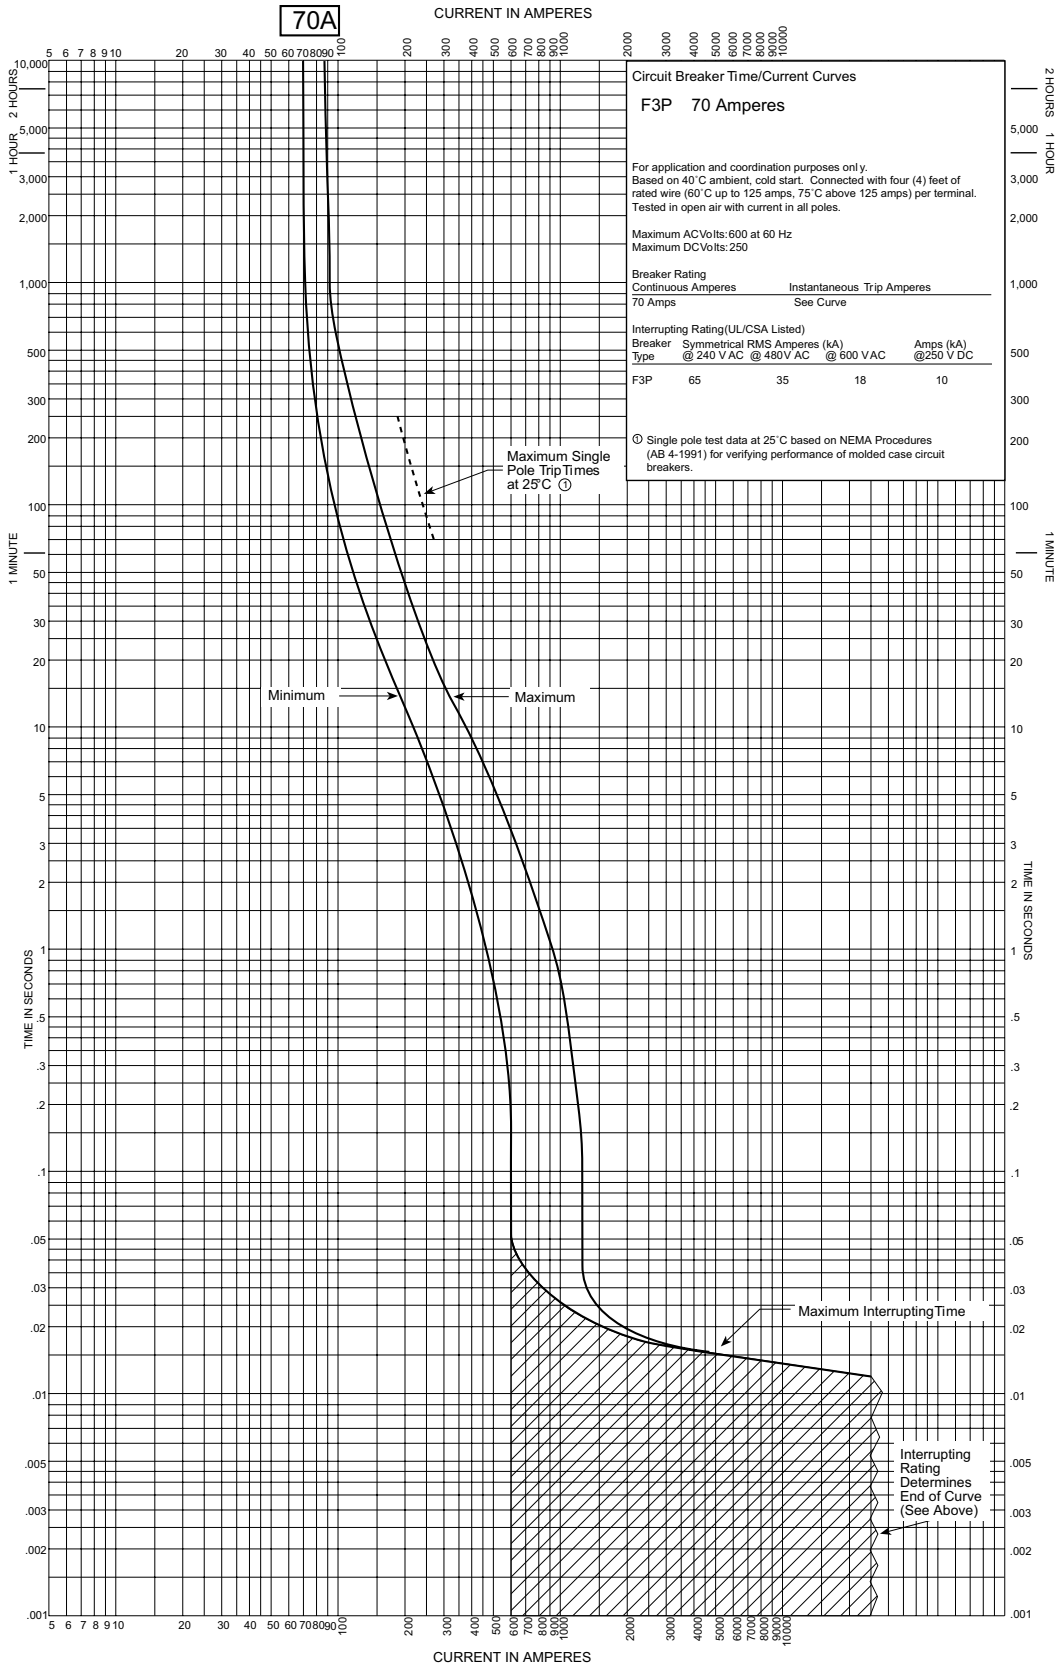


# 3P Series Molded Case Circuit Breakers 80 Amp F-Frame

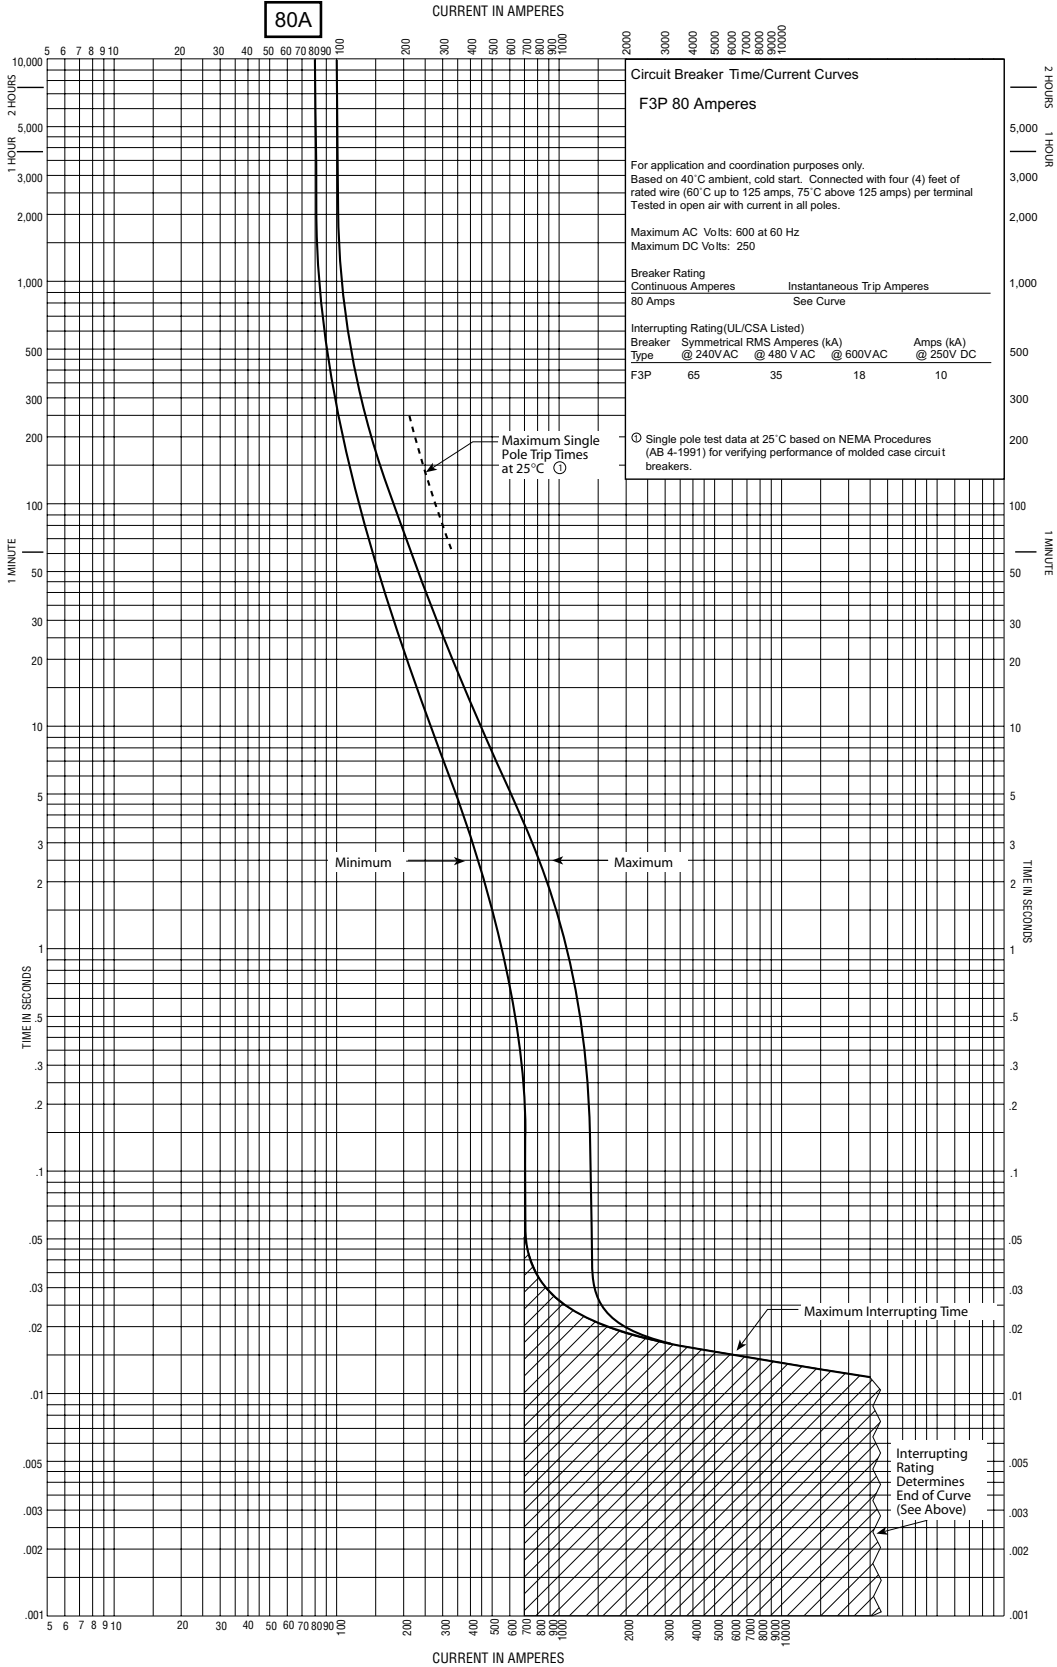


# 3P Series Molded Case Circuit Breakers 90 Amp F-Frame

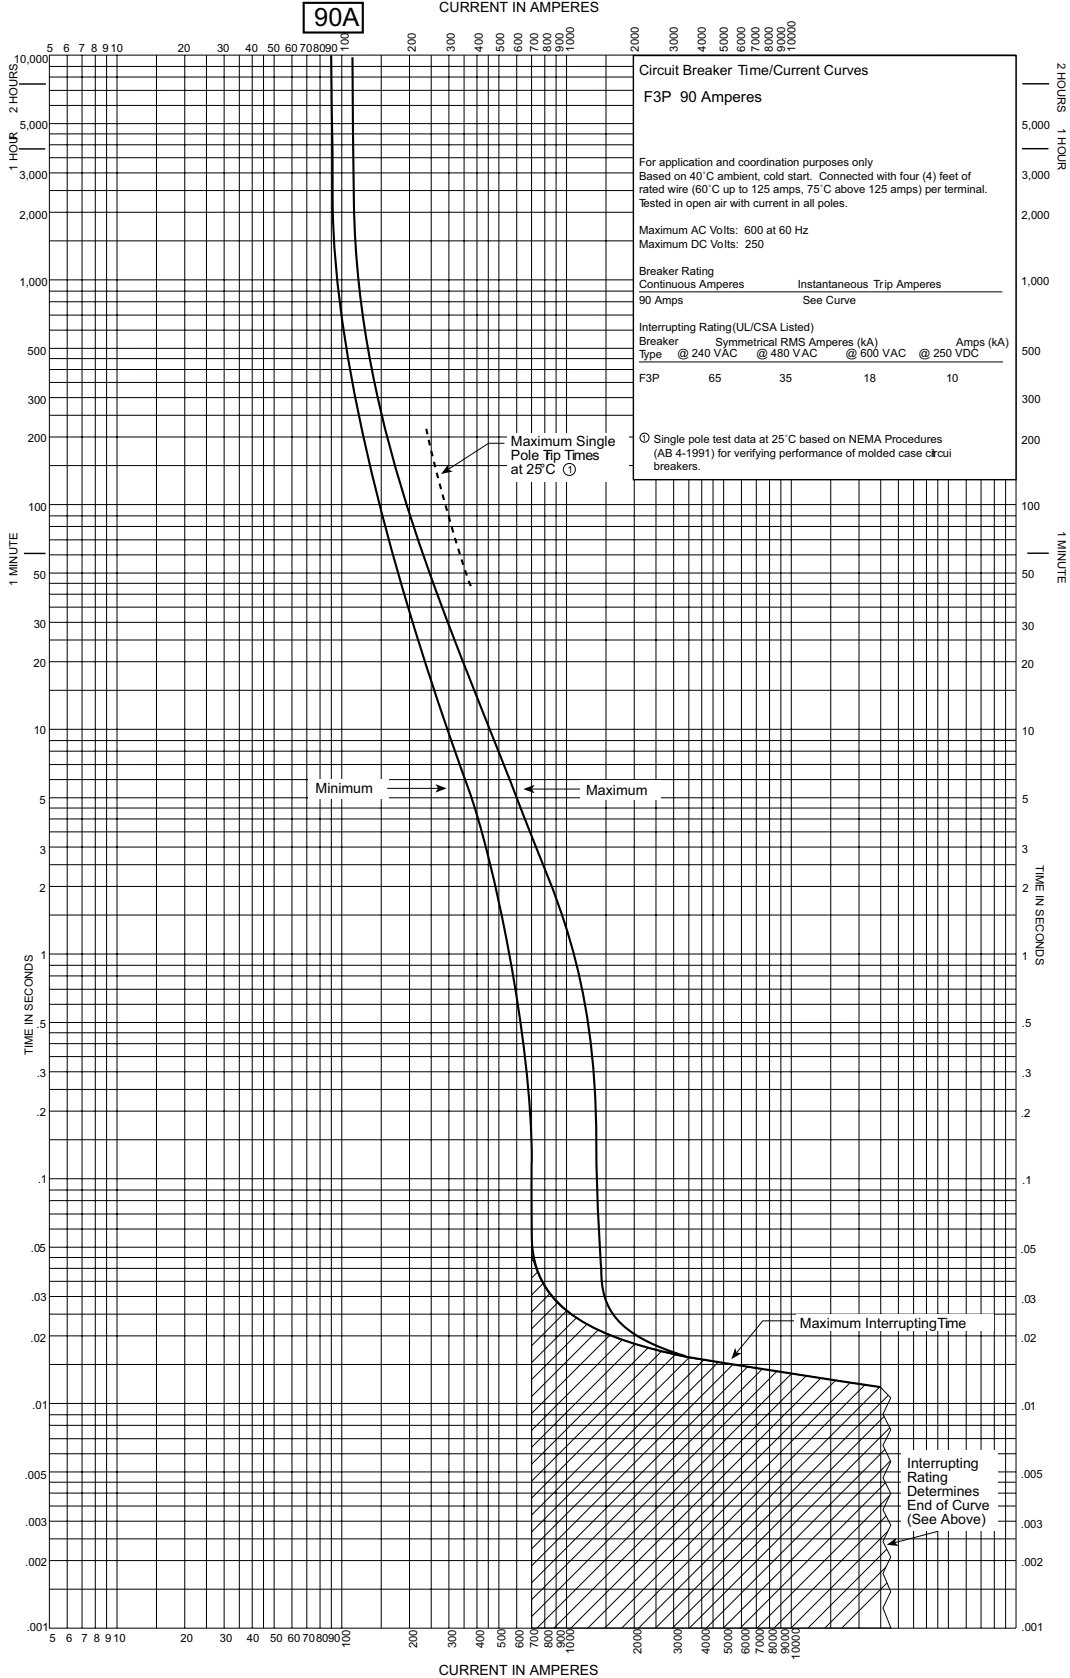

# 3P Series Molded Case Circuit Breakers 100 Amp F-Frame

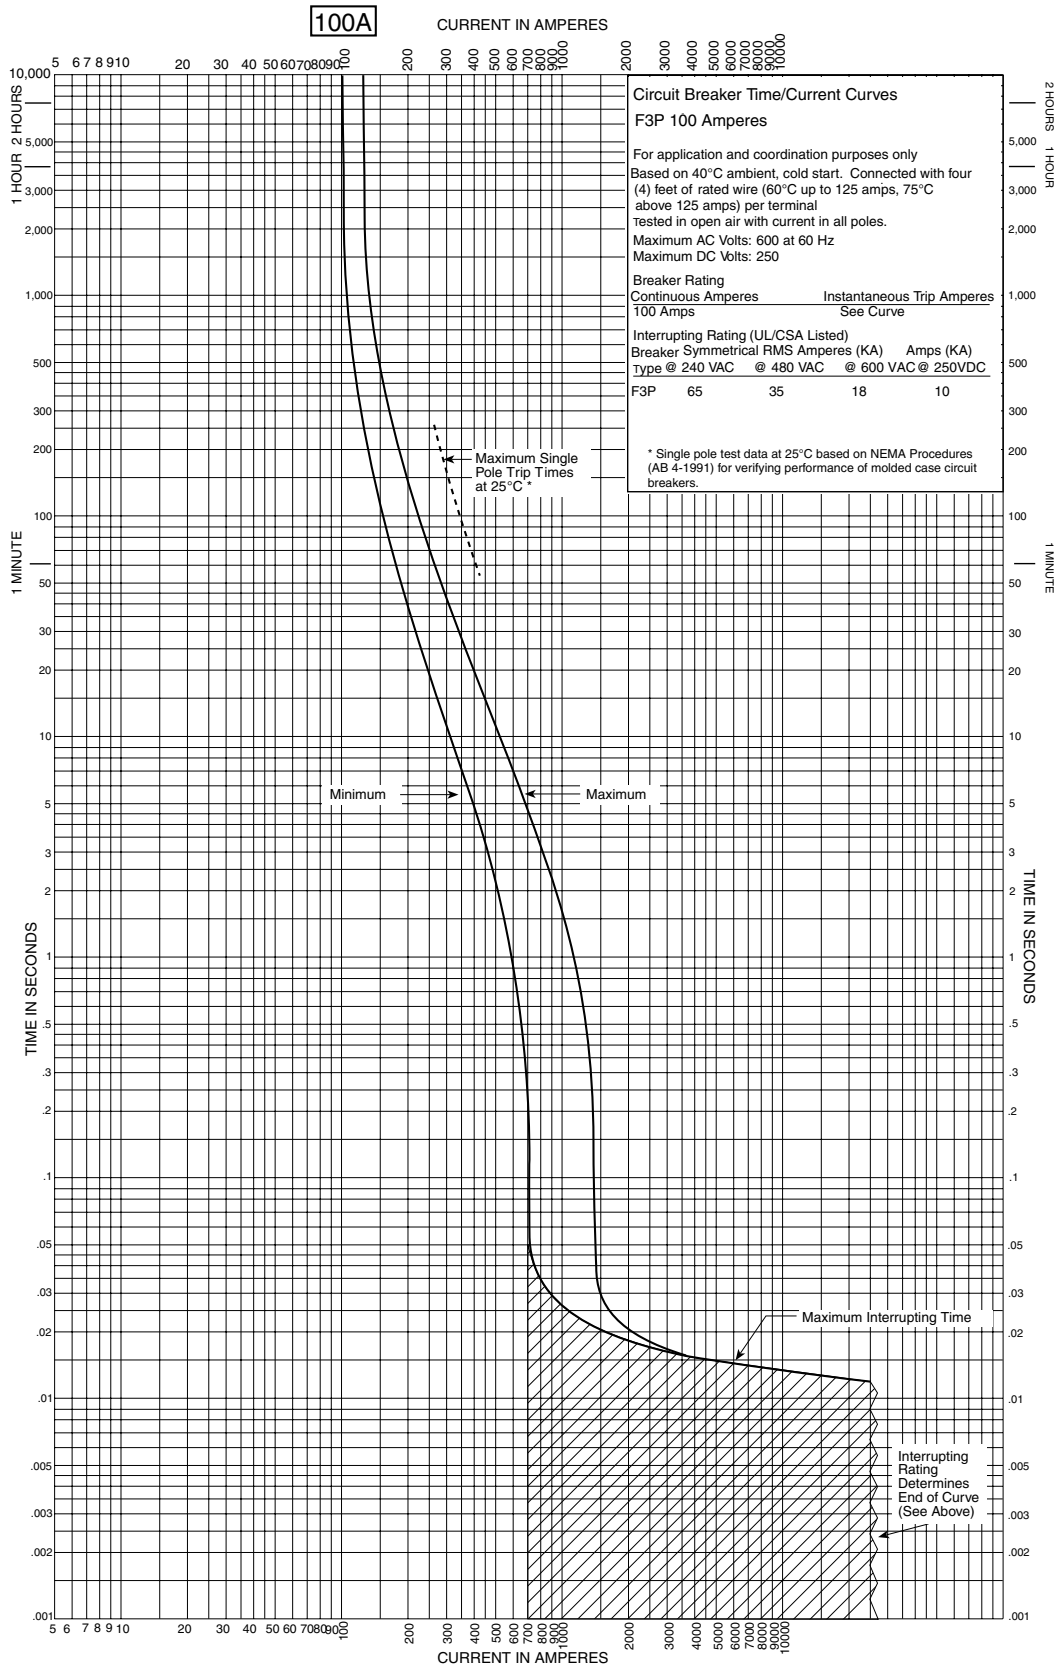


# 3P Series Molded Case Circuit Breakers 125 Amp F-Frame

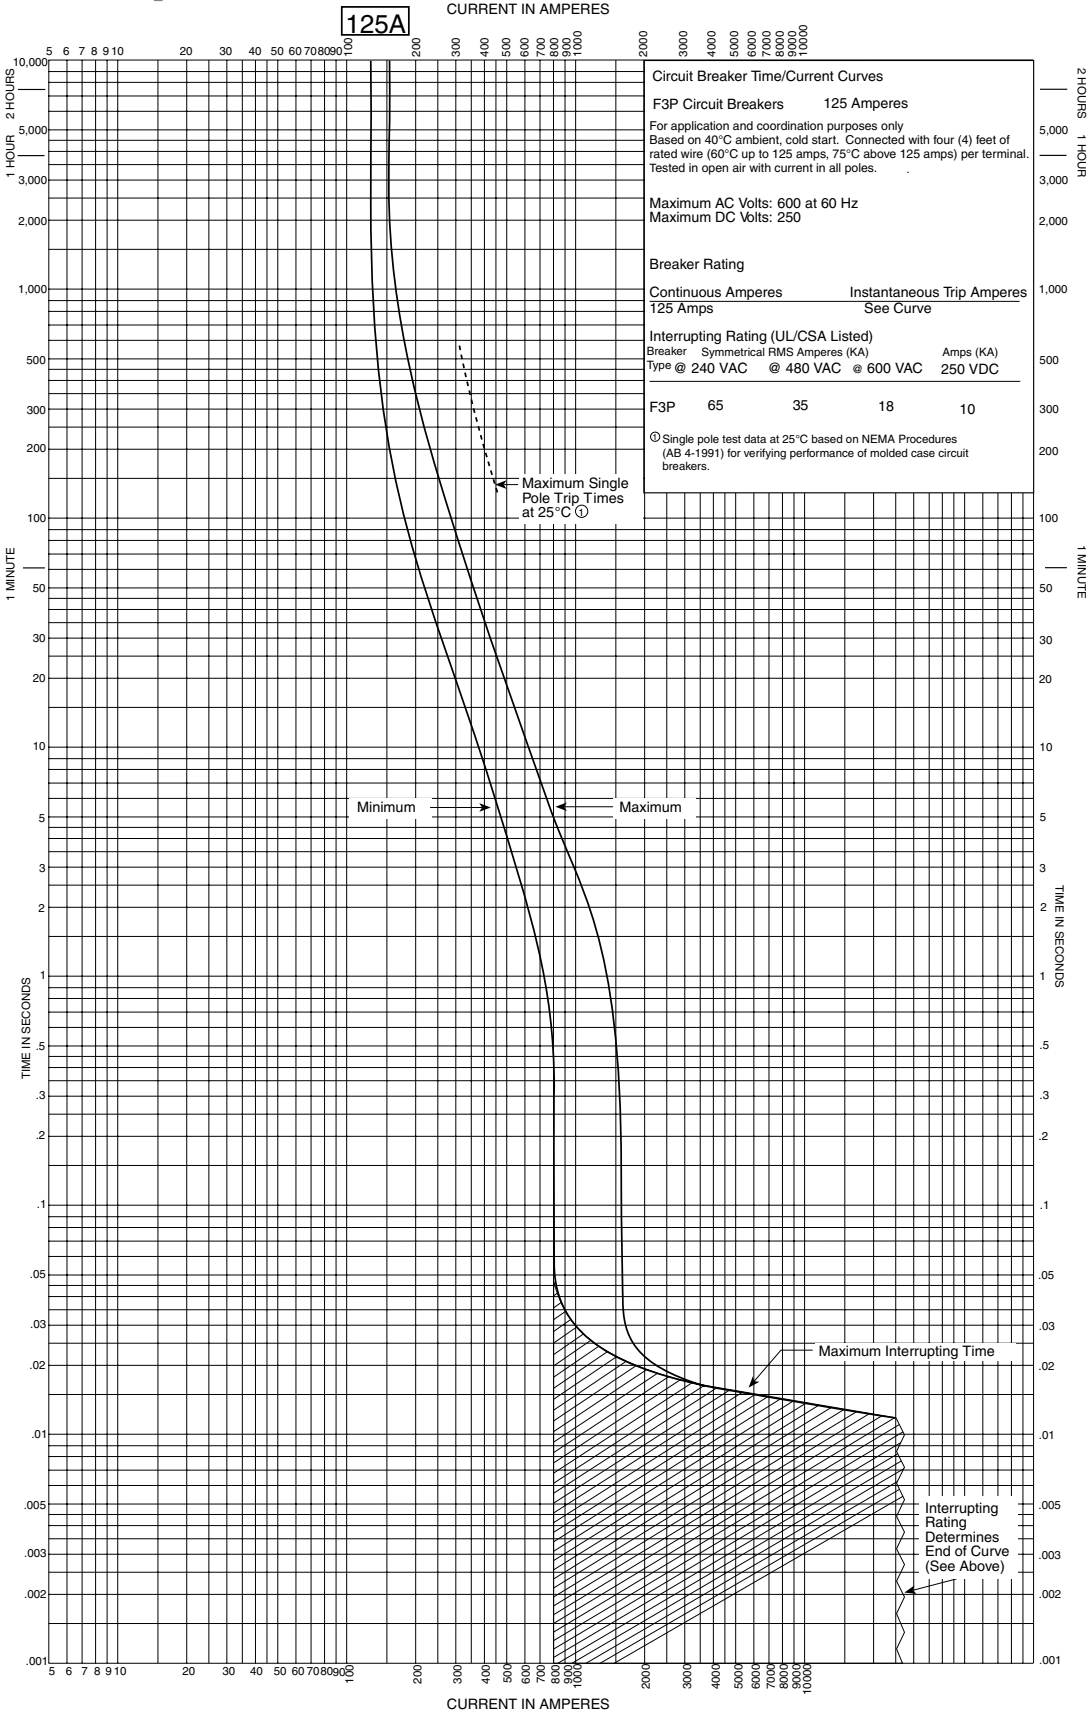




# 3P Series Molded Case Circuit Breakers

## 150 Amp F-Frame

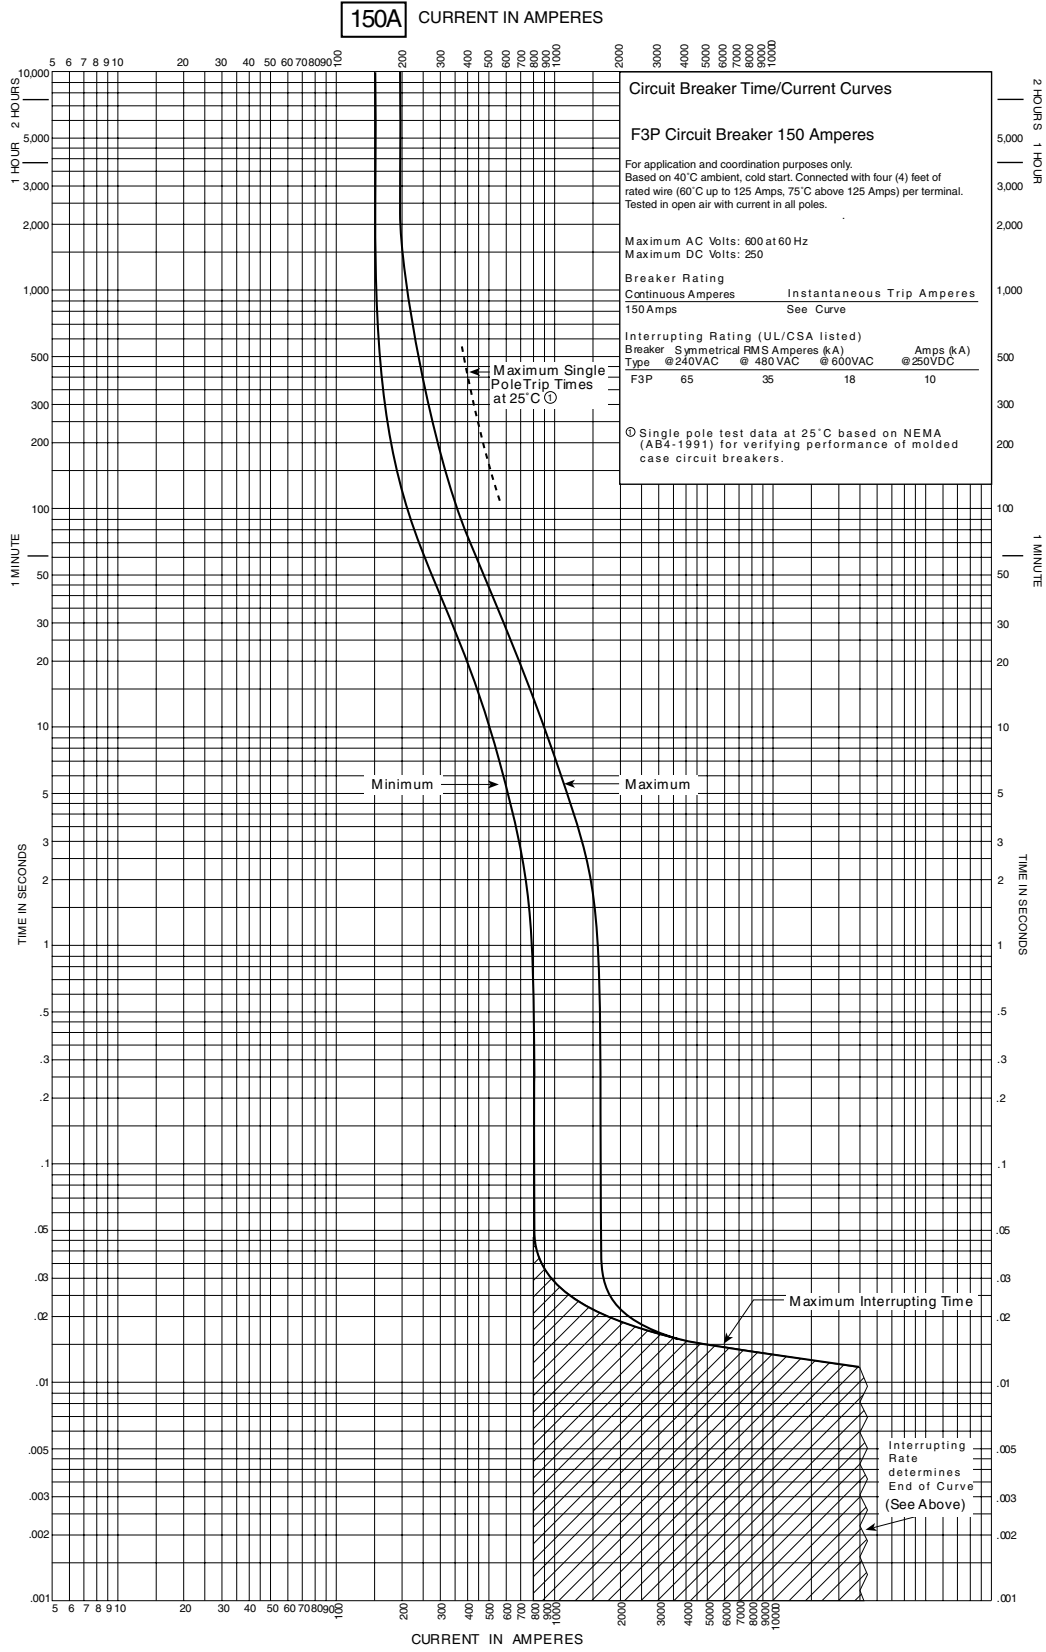

# 3P Series Molded Case Circuit Breakers


## 175 - 225 Amp F-Frame

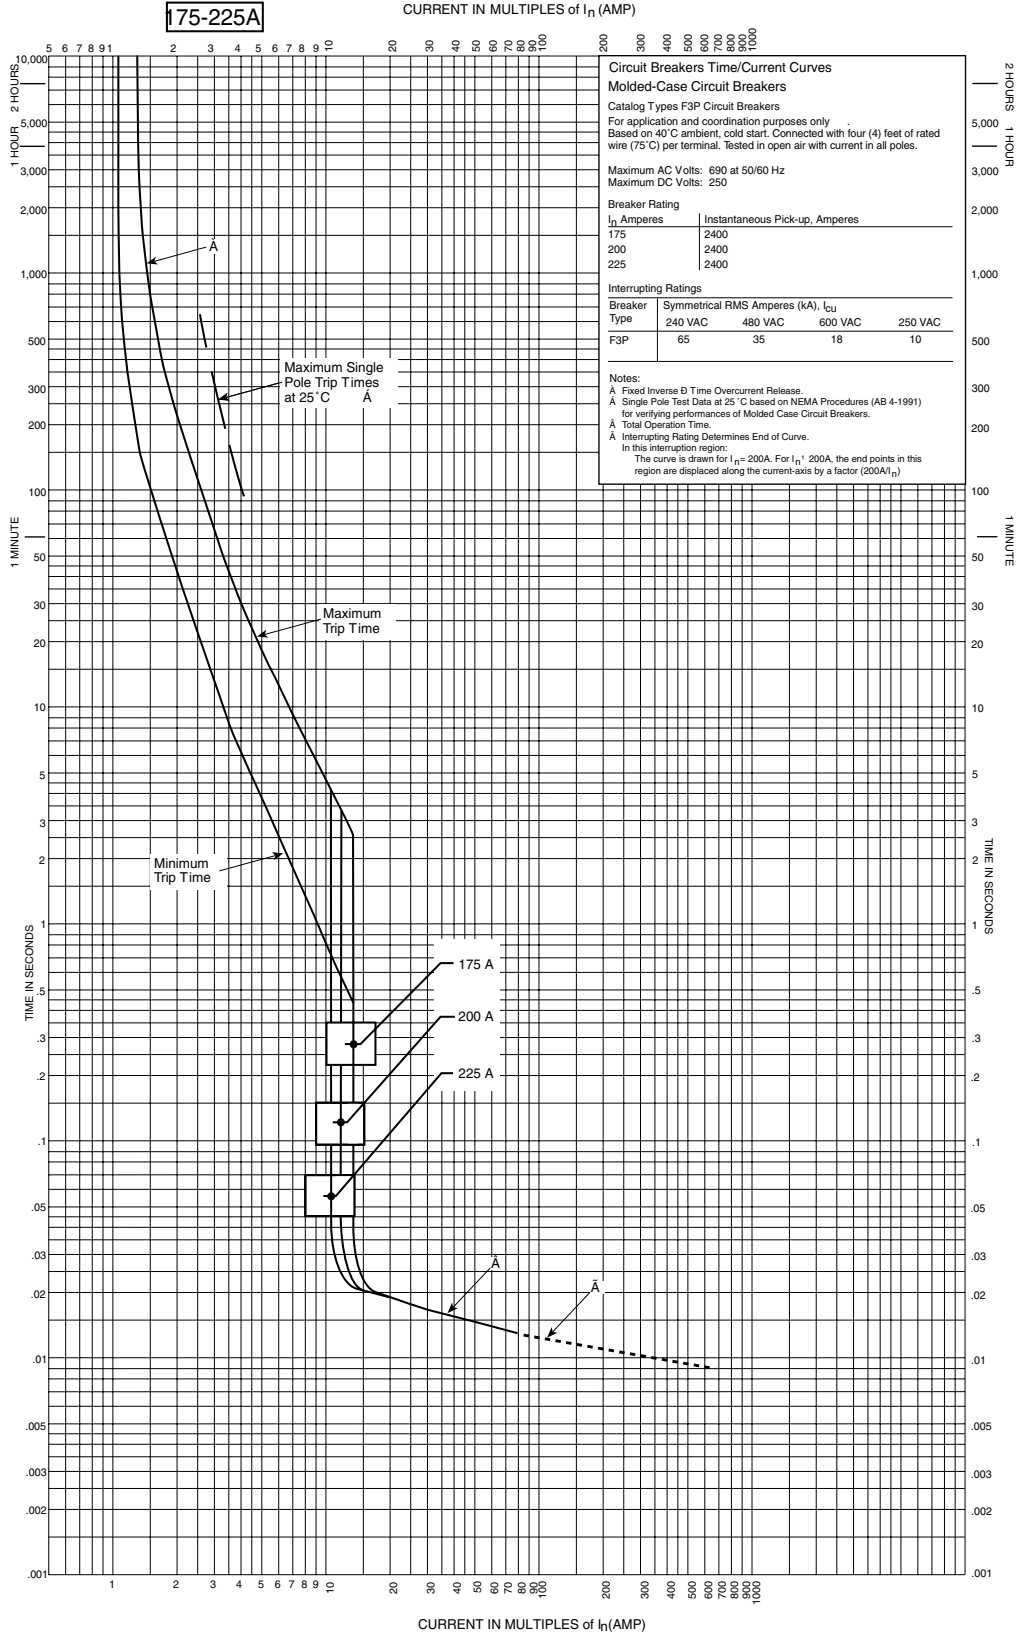

# 3P Series Molded Case Circuit Breakers – Dimensions


## 15 - 100 Amp G-Frame

inches(mm)

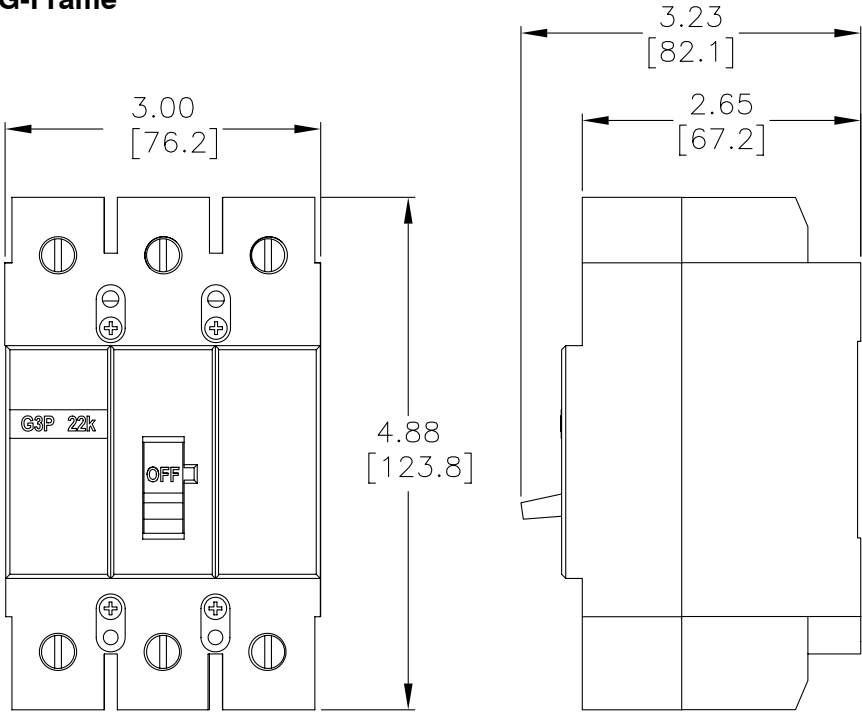

## 60 - 225 Amp F-Frame

inches(mm)

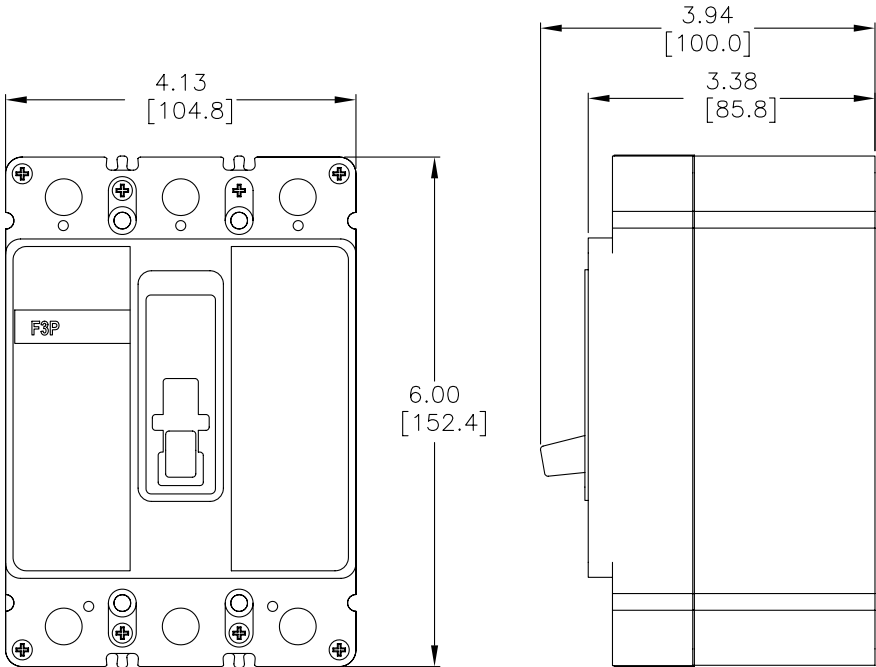

# 3P Series Molded Case Circuit Breakers – Accessories

## Field Mountable Accessories


### Rotary Handle

A universal rotary handle is available for each frame size of molded case circuit breaker. The handles are suitable for use with NEMA 1, 12, 4 or 4x enclosures. Features include:

- Large handle easily accommodates gloves
- Global ON/OFF markings (I/ON, O/OFF) and TRIP indication on handle
- Access Handle Lock-Off by pressing arrow on handle insert
- Door interlock and defeater
- Metal shaft and base
- Pipe valve operation (ON=Vertical, OFF=Horizontal) with 90 degree rotation
- UL 489, IEC 947-1/-2, CSA



**GHMVD12B**

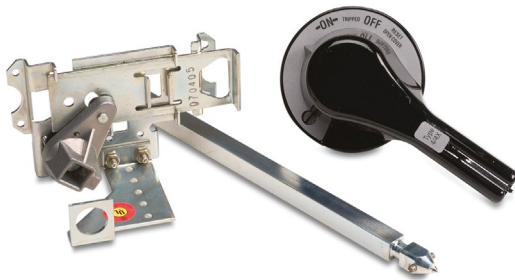


**HM1R12X**

Rotary Handle Accessory Selection Guide		
Part Number	Price	Description
<b>GHMVD06B</b>	\$66.25	NEMA 1/12 black rotary handle for G-Frame MCCB. Shaft length: 6"
<b>GHMVD12B</b>	\$73.25	NEMA 1/12 black rotary handle for G-Frame MCCB. Shaft length: 12"
<b>FHMVD12B</b>	\$73.25	NEMA 1/12 black rotary handle for F-Frame MCCB. Shaft length: 12"
<b>HM1R12X</b>	\$104.50	NEMA 4/4X black rotary handle for F-Frame MCCB. Shaft length: 12"
<b>HM1R24X</b>	\$118.25	NEMA 4/4X black rotary handle for F-Frame MCCB. Shaft length: 24"
<b>KHMVD12B</b>	\$106.50	NEMA 1/12 black rotary handle for K-Frame MCCB. Shaft length: 12"
<b>HM3R12X</b>	\$129.25	NEMA 4/4X black rotary handle for K-Frame MCCB. Shaft length: 12"
<b>HM3R24X</b>	\$143.75	NEMA 4/4X black rotary handle for K-Frame MCCB. Shaft length: 24"
<b>LHMVD12B</b>	\$122.50	NEMA 1/12 black rotary handle for L-Frame MCCB. Shaft length: 12"
<b>HM4R12X</b>	\$167.50	NEMA 4/4X black rotary handle for K-Frame MCCB. Shaft length: 12"
<b>HM4R24X</b>	\$176.50	NEMA 4/4X black rotary handle for K-Frame MCCB. Shaft length: 24"

### Flex Shaft™ Flexible Handle

Meeting crucial time limits for shutdown procedures is easier with an externally mounted handle. The flexible handle makes it possible to operate the circuit breaker externally, and can be used in enclosures of varying depths and heights. It can be used with NEMA 1, NEMA 3R and NEMA 12 enclosures, and accepts up to three padlock shackles.

**Note:** A minimum bending radius of four inches is necessary for proper operation.

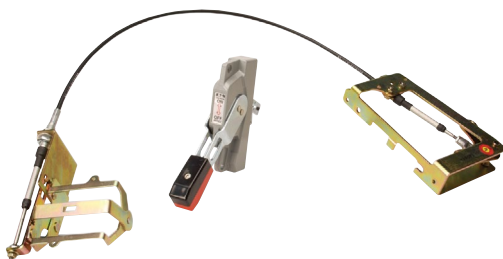


**F0S03C**

Flexible Handle Accessory Selection Guide		
Part Number	Price	Description
<b>F0S03C</b>	\$286.75	NEMA 1/12 flex shaft cable operator for G-Frame MCCB. Cable length: 3'
<b>F0S06C</b>	\$320.25	NEMA 1/12 flex shaft cable operator for G-Frame MCCB. Cable length: 6'
<b>F1S03C</b>	\$320.25	NEMA 1/12 flex shaft cable operator for F-Frame MCCB. Cable length: 3'
<b>F1S06C</b>	\$347.25	NEMA 1/12 flex shaft cable operator for F-Frame MCCB. Cable length: 6'
<b>F3S03C</b>	\$381.00	NEMA 1/12 flex shaft cable operator for K-Frame MCCB. Cable length: 3'
<b>F3S06C</b>	\$403.25	NEMA 1/12 flex shaft cable operator for K-Frame MCCB. Cable length: 6'
<b>F4S04C</b>	\$437.25	NEMA 1/12 flex shaft cable operator for L-Frame MCCB. Cable length: 4'
<b>F4S06C</b>	\$504.50	NEMA 1/12 flex shaft cable operator for L-Frame MCCB. Cable length: 6'

# 3P Series Molded Case Circuit Breakers – Accessories

## Field Mountable Accessories

### Auxiliary Contact

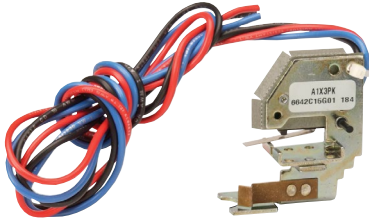

**A1X3PK**

The auxiliary contact provides circuit breaker contact status information by monitoring the position of the molded cross bar which contains the moving contact arms. The auxiliary switch is used for remote indication and interlock system verification, and consists of one SPDT switch housed in a plug-in module. Each SPDT switch has one 'a' and one 'b' contact. When the circuit breaker contacts are open, the 'a' contact is open and the 'b' contact is closed.


**Note:** Field installable auxiliary contacts are not available for the G and F frame breakers. For G and F frame auxiliary contacts, order breakers with -AUX as part of the part number. Please see G and F-frame sections for available selections.

Auxiliary Contact Accessory Selection Guide		
Part Number	Price	Description
<b>A1X3PK</b>	\$188.75	Field installable auxiliary contact for K-Frame MCCB, SPDT, 18" pigtail leads
<b>A1X4PK</b>	\$193.50	Field installable auxiliary contact for L-Frame MCCB, SPDT, 18" pigtail leads

K-Frame Electrical Ratings <sup>1,2</sup>					
	Max Volts	Frequency	Max Amperes	Dielectric Withstand Voltage	Notes
<b>K-Frame Auxiliary Switch</b>	600	50/60 Hz	6	2500	1. Endurance: 5000 electrical operations plus 1000 mechanical operations. 2. Pigtail wire size: 18 AWG (0.82 mm <sup>2</sup> ) 3. Non-inductive load
	125	DC	0.50 <sup>3</sup>		
	250	DC	0.25 <sup>3</sup>		

L-Frame Electrical Ratings <sup>1,2</sup>					
	Max Volts	Frequency	Max Amperes	Dielectric Withstand Voltage	Notes
<b>L-Frame Auxiliary Switch</b>	600	50/60 Hz	6	2500	1. Endurance: 5000 electrical operations plus 1000 mechanical operations. 2. Pigtail wire size: 18 AWG (0.82 mm <sup>2</sup> ) 3. Non-inductive load
	125	DC	0.50 <sup>3</sup>		
	250	DC	0.25 <sup>3</sup>		

### Undervoltage Release

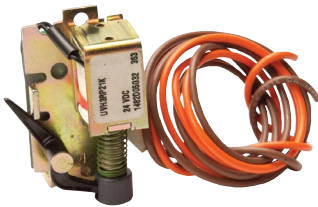

**UVH3LP21K**

This product monitors a voltage (typically a line voltage) and trips the circuit breaker when the voltage falls to between 70% and 35% of the solenoid coil rating. It consists of a continuous rated solenoid, with a plunger and tripping lever mounted in a plug-in module.

**Note:** The undervoltage release is a pre-installed accessory on G-Frame and F-Frame breakers.

Undervoltage Release Accessory Selection Guide		
Part Number	Price	Description
<b>UVH3LP08K</b>	\$383.25	Field installable 110 - 127 VAC undervoltage release for K-Frame MCCB
<b>UVH4LP08K</b>	\$386.00	Field installable 110 - 127 VAC undervoltage release for L-Frame MCCB
<b>UVH3LP21K</b>	\$383.25	Field installable 24 VDC undervoltage release for K-Frame MCCB
<b>UVH4LP21K</b>	\$409.25	Field installable 24 VDC undervoltage release for L-Frame MCCB

<b>K-Frame Undervoltage Release Mechanism</b>	Supply Voltage	Dropout Voltage		Pickup Voltage	VA	Notes
		Min	Max	Max		
	24 VDC	8.4	16.8	20.4	3.1	1. Endurance: 5000 electrical operations plus 1000 mechanical operations. 2. 50/60 Hz
	110 VAC <sup>2</sup>				1.8	
	120 VAC <sup>2</sup>	44.5	77.0	93.5	2.1	
	127 VAC <sup>2</sup>				2.4	

<b>L-Frame Undervoltage Release Mechanism</b>	Supply Voltage	Dropout Voltage		Pickup Voltage	VA	Notes
		Min	Max	Max		
	24 VDC	8.4	16.8	20.4	3.1	1. Endurance: 5000 electrical operations plus 1000 mechanical operations. 2. 50/60 Hz
	110 VAC <sup>2</sup>				1.8	
	120 VAC <sup>2</sup>	44.5	77.0	93.5	2.1	
	127 VAC <sup>2</sup>				2.4	

# 3P Series Molded Case Circuit Breakers – Accessories

## Field Mountable Accessories

### Shunt Trip

The Shunt Trip provides remote controlled tripping of the circuit breaker. Consisting of an intermittent rated solenoid with a tripping plunger and a cutoff switch assembled to a plug-in module, shunt trip coils are designed to be applied at specific AC or DC voltages.



**SNT3P04K**

Shunt Trip Accessory Selection Guide		
Part Number	Price	Description
<b>SNT3P11K</b>	\$383.25	Field installable 110/240 VAC / 110/125 VDC shunt trip for K-Frame MCCB.
<b>SNT4RP11K</b>	\$409.25	Field installable 110/240 VAC shunt trip for L-Frame MCCB
<b>SNT3P04K</b>	\$383.25	Field installable 12/24 VAC/DC shunt trip for K-Frame MCCB
<b>SNT4RP03K</b>	\$409.25	Field installable 12/24 VAC/DC shunt trip for L-Frame MCCB

K-Frame Shunt Trip	Supply Voltage	Min Operating Voltage	VA	Supply Voltage	Min Operating Voltage	VA	Notes	
	VAC 50/60 Hz			VDC				1. Endurance: 5000 electrical operations plus 1000 mechanical operations. 2. Approx. unlatching time: 6 ms Approx. total circuit breaker contact opening time: 8 ms
	12	9	45	12	8.4	35		
24	200		24	—	170			
110	60	100	110	77	110			
120		120	120	77	130			
127		140	125	77	140			
208		420	—	—	—			
220		470	—	—	—			
240		550	—	—	—			


L-Frame Shunt Trip	Supply Voltage	Min Operating Voltage	VA	Supply Voltage	Min Operating Voltage	VA	Notes	
	VAC 50/60 Hz			VDC				1. Endurance: 5000 electrical operations plus 1000 mechanical operations. 2. Approx. unlatching time: 6 ms Approx. total circuit breaker contact opening time: 18 ms
	12	9	45	12	9	35		
24	200		24	—	170			
110	60	100	—	—	—			
120		120	—	—	—			
127		140	—	—	—			
208		420	—	—	—			
220		470	—	—	—			
240		550	—	—	—			

# 3P Series Molded Case Circuit Breakers – Accessories

## Field Mountable Accessories

### Six-wire Connector

This is a field installable multi-wire connector which allows six wires to be connected to the load side (OFF) end terminals. It is used to distribute the load from the circuit breaker to multiple devices without the use of separate distribution terminal blocks. UL listed for copper only as used on the load side (OFF) end. Includes mounting hardware, insulators and tin-plated aluminum connectors.

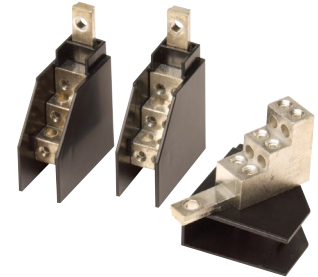


**3TA100G6K**

Six-wire Connector Accessory Selection Guide		
Part Number	Price	Description
<b>3TA100G6K</b>	\$52.00	For G-Frame MCCBs. Pkg. of 3. Wire size: 14 - 6 AWG, copper
<b>3TA150F6K</b>	\$52.00	For F-Frame MCCBs. Pkg. of 3. Wire size: 14 - 6 AWG, copper

### Replacement Lug Kit

Line and load terminals provide wire connecting capabilities for specific ranges of continuous current ratings and wire types. Replacement lugs will accept wire types Cu/Al as standard.

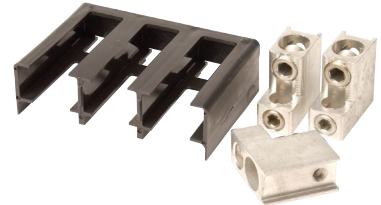

**3TA401K**

Replacement Lug Kit Accessory Selection Guide		
Part Number	Price	Description
<b>3TA225FD</b>	\$77.25	Replacement lug kit for F-Frame MCCB. Wire range (1) #4-4/0 (25-95 mm <sup>2</sup> ). Package of (3) terminals.
<b>3TA401K</b>	\$81.00	Replacement lug kit for K-Frame MCCB. Wire range (2) 2/0-250 kcmil or (1) 2/0-500 kcmil (70-240 mm <sup>2</sup> ). 3-pole kit (one terminal per pole and one terminal cover).
<b>3TA603LDK</b>	\$100.25	Replacement lug kit for L-Frame MCCB. 3-pole kit (one terminal per pole and one terminal cover). Wire range 400-500 AWG (185-240 mm <sup>2</sup> ), 2 conductors.

*Note: G-frame terminals are factory-installed only. No replacement terminals available.*

### Din Rail Mounting Clip

Din Rail Mount Clip Accessory Selection Guide		
Part Number	Price	Description
<b>GDIN</b>	\$9.00	Clip for mounting G-Frame to 35 mm Din rail. Mounting hardware included. Pkg of 1



**GDIN**

### NEMA 12 Safety Door Hardware

Type C361 door interlocking safety handle kits are designed for use with AutomationDirect 3P series MCCBs and flexible handle, when mounted in an SDN12, or equivalent, enclosure. These handles secure the SDN12 enclosure, protecting against unauthorized entry while the MCCB is in the ON position. Use them on enclosures with right side flanges only and material thickness from 16 gauge through 3/16". All mounting hardware is included for enclosures up to 40" tall. The addition of the C361KR roller kit is necessary for enclosures taller than 40" that require a 3-point latch. See SDN12 Enclosures section for enclosure specifications

Safety Door Hardware Selection Guide		
Part Number	Price	Description
<b>C361KJ4</b>	\$232.00	Handle length: 4". Mounting hardware included for enclosures up to 40" tall. For taller enclosures that require a 3-point latch, the C361KR (purchase separately) will also be needed.
<b>C361KJ6</b>	\$243.75	Handle length: 6". Mounting hardware included for enclosures up to 40" tall. For taller enclosures that require a 3-point latch, the C361KR (purchase separately) will also be needed.
<b>C361KR</b>	\$52.50	Door Interlocking safety roller kit for use with the C361KJ4 and C361KJ6 safety handle kits when the SDN12 series enclosure is taller than 40 inches and 3-point latching is required. Kit includes roller and all hardware.

*Note: The 1/4" x 1/2" standard mill rectangular locking bar is not supplied with these kits. The bar is supplied with the enclosures.*



**Safety Handle shown on enclosure**