

# IDEM LPC and LMC Duty Non-Contact Coded Magnetic Safety Switches



## LPC Series Plastic Housing

## LMC Series Stainless Steel Housing


- Coded magnetic actuation
- Narrow housing can be fitted into narrow channels
- Can be high-pressure hosed at high temperature - IP69K rated
- LED indication
- Wide 14 mm sensing distance, high tolerance to misalignment
- Long life switching capability - up to 0.2A
- Will operate with most safety relays
- Available with 2m, 5m, or 10m cable or 250mm pigtail with quick-disconnect cable

### LMC Only

- Specifically designed for food processing applications
- Suitable for CIP SIP cleaning - Food Splash Zones per EHEDG guidelines
- 316 Stainless steel mirror polished finish

**See Dimensions later in this section.**

### Actuator Operating Direction



LPC, LMC

LPC and LMC Non-Contact Coded Magnetic Safety Switches					
Part Number	Price	Body Material	Cable Length	Circuits	Contact Rating
<b>Pigtail Versions</b>					
LPC-110005	\$80.00	Plastic	2m	2 NC, 1 NO	0.2A
LPC-110006	\$84.00		5m		
LPC-110007	\$98.00		10m		
LMC-133005	\$129.00	Stainless steel	2m		
LMC-133006	\$139.00		5m		
LMC-133007	\$152.00		10m		
<b>Quick Disconnect Versions (M12 8-pin)</b>					
LPC-110008	\$108.00	Plastic	250mm	2 NC, 1 NO	0.2A
LMC-133008	\$160.00	Stainless steel	250mm		

Female Quick Disconnect Lead			
Part Number	Price	Description	Exit Type/Cable Length
140101	\$31.00	Female QD Lead	M12 Female 5m, 8-pin
140102	\$39.00		M12 Female 10m, 8-pin




# IDEM LPC and LMC Duty Non-Contact Coded Magnetic Safety Switches

## Dimensions


mm [inch]

### LPC Series

#### Pigtail


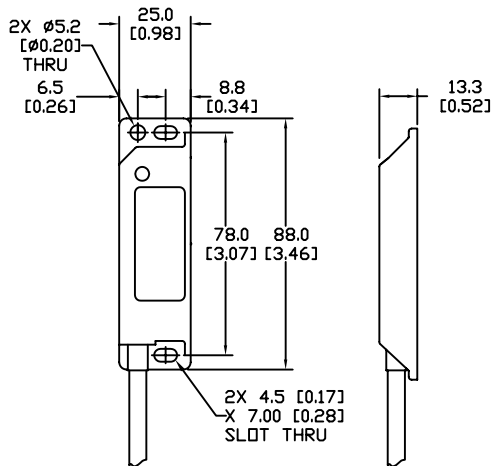


SWITCH

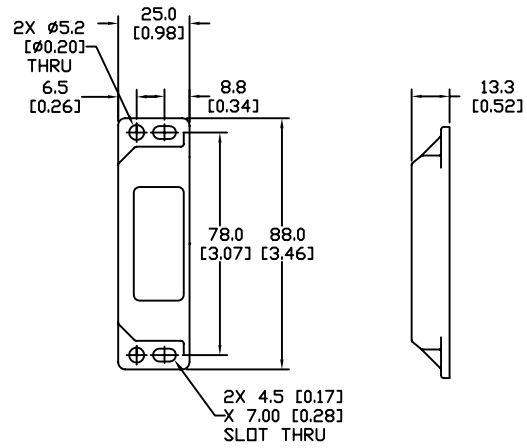

ACTUATOR

#### Quick Disconnect

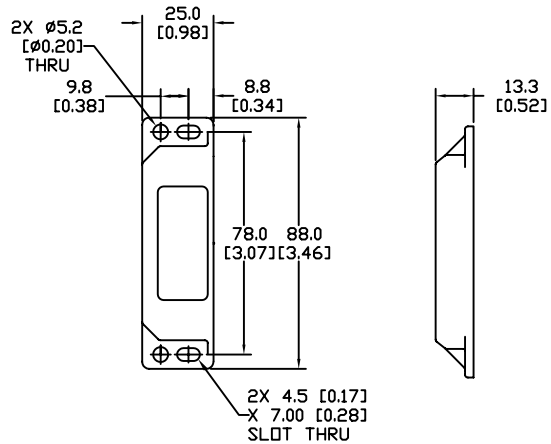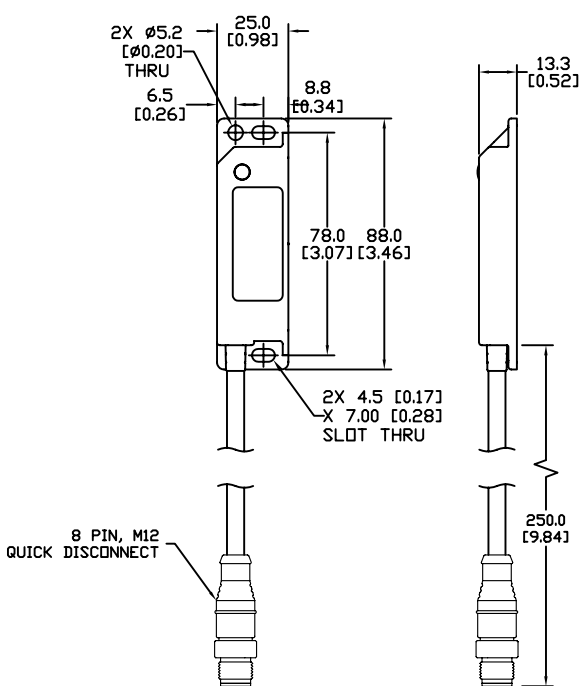

SEE OUR WEBSITE: [WWW.AUTOMATIONDIRECT.COM](http://WWW.AUTOMATIONDIRECT.COM) FOR COMPLETE ENGINEERING DRAWINGS.


# IDEM LPC and LMC Duty Non-Contact Coded Magnetic Safety Switches

## Dimensions


mm [inch]

### LMC Series

#### Pigtail

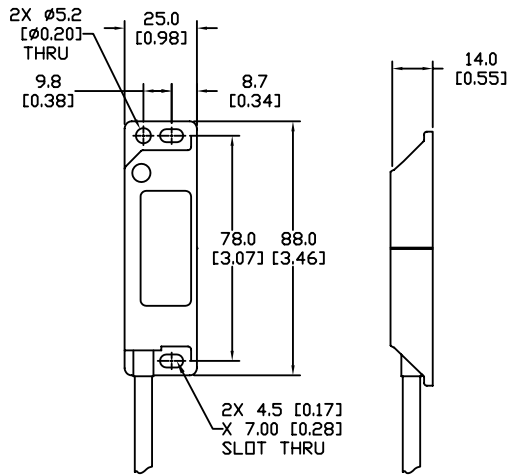


SWITCH

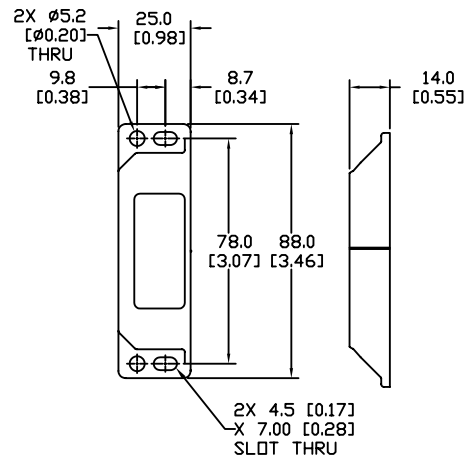


ACTUATOR

#### Quick Disconnect

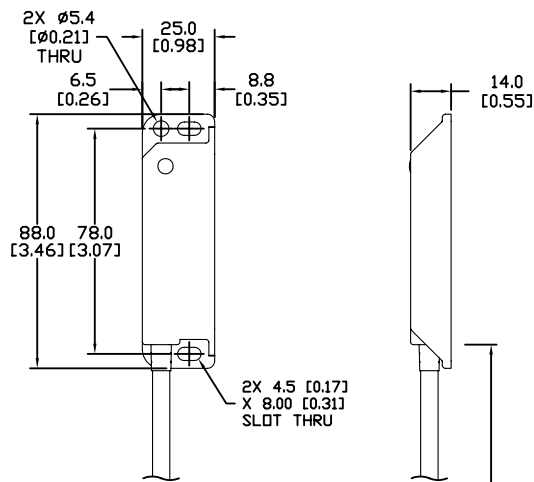

SWITCH

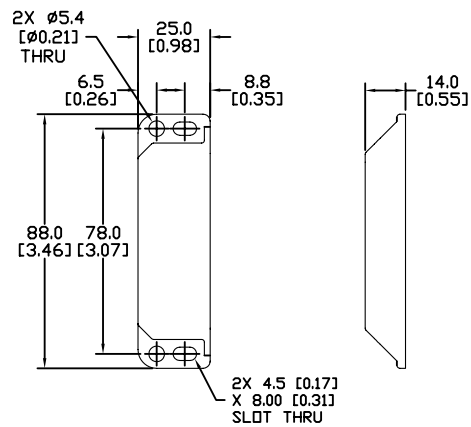

ACTUATOR

8 PIN, M12 QUICK DISCONNECT


250.0 [9.84]

SEE OUR WEBSITE: [WWW.AUTOMATIONDIRECT.COM](http://WWW.AUTOMATIONDIRECT.COM) FOR COMPLETE ENGINEERING DRAWINGS.

# IDEM Non-Contact Safety Switches Electrical Connections and Dimensions


## Electrical Connections

### Magnetic Switches

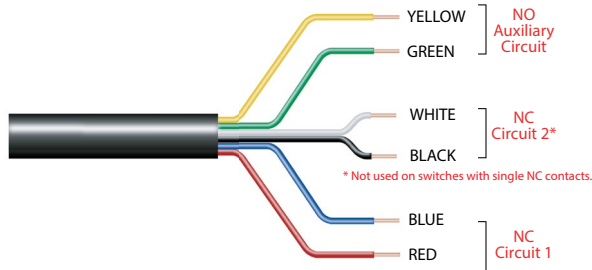


Magnetic Switches - Electrical Connections		
Quick Disconnect Connector Pin Out	Lead Color	Type of Circuit (Actuator Present)
4	Yellow	NO
6	Green	NO
7	Black	NC2
1	White	NC2
2	Red	NC1
3	Blue	NC1

### Coded Magnetic and RFID Switches

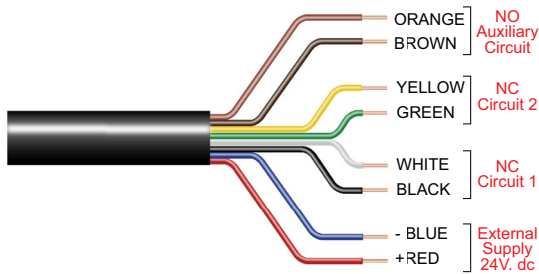

Coded Magnetic Switches - Electrical Connections			
Quick Disconnect Connector Pin Out	Lead Color	Type of Circuit (Actuator Present)	Output Types (Solid State)
8	Orange	Auxiliary (NO)	200 mA max. 24 VDC
5	Brown	Auxiliary (NO)	
4	Yellow	NC2 +	200 mA max. 24 VDC (Optocoupler)
6	Green	NC2 -	
7	Black	NC1 +	200 mA max. 24 VDC (Optocoupler)
1	White	NC1 -	
2	Red	Supply +24 VDC	Supply 24 VDC +10% / -15%
3	Blue	Supply 0VDC	

### Connection Colors




Pin View from Switch  
M12 Male

# IDEM Non-Contact Safety Switches Specifications

Non-contact Safety Switches Specifications			
	Non-Contact Magnetic Switches	Non-Contact Coded Magnetic Switches	Non-Contact RFID Coded Switches
<b>Safety Classification and Reliability Data</b>			
<b>Switching Reliability (B10d)</b>	3.3 x 10 <sup>6</sup> operations at 100 mA load		No mechanical parts implemented
<b>ISO 13849-1</b>	Up to category 4 with safety relay		
<b>ISO 13849-1</b>	Up to PLe depending upon system architecture		
<b>EN 62061</b>	Up to SIL3 depending upon system architecture		
<b>Safety Data - Annual Usage</b>	8 cycles per hour / 24 hours per day / 365 days		
<b>PFHd</b>	2.8 x 10 <sup>-10</sup>	2.6 x 10 <sup>-10</sup>	4.77 x 10 <sup>-10</sup>
<b>Proof Test Interval (Life)</b>	20 Years		
<b>MTTFd</b>	866 Years		1100 years
<b>Agency Approvals</b>	CE, cULus		
<b>Electrical and General Specifications</b>			
<b>Contact Ratings: Safety Contact NC</b>	MPR: Voltage free: 250 VAC, 0.5 A Max.	24 VDC, 0.2A Max. (Optocoupler)	
	LPR, LMR, SPR, SMR, SMR-F: Voltage free: 250 VAC, 1.0A Max. CPR, CMR, CMR-F, WPR: Voltage free: 250 VAC, 2.0A Max.		
<b>Contact Ratings: Monitoring (Auxiliary) Contact NO</b>	Voltage free: 24 VDC, 0.2A Max.	24 VDC, 0.2A Max.	
<b>Recommended Fuses (NC Circuits)</b>	MPR: Fuse externally 0.4A (F)	NA	
	LPR, LMR, SPR, SMR, SMR-F, CMR, CMR-F: Fuse externally 0.8A (F)		
	CPR, WPR: Fuse externally 1.6A (F)		
<b>Contact Release Time</b>	<2ms	NA	
<b>Initial Contact Resistance</b>	<500 milliohm	NA	
<b>Minimum Switched Current</b>	10 VDC, 1mA		
<b>Dielectric Withstand</b>	250 VAC		
<b>Insulation Resistance</b>	100 Megohms		
<b>Recommended Setting Gap</b>	5mm		
<b>NC Switching Distance</b>	Sao (assured ON) 8mm close; Sar (assured OFF) 20 mm open		
<b>NC Switching Operation</b>	For all switches the NC circuits are closed when the guard is closed and the actuator is present.		
<b>NO Switching Operation</b>	Opens before NC circuits close		
<b>Tolerance to Misalignment</b>	5mm in any direction from 5mm setting gap (See Misalignment Range drawing on this page)		
<b>Switching Frequency</b>	1.0 Hz Max.		
<b>Approach Speed</b>	200 mm per minute to 1000 mm per second		
<b>Body Material - Polyester</b>	CPR, LPR, MPR, SPR, WPR	CPC, LPC, MPC, SPC, WPC	LPF, SPF
<b>Body Material - 316 Stainless Steel</b>	CMR, CMR-F, LMR, SMR, SMR-F	CMC, CMC-F, LMC, SMC, SMC-F	NA
<b>Operating Temperature Range</b>	Polyester: -25° to +80°C (-13° to +176° F)		
	316 Stainless Steel: -25° to +105° C (-13° to +221° F)		NA
<b>Storage Temperature (Low)</b>	-55° to -40° C (-67° to -40° F)		
<b>Enclosure Protection</b>	IP67, IP69K		
<b>Shock Resistance</b>	IEC 68-2-27 11 ms 30g		
<b>Vibration Resistance</b>	IEC 68-2-6 10-55 Hz 1mm		
<b>Cable Type</b>	PVC, 6.5 mm outside diameter max.		PVC, 6mm outer diameter max.
<b>Mounting Bolts (recommended)</b>	2 x M4; Tightening torque: 1.0 Nm		

Note: Always mount onto non-Ferrous materials.

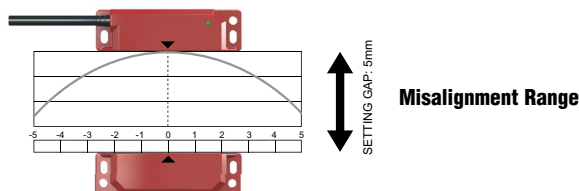

# Safety Products



***Warning: Safety products sold by AutomationDirect are Safety components only. The purchaser/installer is solely responsible for the application of these components and ensuring all necessary steps have been taken to assure each application and use meets all performance and applicable safety requirements and/or local, national and/or international safety codes as required by the application. AutomationDirect cannot certify that our products, used solely or in conjunction with other AutomationDirect or other vendors' products, will assure safety for any application. Any person using or applying any products sold by AutomationDirect is responsible for learning the safety requirements for their individual application and applying them, and therefore assumes all risks, and accepts full and complete responsibility, for the selection and suitability of the product for their respective application. AutomationDirect does not provide design or consulting services, and cannot advise whether any specific application or use of our products would ensure compliance with the safety requirements for any application.***