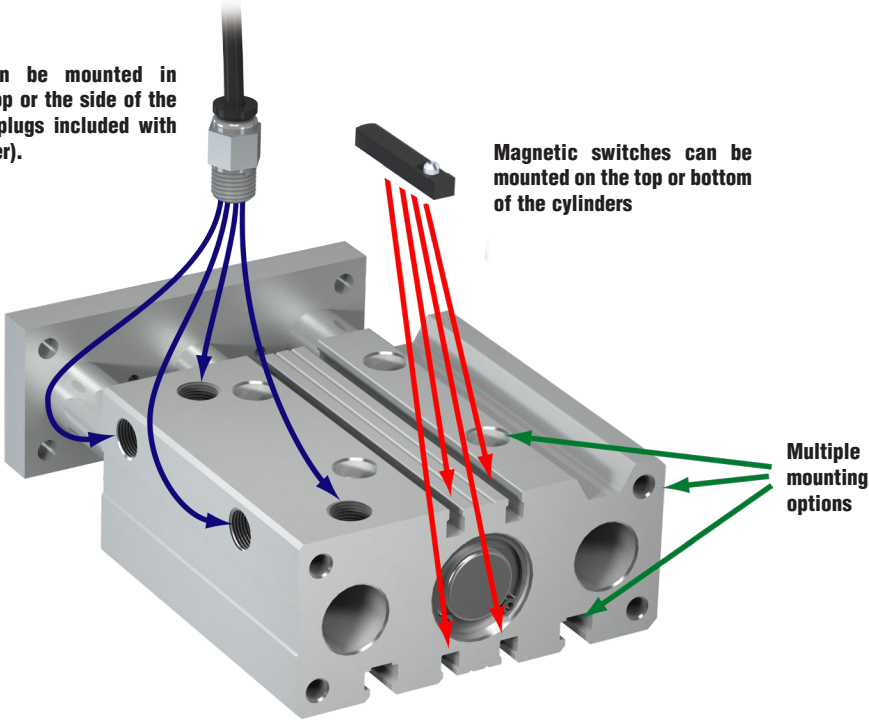




E-Series Dual Guide Rod Cylinders

Fittings can be mounted in either the top or the side of the cylinder (2 plugs included with each cylinder).

Magnetic switches can be mounted on the top or bottom of the cylinders



Multiple mounting options

NITRA pneumatic guided actuator with dual guide rods, bronze bushings, extruded aluminum housing and switch mounting tracks.

- Eight bore sizes
- Interchangeable with other popular brands
- Work with 4mm square T-slot cylinder switches
- Chrome plated stainless steel guide rods
- Mild steel tooling plate
- Nitrile / Buna-N O-rings


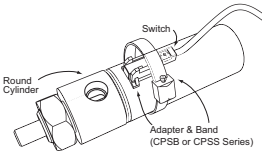
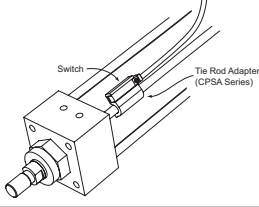




















E-Series Dual Guide Rod Cylinder Specifications								
Bore Size (mm)	12	16	20	25	32	40	50	63
Action	Double acting							
Fluid	Air (clean/dry)							
Temperature Range	23 to 158°F (-5 to 70°C)							
Pressure Range	18-142 psi (1.2-10 bar)							
Proof Pressure	213 psi (15 bar)							
Lubrication	Not required							
Cushion Type	Urethane Bumper							
Non-Rotate Tolerance	±0.10°		±0.09°		±0.08°		±0.06°	
Port Size	M5x0.8		1/8-NPT				1/4-NPT	
Extend Force @ 100 psi (lbs.)	17.5	31.2	48.7	76.1	124.7	194.8	304.3	483.2
Retract Force @ 100 psi (lbs.)	9.7	19.0	31.2	44.9	76.0	146.1	255.6	434.5



CPS Series Cylinder Position Switches

Position Switch Cross Reference Chart

NITRA Switch Type	Cylinder Brand (may fit some of these cylinders)	Photo Example	Groove Illustration	
<p>CPS CPSF</p>	<p>NITRA A-Series, D-Series, F-Series</p>			
<p>CPS9C</p>	<p>DE-STA-CO Robohand SMC Compact Air</p>			
<p>CPS9D</p>	<p>Fabco Numatics Rotomation</p>			
<p>CPS9F</p>	<p>NITRA G-Series Fabco Festo Numatics Rotomation</p>			
<p>CPS9H</p>	<p>NITRA E-Series NITRA H-Series</p>			
<p>CPS9M</p>	<p>Norgren</p>			
<p>CPS9Q</p>	<p>NITRA G-Series Parker</p>			
<p>CPS9T</p>	<p>SMC</p>	