

prosense® F8 Series Barrel Photoelectric Sensors



M8 (8mm) Barrel Photoelectric Sensors

- M8 small dimension housing
- LED status indicator for all models
- Complete protection against electrical damage
- IP67 protection
- Strong stainless steel housing
- Background suppression, diffuse, retroreflective and through- beam available
- Visible red light emission



F8 Series M8 Photoelectric Sensors Selection Chart

Part Number	Price	Sensing Range	Switching Frequency	Light Emission	Through-beam Component	Logic	Output Function	Connection Type	Wiring	Drawing Link
Diffuse Reflective with Adjustable Background Suppression										
<u>F8RS-LP-2F</u>		7–30mm [0.28–1.18in]	450 Hz	Visible red	NA	PNP N.O.	Light-on	3-pin M8 quick-disconnect	Diagram 1	<u>PDF</u>
<u>F8RS-LN-2F</u>		7–30mm [0.28–1.18in]	450 Hz	Visible red	NA	NPN N.O.	Light-on	3-pin M8 quick-disconnect	Diagram 2	<u>PDF</u>
Diffuse Reflective with Fixed Background Suppression										
<u>F8RS-LP-1F</u>		0–20mm [0–0.79in]	450 Hz	Visible red	NA	PNP N.O.	Light-on	3-pin M8 quick-disconnect	Diagram 1	<u>PDF</u>
<u>F8RS-LN-1F</u>		0–20mm [0–0.79in]	450 Hz	Visible red	NA	NPN N.O.	Light-on	3-pin M8 quick-disconnect	Diagram 2	<u>PDF</u>
Diffuse Reflective										
<u>F8R6-LP-1F</u>		1–60mm [0.04–2.36in]	500 Hz	Visible red	NA	PNP N.O.	Light-on	3-pin M8 quick-disconnect	Diagram 1	<u>PDF</u>
<u>F8R6-LN-1F</u>		1–60mm [0.04–2.36in]	500 Hz	Visible red	NA	NPN N.O.	Light-on	3-pin M8 quick-disconnect	Diagram 2	<u>PDF</u>
Retroreflective Sensor *										
<u>F8RP-DP-1F</u>		0–1m [0–3.28ft]	500 Hz	Visible red	NA	PNP N.O.	Dark-on	3-pin M8 quick-disconnect	Diagram 1	<u>PDF</u>
<u>F8RP-DN-1F</u>		0–1m [0–3.28ft]	500 Hz	Visible red	NA	NPN N.O.	Dark-on	3-pin M8 quick-disconnect	Diagram 2	<u>PDF</u>
Through-beam										
<u>F8RE-00-1F</u>		0–2.2m [0–7.22ft]	NA	Visible red	<u>F8RR-DP-1F</u> or <u>F8RR-DN-1F</u>	NA	NA	3-pin M8 quick-disconnect	Diagram 3	<u>PDF</u>
<u>F8RR-DP-1F</u>		0–2.2m [0–7.22ft]	500 Hz	NA	<u>F8RE-00-1F</u>	PNP N.O.	Dark-on	3-pin M8 quick-disconnect	Diagram 1	<u>PDF</u>
<u>F8RR-DN-1F</u>		0–2.2m [0–7.22ft]	500 Hz	NA	<u>F8RE-00-1F</u>	NPN N.O.	Dark-on	3-pin M8 quick-disconnect	Diagram 2	<u>PDF</u>

* Purchase reflector separately

Warning: These products are not safety sensors and are not suitable for use in personal safety applications.


prosense® F8 Series Barrel Photoelectric Sensors

F8 Series M8 Photoelectric Specifications					
Sensor type	Diffuse reflective with adjustable background suppression	Diffuse reflective with fixed background suppression	Diffuse reflective	Retroreflective	Through-beam
Sensing Distance	7–30mm [0.28–1.18in]	0–20mm [0–0.79in]	1–60mm [0.04–2.36in]	0–1m [0–3.28ft]	0–2.2m [0–7.22ft]
Light Spot Diameter	See Product Insert				
Emission	Visible red				
Output Types	See Sensor Selection Chart				
Operating Voltage	10–30 VDC				
No Load Supply Current	≤15 mA				
Operating (Load) Current	100 mA				
Voltage Drop	≤0.7V				
Switching Frequency	450 Hz	450 Hz	500 Hz	500 Hz	500 Hz NA for F8RE-00-1F
Ripple	5%		10%		
Time Delay Before Availability (tv)	≤1.11 ms		≤1 ms		
Short-circuit Protection	Yes				
Operating Temperature	-5 to +55 °C [23 to +131 °F]				
Protection Degree	IP64	IP67	IP67	IP67	IP67
LED Indicators - Switching Status	Yellow LED: light received; yellow LED flashing: limit range				
Housing Material	Stainless steel				
Lens Material	PMMA - Polymethyl methacrylate				
Shock/Vibration	IEC 60947-5-2				
Tightening Torque	6 N•m [4.42 lb•ft]				
Weight	5.5g [0.19 oz]	5.1g [0.17 oz]	5.2g [0.18 oz]		
Connectors	3-pin M8 quick-disconnect				
Agency Approvals	cULus, CE, WEEE, IEC 60947-5-2				

To obtain the most current agency approval information, see the Agency Approval Checklist section on the specific part number's web page.

Wiring Diagrams

Diagram 1
PNP Output

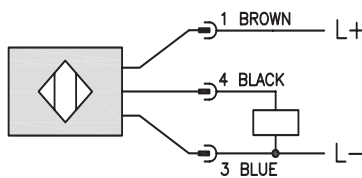

M8 Connector




Diagram 2
NPN Output


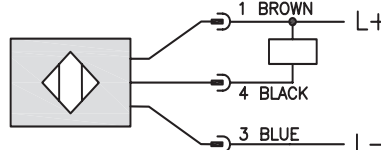


Diagram 3
Emitter

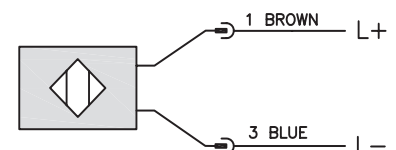

Accessories for 8mm Sensors

Axial Mounting Bracket

Mounting bracket, axial, zinc-plated steel. For use with 8mm sensors. Has two mounting holes (use 3mm screws) and allows the rotation of an optical axis for axial sensors. Hexagonal nuts not included.

Accessories for 8mm Sensors				
Part Number	Price	Description	Drawing Link	Weight [lb]
<u>ST08A</u>		Micro Detectors mounting bracket, axial, zinc plated steel. For use with 8mm sensors.	<u>PDF</u>	0.04



[ST08A](#)

Right-angle Mounting Bracket

Mounting bracket, right-angle, zinc-plated steel. For use with 8mm sensors. Has two mounting holes (use 3mm screws) and allows the rotation of an optical axis for right-beam-angle-adaptor sensors. Hexagonal nuts not included.

Accessories for 8mm Sensors				
Part Number	Price	Description	Drawing Link	Weight [lb]
<u>ST08C</u>		Micro Detectors mounting bracket, right-angle, zinc plated steel. For use with 8mm sensors.	<u>PDF</u>	0.04



[ST08C](#)

Accessories for 8mm Sensors

Right-angle Mounting Bracket

Mounting bracket, right-angle, plastic. For use with 8mm sensors.

Accessories for 8mm Sensors				
Part Number	Price	Description	Drawing Link	Weight [lb]
OPT2101		Wenglor mounting bracket, right-angle, plastic. For use with 8mm sensors.	PDF	0.02



[OPT2101](#)

Right-angle Swivel Mounting Systems

Mounting bracket, right-angle swivel, 360-degree vertical and horizontal adjustment. For use with 8mm sensors. Available in all stainless steel or with an aluminum head and stainless steel mounting plate.

Accessories for 8mm Sensors						
Part Number	Price	Description	Mounting Head	Mounting Plate	Drawing Link	Weight [lb]
OPT2112		Wenglor mounting bracket, right-angle swivel, 360 degree vertical and horizontal adjustment, aluminum, 12mm rod mount. For use with 8mm sensors.	Aluminum	304 Stainless Steel	PDF	0.14
OPT2113		Wenglor mounting bracket, right-angle swivel, 360 degree vertical and horizontal adjustment, 304 stainless steel, 12mm rod mount. For use with 8mm sensors.	304 Stainless Steel	304 Stainless Steel	PDF	0.26



[OPT2112 & OPT2113](#)

Note: 304 Stainless steel mounting rods sold separately: [OPT2109](#) (200mm length), [OPT2110](#) (300mm length), and [OPT2111](#) (500mm length).


Reflectors

RL Series Reflectors for Polarized Reflective Photoelectric Sensors (All Models)

- Suitable for use with polarized light photoelectric sensors
- Shapes and sizes for most applications
- Miniature types for close mounting in multiple sensor installations
- Single hole, dual hole and self-adhesive mounting types available
- Single and 10-packs available

Installation Notes

- Keep the reflector surface clean to ensure peak detection performance. This is especially true when the maximum sensing range is being used. Clean using a damp cloth.
- When selecting a reflector, it is important to consider the ambient conditions it will be exposed to. Dusty or high humidity conditions may reduce the sensing range as much as 90%.
- Reflectors should be positioned at a 90° angle to the optical axis with a tolerance of $\pm 15^\circ$.

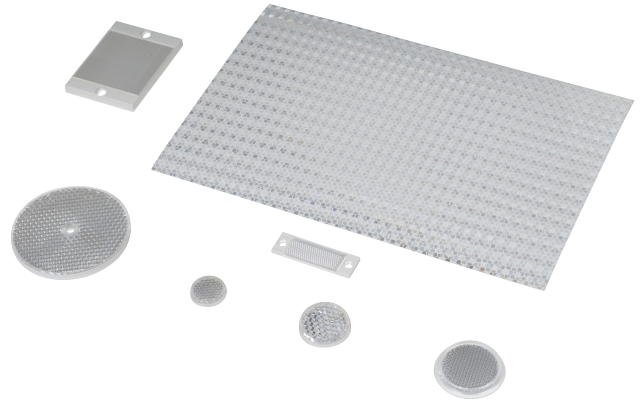

Reflector Specifications							
Part number	Price	Drawing Link	Quantity	Dimensions mm [in]	Degree of Protection	Mounting	Materials
RL102		PDF	10	25	IEC IP67	Customer-supplied adhesive or other mounting method required	Reflective face: PMMA Polymethylmethacrylate (acrylic) Base material: ABS (Acrylonitrile-butadiene-styren)
RL102-1			1	[0.98]			
RL103		PDF	10	34.5			
RL103-1			1	[1.36]			
RL104		PDF	10	46			
RL104-1			1	[1.81]			
RL105G		PDF	10	95 x 38		Two 4.3mm holes	
RL105G-1			1	[3.74 x 1.50]			
RL106G		PDF	10	182 x 42		Two 6mm holes	
RL106G-1			1	[7.17 x 1.65]			
RL110		PDF	10	84		One 5mm hole	
RL110-1			1	[3.31]			
RL116		PDF	10	41 x 60		Two 3mm holes	
RL116-1			1	[3.54 x 2.36]			
RL100DA4		NA	1	200 x 300 [7.87 x 11.81]		Self-adhesive	Paper (Acrylic tape with micro prism)
RL100DC4		NA	1	50 x 300 [1.97 x 11.81]			
RL100DQ1		NA	1	100 x 100 [3.94 x 3.94]			
RL111G		PDF	10	22.5 x 47		Two 3mm slots	Reflective face: PMMA Polymethylmethacrylate (acrylic) Base material: ABS (Acrylonitrile-butadiene-styren)
RL111G-1			1	[0.89 x 1.85]			
RL112G		PDF	10	19 x 73			
RL112G-1			1	[0.75 x 2.87]			
RL113G		PDF	10	51.4 x 60.3		Two 4mm slots	
RL113G-1			1	[2.02 x 2.37]			

Not recommended for applications involving moist air environments or water immersion.

Reflectors

RL Series Reflectors for Polarized Reflective Laser Photoelectric Sensors (FALN series)

- Suitable for use with polarized light laser photoelectric sensors
- Sizes for most applications
- Miniature types for close mounting in multiple sensor installations
- Single and 5-packs available

Specifications						
Part Number	<i>RL201</i>	<i>RL201-1</i>	<i>RL203</i>	<i>RL203-1</i>	<i>RL204</i>	<i>RL204-1</i>
Price						
Quantity	5	1	5	1	5	1
Drawing Link	PDF		PDF		PDF	
Dimensions	60 x 82mm 2.36 x 3.23in		19 x 6mm 0.75 x 2.36in		20mm x 32mm 0.80 in x 1.26in	
Degree of Protection ¹	IEC IP67					
Mounting	Two 0.4mm holes		Two 0.4mm holes		Two 0.3mm holes	
Materials	Acrylic/polycarbonate					

¹ Not recommended for applications involving moist air environments or water immersion.