

DINnectors Accessories

Steel DIN Rails Features



35 mm wide

- Available in 1-meter lengths
- 7.5 mm-high rails primarily used to mount terminal blocks, relays, timers and small PLCs such as the DL05, DL06, DL105, DL205, CLICK, and Productivity3000
- 15 mm-high rails for mounting larger and heavier components such as contactors and larger PLCs

15 mm wide

- Available in 1-meter lengths
- DN-R15S1 exclusively for mounting mini terminal blocks such as the DN-M10-A

| | Part Number | Pcs/Pkg | Price/Pkg | Part# | Pcs/Pkg | Price/Pkg | Part Number | Pcs/Pkg | Price/Pkg |
|--|--|---------|-----------|---|---------|-----------|--|---------|-----------|
| DIN Rail | DN-R35S1 | 10 | <---> | DN-R35HS1 | 10 | <---> | DN-R15S1 | 10 | <---> |
| | DN-R35S1-2 | 2 | <---> | DN-R35HS1-2 | 2 | <---> | DN-R15S1-2 | 2 | <---> |
| Steel DINnectors Accessories Specifications | | | | | | | | | |
| Description | Steel, slotted, 3'3" (1 m) length, 35 mm (1.38 in) wide, 7.5 mm (0.30 in) high | | | Steel, slotted, 3'3" (1 m) length, 35 mm (1.38 in) wide, 15 mm (0.59 in) high | | | Steel, slotted, 3'3" (1 m) length, 15 mm (0.59 in) wide, 5.5 mm (0.22 in) high | | |
| Plating | Zinc-plated and chromated | | | | | | | | |
| International Standards | EN60715. RoHS | | | | | | | | |
| Suggested Mounting Screw Type | M6 | | | M6 | | | M4 | | |

Aluminum DIN Rail Features



35 mm wide

- Non-anodized finish
- Zinc plating and passivation (minimum thickness 6 microns)
- Lightweight, easy to cut and deburr
- Terminal blocks only
- Maximum mounting screw #10-32 or M5
- Available in 1-meter lengths




35 mm wide raised

- Non-anodized finish
- Zinc plating and passivation (minimum thickness 6 microns)
- Enables users to raise terminal blocks 2¼" above the back panel
- Terminal blocks only
- Available in 1-meter lengths
- Bushing or grommet recommended for wire access hole (example Heyco UB-875 not sold by ADC)


| | Part Number | Pcs/Pkg | Price/Pkg | Part Number | Pcs/Pkg | Price/Pkg |
|---|--|---------|-----------|--|---------|-----------|
| DIN Rail | DN-R35SAL1 | 10 | <---> | DN-R35SAL2-2 | 2 | <---> |
| | DN-R35SAL1-2 | 2 | <---> | | | |
| Aluminum DIN Rail Specifications | | | | | | |
| Description | Aluminum, slotted, 3'3" (1 m) length, 35 mm (1.38 in) wide, 10 mm (0.39 in) high | | | Aluminum, slotted, 3'3" (1 m) length, 35 mm (1.38 in) wide, 58 mm (2.28 in) high | | |
| Plating | Galvanic zinc plating, non-anodized finish | | | | | |
| International Standards | DIN 50960, RoHS | | | | | |
| Suggested Mounting Screw Type | #10-32 or M5 | | | | | |

DINnectors Accessories



Dimensions mm [inches]

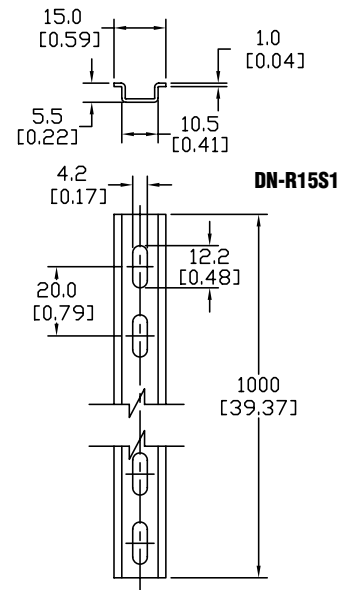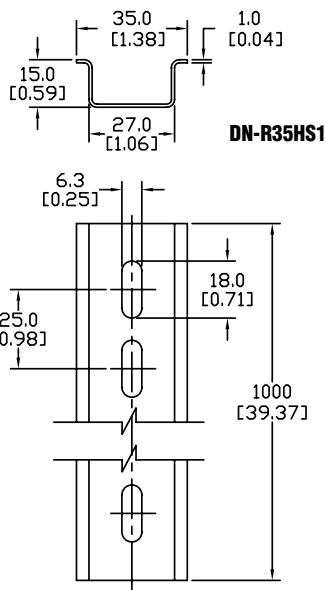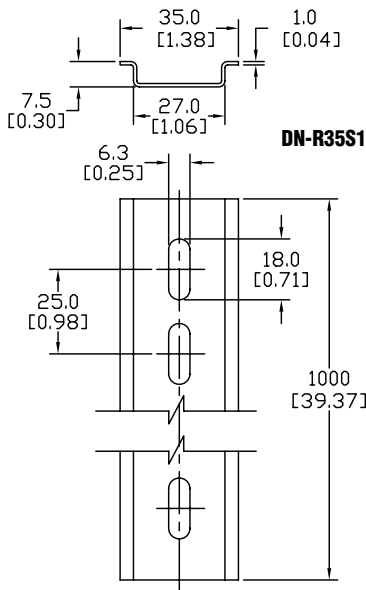

**DN-R35SAL1
DN-R35SAL1-2**

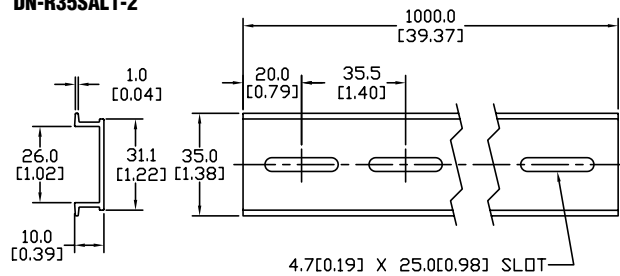

DN-R35SAL2-2

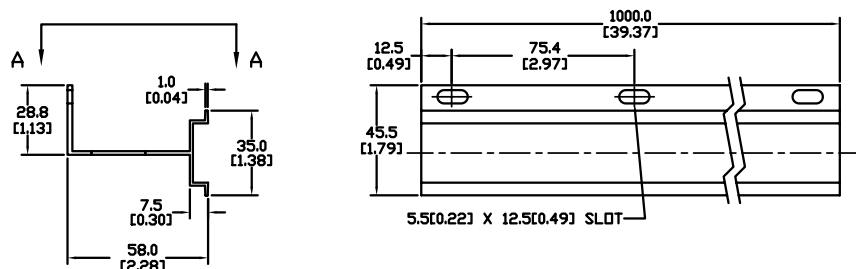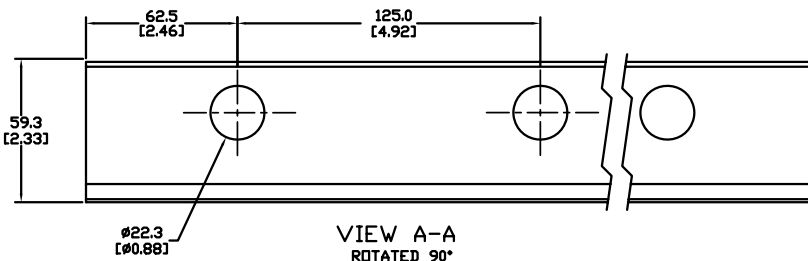

DINnectors Brackets and Mounting Clips

DIN rail support brackets

- Angled support brackets raise and tilt mounting rails 30 degrees from mounting surface for easier wiring
- DN-ASB1 plated steel support bracket
- DN-ASB2-10 cold-rolled steel treated with galvanic zinc plating and passivation

DIN rail mounting clips

- Snap small devices not made for mounting onto 35mm DIN rails
- Zinc plated steel

| DIN Rail Support Brackets and Mounting Clips | | | |
|--|---|---------|------------|
| Part Number | Description | Pcs/Pkg | Price Each |
| DN-ASB1 | 30° angled DIN rail support bracket (M6-1.0 screws not included) | 50 | <---> |
| DN-ASB2-10 | 30° angled DIN rail support bracket (M6-1.0 screws included) | 10 | <---> |
| DN-SSB25-10 | 1" (25 mm) DIN rail support bracket (M6-1.0 screws included) | 10 | <---> |
| DN-SSB50-10 | 2" (50 mm) DIN rail support bracket (M6-1.0 screws included) | 10 | <---> |
| DN-SSB70-10 | 2.75" (70 mm) DIN rail support bracket (M6-1.0 screws included) | 10 | <---> |
| DN-SSB90-10 | 3.5" (90 mm) DIN rail support bracket (M6-1.0 screws included) | 10 | <---> |
| DN-CLIP-FM4 | DIN rail mounting clip with M4 x 0.7 mm threaded hole (Screws not included) | 40 | <---> |
| DN-CLIP-FM4-5 | | 5 | <---> |
| DN-CLIP-FM5 | DIN rail mounting clip with M5 x 0.8 mm threaded hole (Screws not included) | 40 | <---> |
| DN-CLIP-FM5-5 | | 5 | <---> |



DN-ASB1



DN-ASB2-10



DN-SSB25-10



DN-SSB50-10



DN-SSB70-10



DN-SSB90-10






**DN-CLIP-FM4
DN-CLIP-FM4-5**





**DN-CLIP-FM5
DN-CLIP-FM5-5**

DINnectors Brackets and Mounting Clips

Dimensions mm [inches]

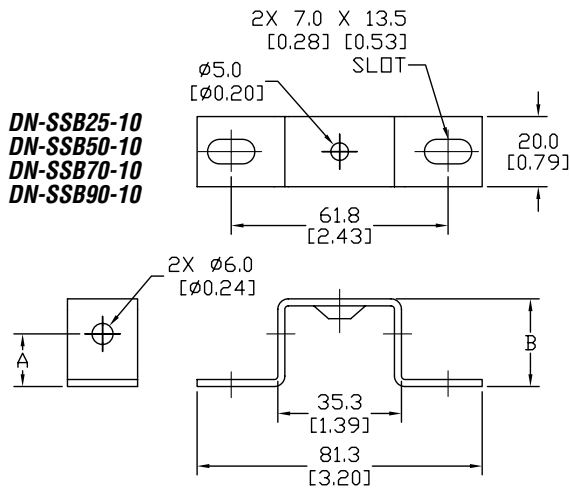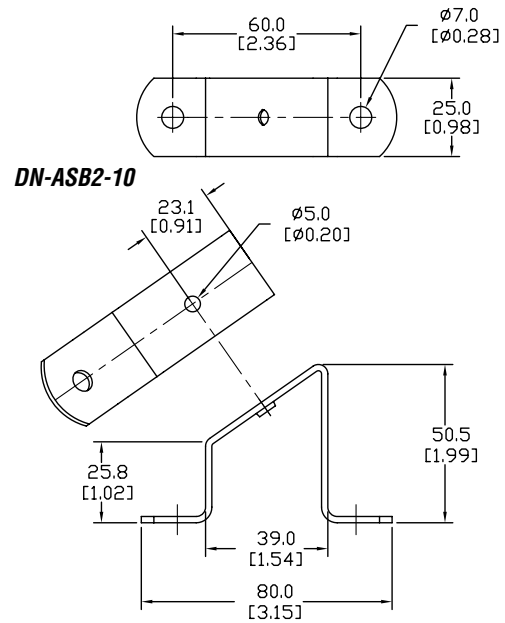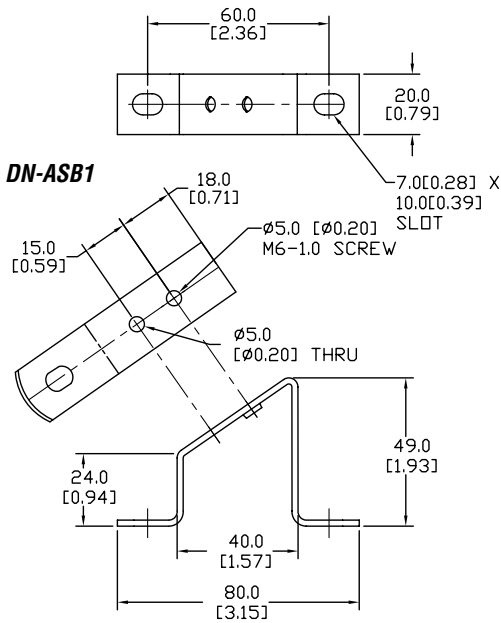

| DIN Rail Support Brackets | | |
|---------------------------|----------------------|----------------------|
| Part Number | DIM A mm [inches] | DIM B mm [inches] |
| DN-SSB25-10 | 15.0 [0.59] | 25.0 [0.98] |
| DN-SSB50-10 | 40.0 [1.58] | 50.0 [1.97] |
| DN-SSB70-10 | 60.0 [2.36] | 70.0 [2.76] |
| DN-SSB90-10 | 80.0 [3.15] | 90.0 [3.54] |

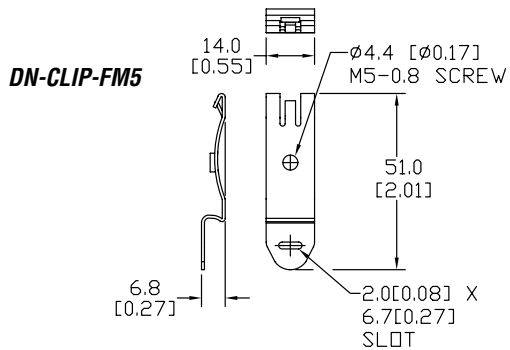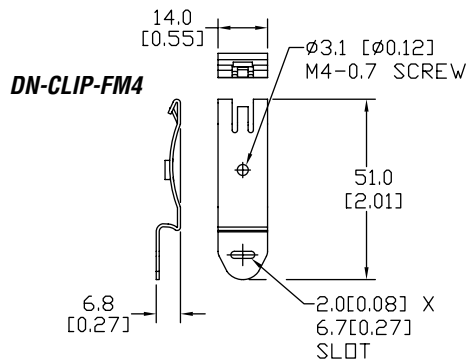

DINnectors Accessories

Jumpers






Multi-pole jumper bars for DINnector terminal blocks



| Multi-pole Jumper Bars | | | | | | | |
|------------------------|-----------------|---------|----------------|------------------|---|---------|-------|
| Part Number | Number of Poles | Voltage | Current Rating | Insulation Color | Works with Terminal Block Series | Pcs/Pkg | Price |
| DN-2J2Y | 2 | 600V | 25A | Orange | DN-T12-A, DN-EMX, DN-Q12-A, DN-QD12-A, DN-QEMX, DN-QKBD12-A | 100 | <--> |
| DN-2J4Y | 2 | | | Yellow | DN-T10-A, DN-D10-A, DN-M10-A, DN-Q10-A | 100 | <--> |
| DN-2J6Y | 2 | | 30A | Green | DN-Q8-A | 100 | <--> |
| DN-2J6 | 2 | | 65A | --- | DN-T6 | 100 | <--> |
| DN-2JL14B-A | 2 | 300V | 20A | Blue | DN-TL-A | 100 | <--> |
| DN-2JL14-A | 2 | | | Red | DN-TL-A | 100 | <--> |
| DN-3J2Y | 3 | 600V | 25A | Orange | DN-T12-A, DN-EMX, DN-Q12-A, DN-QD12-A, DN-QEMX, DN-QKBD12-A | 100 | <--> |
| DN-3J4Y | 3 | | | Yellow | DN-T10-A, DN-D10-A, DN-M10-A, DN-Q10-A | 100 | <--> |
| DN-3J6Y | 3 | | 30A | Green | DN-Q8-A | 100 | <--> |
| DN-3J6 | 3 | | 65A | --- | DN-T6 | 100 | <--> |
| DN-3JL14B-A | 3 | 300V | 20A | Blue | DN-TL-A | 100 | <--> |
| DN-3JL14-A | 3 | | | Red | DN-TL-A | 100 | <--> |
| DN-4J6 | 4 | 600V | 65A | --- | DN-T6 | 100 | <--> |
| DN-12J6Y | 12 | 600V | 30A | Green | DN-Q8-A | 10 | <--> |
| DN-12JL14B-A | 12 | 300V | 20A | Blue | DN-TL-A | 10 | <--> |
| DN-12JL14-A | 12 | | | Red | DN-TL-A | 10 | <--> |
| DN-24J2Y | 24 | 600V | 25A | Yellow | DN-T12-A, DN-EMX, DN-Q12-A, DN-QD12-A, DN-QEMX, DN-QKBD12-A | 5 | <--> |
| DN-24J4Y | 24 | | | Yellow | DN-T10-A, DN-D10-A, DN-M10-A, DN-Q10-A | 5 | <--> |
| DN-24J8 | 24 | | 50A | Green | DN-T8 | 5 | <--> |
| DN-55J6 | 55 | | 65A | --- | DN-T6 | 1 | <--> |


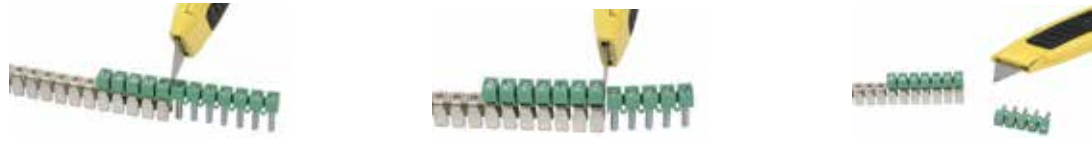



Dimensions

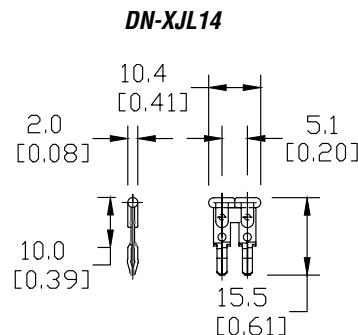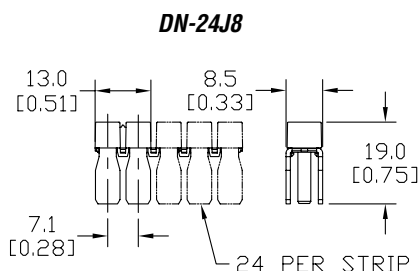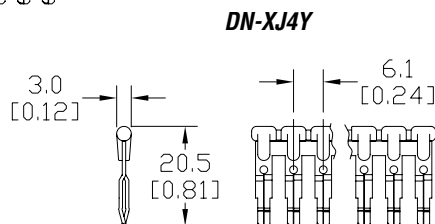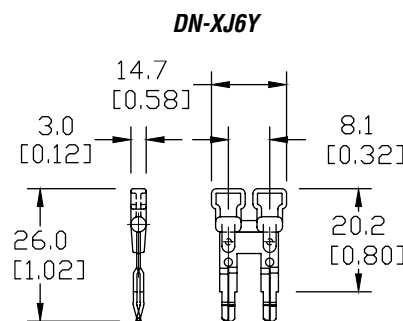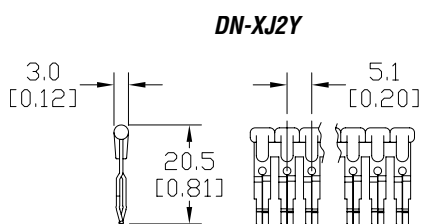mm [inches]



DINnectors Accessories

Modifying a DN-24J8 jumper bar to the required number of poles

- Place the insulating part into the jumper bar and insert screws, based on number of poles required. (For instance, in the following example, 5 poles are required). Click into place.
 
- Using a cutting tool, cut the insulating part at the edge of the jumper bar (see below).
 
- Hold the metal jumper bar and insulating jumper with two hands, placing fingers to the left and right of the pole you wish to cut, repeatedly flexing up and down (1 or 2 times should be sufficient) until the jumper bar and insulating jumper break in two.
 
- Remove the small remaining piece of jumper (see below). This is important to ensure appropriate insulation distance in the case of contiguously applied jumpers in sequence. This step also facilitates the placement of a separator terminal if the bridge is positioned as the last terminal of a group.
 
- The jumpers now are ready to be screwed onto DN-T8 series terminal blocks.
 

Cutting Tool

| Cutting Tool for J8 EURO Jumpers | | | |
|----------------------------------|---|-------------|-------|
| Part Number | Description | Pcs/ Pkg | Price |
| DN-J2CUT | Cutting tool for DN-2J2Y, DN-3J2Y and DN-24J2Y jumpers. Cuts jumper and maintains protective covering | 1 | <---> |
| DN-J4CUT | Cutting tool for DN-2J4Y, DN-3J4Y and DN-24J4Y jumpers. Cuts jumper and maintains protective covering | 1 | <---> |



DN-J2CUT




DN-J4CUT

DINnectors Accessories

Terminal Plugs



DN-xxPLUG

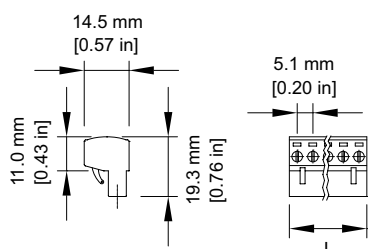

Note: Dimensions are in mm [inches]

| Accessories – Terminal Plugs | | | | |
|------------------------------|-----------------|-----------------------|---------|-----------|
| Plugs* Part Number | Number of Poles | Length | Pcs/Pkg | Price/Pkg |
| DN-2PLUG | 2 | L = 0.40 in [10.2 mm] | 200 | <---> |
| DN-3PLUG | 3 | L = 0.60 in [15.2 mm] | 200 | <---> |
| DN-4PLUG | 4 | L = 0.80 in [20.3 mm] | 100 | <---> |
| DN-5PLUG | 5 | L = 1.00 in [25.4 mm] | 100 | <---> |
| DN-6PLUG | 6 | L = 1.20 in [30.5 mm] | 100 | <---> |
| DN-7PLUG | 7 | L = 1.40 in [35.6 mm] | 50 | <---> |
| DN-8PLUG | 8 | L = 1.60 in [40.6 mm] | 50 | <---> |
| DN-9PLUG | 9 | L = 1.80 in [45.7 mm] | 50 | <---> |
| DN-10PLUG | 10 | L = 2.00 in [50.8 mm] | 50 | <---> |
| DN-11PLUG | 11 | L = 2.20 in [55.9 mm] | 50 | <---> |
| DN-12PLUG | 12 | L = 2.40 in [61.0 mm] | 50 | <---> |


| Terminal Plugs Ratings | |
|--------------------------|---|
| Voltage/Current | 300V, 12A |
| Wire Gauge | 14–22 AWG, CU only |
| Torque | Tightening Torque: 4.5 lb-in [0.51 Nm] |
| Usage Temperature | Ambient air temperature: -4°F to 221°F (-20°C to 105°C) Relative humidity: 50% max at 104°F (40°C); 90% max at 68°F (20°C) |
| Agency Approvals | UL file #: E179129 |

* DN-xxPLUGs fit all DN-EMXxx & DN-QEMXxx plug-in terminal blocks

Disconnect blade



DN-DIS-BLADE

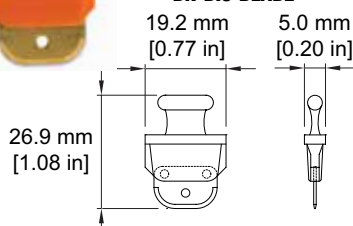


| Disconnect Blade | | | |
|---------------------|--|---------|-------|
| Part Number | Description | Pcs/Pkg | Price |
| DN-DIS-BLADE | Use instead of DN-SUPP-x for DN-FE or as replacement for DN-DIS. | 50 | <---> |


End Brackets




| End Brackets | | | |
|---------------------|---|---------|-----------|
| Part Number | Description | Pcs/Pkg | Price/Pkg |
| DN-EB15 | Terminal block end stop 7mm width screw clamping. Gray | 100 | <---> |
| DN-EB15MN | | 20 | <---> |
| DN-EB35 | Terminal block end stop 9mm width screw clamping. Gray | 50 | <---> |
| DN-EB35MN | | 20 | <---> |
| DN-EB35-A | Terminal block end stop 6mm width screw clamping. Black | 50 | <---> |
| DN-EB35-A-10 | | 10 | <---> |
| DN-QEB35 | Terminal block end stop 6mm width screwless clamping. Black | 50 | <---> |
| DN-QEB35-10 | | 10 | <---> |




DN-EB15



DN-EB35-A



DN-EB35



DN-QEB35

For more information on accessories, see the "DINnectors Accessories" section of this chapter.

DINnectors Accessories

End Covers

Certain end covers can be used with multiple terminal block parts to cover and insulate the open side, or to put more space between adjacent blocks.

| DINnector End Covers | | | | |
|----------------------|---|----------------------------------|---------|-------|
| Part Number | Description | Works with terminal block series | Pcs/Pkg | Price |
| DN-EC1210 | Covers open side of DN-T12-A and DN-T10-A series terminal blocks | DN-T10-A, DN-T12-A | 100 | <--> |
| DN-EC1210MN | | | 25 | <--> |
| DN-EC86 | Covers open side of DN-T8 and DN-T6 series terminal blocks | DN-T8, DN-T6 | 100 | <--> |
| DN-EC86MN | | | 25 | <--> |
| DN-EC4 | Covers open side of DN-T4 series terminal blocks | DN-T4 | 50 | <--> |
| DN-EC1/0 | Covers open side of DN-T1/0 series terminal blocks | DN-T1/0 | 50 | <--> |
| DN-DEC10 | Covers open side of DN-D10 series double-level terminal blocks | DN-D10 | 100 | <--> |
| DN-EC14 | Covers open side of DN-TL14-A series terminal blocks | DN-TL14-A | 25 | <--> |
| DN-EC14S | Covers open side of DN-TL14S-A series terminal blocks | DN-TL14S-A | 25 | <--> |
| DN-ECM10 | Covers open side of DN-M10-A series terminal blocks | DN-M10-A DN-M10B-A | 100 | <--> |
| DN-ECM10MN | | | 25 | <--> |
| DN-ECKBD | Covers open side of DN-KBD12 series disconnect blocks | DN-KBD12 | 100 | <--> |
| DN-EMXM1EC1 | Covers open side of DN-EMXM1 and DN-QEMXM1 terminal blocks | DN-EMXM1 DN-QEMXM1 | 25 | <--> |
| DN-EMXM1EC2 | Covers closed side of DN-EMXM1 and DN-QEMXM1 terminal blocks | | 25 | <--> |
| DN-EMXDVEC1 | Covers open side of DN-EMXDV and DN-QEMXDV terminal blocks | DN-EMXDV DN-QEMXDV | 25 | <--> |
| DN-EMXDVEC2 | Covers closed side of DN-EMXDV and DN-QEMXDV terminal blocks | | 25 | <--> |
| DN-FESEP | Covers closed side of DN-FE sockets and DN-DIS disconnects | DN-FE, DN-DIS | 50 | <--> |
| DN-FESEP-10 | | | 10 | <--> |
| DN-QEC12 | Covers open side of DN-Q12-A or DN-QG12-A series screwless terminal blocks | DN-Q12-A | 50 | <--> |
| DN-QEC10 | Covers open side of DN-Q10-A or DN-QG10-A series screwless terminal blocks | DN-Q10-A | 50 | <--> |
| DN-QEC8 | Covers open side of DN-Q8-A or DN-QG8-A series screwless terminal blocks | DN-Q8-A | 50 | <--> |
| DN-QEC12-1-2 | Covers open side of DN-Q12-1-2-A and DN-QKBD12-A series screwless terminal blocks | DN-Q12-1-2-A DN-QKBD12 | 25 | <--> |
| DN-QEC12-2-2 | Covers open side of DN-Q12-2-2-A series screwless terminal blocks | DN-Q12-2-2-A | 25 | <--> |
| DN-QDEC12 | Covers open side of DN-QD12-A series screwless terminal blocks | DN-QD12-A | 25 | <--> |

Spacers






Spacers are used to put more space between adjacent blocks.

| DINnector Spacers | | | | |
|---------------------|---|----------------------------------|---------|-------|
| Part Number | Description | Works with terminal block series | Pcs/Pkg | Price |
| DN-S1210 | Spacer for DN-T12-A and DN-T10-A series terminal blocks | DN-T10-A, DN-T12-A | 100 | <--> |
| DN-S1210MN | | | 25 | <--> |
| DN-S86 | Spacer for DN-T8 and DN-T6 series terminal blocks | DN-T8, DN-T6 | 100 | <--> |
| DN-EMXM1SPA1 | Spacer for single-level plug-in terminal blocks | DN-EMXM1, DN-QEMXM1 | 25 | <--> |
| DN-EMXDVSPA1 | Spacer for double-level plug-in terminal blocks | DN-EMXDV, DN-QEMXDV | 25 | <--> |
| DN-FESPA | Spacer for DN-FE sockets and DN-DIS disconnects | DN-FE, DN-DIS | 50 | <--> |
| DN-FESPA-10 | | | 10 | <--> |











DINnectors Accessories

| DINector End Covers and Spacers Dimensions | | | |
|--|-------------------|-------------------|------------------|
| Part Number | Length | Height | Thickness |
| DN-EC1210 | 44 mm [1.73 in] | 35 mm [1.38 in] | 1.5 mm [0.06 in] |
| DN-EC1210MN | | | |
| DN-S1210 | | | |
| DN-S1210MN | 55 mm [2.17 in] | 44 mm [1.73 in] | |
| DN-EC86 | | | |
| DN-EC86MN | 50 mm [1.97 in] | 43 mm [1.69 in] | |
| DN-S86 | | | |
| DN-EC4 | | | |
| DN-EC1/0 | 62 mm [2.44 in] | 60 mm [2.36 in] | |
| DN-DEC10 | 72 mm [2.80 in] | 55 mm [2.17 in] | |
| DN-EC14 | 78 mm [3.08 in] | 55 mm [2.17 in] | |
| DN-EC14S | 55 mm [2.17 in] | 50 mm [1.97 in] | |
| DN-ECM10 | 32 mm [1.26 in] | 27 mm [1.06 in] | |
| DN-ECM10MN | | | |
| DN-ECKBD | 52 mm [2.05 in] | 34.5 mm [1.36 in] | |
| DN-EMXM1EC1 | as shown | | |
| DN-EMXM1EC2 | | | |
| DN-EMXDVEC1 | | | |
| DN-EMXDVEC2 | | | |
| DN-EMXDVSPA1 | | | |
| DN-EMXM1SPA1 | | | |
| DN-FESPA | | | |
| DN-FESPA-10 | | | |
| DN-FESEP | | | |
| DN-FESEP-10 | | | |
| DN-QEC12 | 50 mm [1.97 in] | 23 mm [0.9 in] | 1.5 mm [0.06 in] |
| DN-QEC10 | 57.4 mm [2.26 in] | 33.6 mm [1.32 in] | |
| DN-QEC8 | 63 mm [2.48 in] | 38.5 mm [1.52 in] | |
| DN-QEC12-1-2 | 68.5 mm [2.70 in] | 28.5 mm [1.12 in] | |
| DN-QEC12-2-2 | 87.5 mm [3.44 in] | 28.5 mm [1.12 in] | |
| DN-QDEC12 | 98 mm [3.86 in] | 37 mm [1.46 in] | |

**DN-EC1210, DN-EC1210MN
DN-EC86, DN-EC86MN DN-EC4,
DN-EC1/0, DN-ECKBD, DN-S1210,
DN-S1210MN, DN-S86**




**DN-QEC12, DN-QEC10,
DN-QEC8, DN-QEC12-1-2,
DN-QEC12-2-2**



Marking Accessories



DN-LB (blank)
shown on left



DN-LAB (blank) shown on left;
part of DN-LA100 on right



DN-LTA marker shown top; **DN-LT60 marker**
shown middle;
DN-LTGND shown bottom


DN-L

- **Fits terminal block types:** All except, Screwless DINnectors, DN-T12-A, DN-M10-A, DN-MG, and DN-TL series
- **Material:** Thermoplastic with heat embossed black print

Note:

1. The marking sequence of 50 tags (i.e. 101-150) is printed 10 times in each package of 500 tags.
2. The DN-L tags fit all DINnectors 6mm wide and wider.
3. The DN-L tags fit all DINnectors 6mm wide and wider but will leave a gap between tags on blocks wider than 6mm.

Dimensions



| Marking Sequence | Part# | Pcs/Pkg | Price |
|--|----------------|---------|-------|
| 1-50 | DN-L50 | 500 | <---> |
| 51-100 | DN-L100 | 500 | <---> |
| 101-150 | DN-L150 | 500 | <---> |
| 151-200 | DN-L200 | 500 | <---> |
| 201-250 | DN-L250 | 500 | <---> |
| 251-300 | DN-L300 | 500 | <---> |
| 301-350 | DN-L350 | 500 | <---> |
| 351-400 | DN-L400 | 500 | <---> |
| 401-450 | DN-L450 | 500 | <---> |
| Blank | DN-LB | 500 | <---> |
| L1, L2, L3, L, N, GND, +, -, COM, COM* | DN-LS | 500 | <---> |


DN-QL

- **Fits terminal block types:** Screwless DN-Q series
- **Material:** Thermoplastic with heat embossed black print. Packaged 100 labels per card, and five cards per box.

Note:

1. The marking sequence (i.e. 1-100) is printed five times in each package of 500 tags.

Dimensions



DN-QLS Shown

| Marking Sequence | Part # | Pcs/Pkg | Price |
|-----------------------------------|-----------------|---------|-------|
| 1-100 | DN-QL100 | 500 | <---> |
| 101-200 | DN-QL200 | 500 | <---> |
| 201-300 | DN-QL300 | 500 | <---> |
| 301-400 | DN-QL400 | 500 | <---> |
| 401-500 | DN-QL500 | 500 | <---> |
| Blank Tags | DN-QLB | 500 | <---> |
| L1, L2, L3, L, N, +, -, COM, COM* | DN-QLS | 500 | <---> |


DN-LA

- **Fits terminal block types:** DN-T12-A series
- **Material:** Thermoplastic with heat embossed black print

Note:

1. The marking sequence (i.e. 1-100) is printed five times in each package of 500 tags.
2. The DN-T12-A series is 5mm wide, so the 6mm wide DN-L tags do not fit these blocks.
3. The DN-LA tags fit all DINnectors 5mm wide and wider but will leave a gap between tags on blocks wider than 5mm.

Dimensions



| Marking Sequence | Part# | Pcs/Pkg | Price |
|--|-----------------|---------|-------|
| 1-100 | DN-LA100 | 500 | <---> |
| 101-200 | DN-LA200 | 500 | <---> |
| 201-300 | DN-LA300 | 500 | <---> |
| 301-400 | DN-LA400 | 500 | <---> |
| Blank Tags | DN-LAB | 500 | <---> |
| L1, L2, L3, L, N, GND, +, -, COM, COM* | DN-LAS | 500 | <---> |


DN-LAT

- **Fits terminal block types:** Triple level DN-TL14
- **Material:** Thermoplastic with heat embossed black print

Note:

1. The marking sequence (i.e. 1-100) is printed five times in each package of 500 tags.

Dimensions



| Marking Sequence | Part # | Pcs/Pkg | Price |
|-----------------------------------|--------------------|---------|-------|
| 1-100 | DN-LAT100-A | 500 | <---> |
| 101-200 | DN-LAT200-A | 500 | <---> |
| 201-300 | DN-LAT300-A | 500 | <---> |
| 301-400 | DN-LAT400-A | 500 | <---> |
| 401-500 | DN-LAT500-A | 500 | <---> |
| 501-600 | DN-LAT600-A | 500 | <---> |
| Blank Tags | DN-LATB-A | 500 | <---> |
| L1, L2, L3, L, N, +, -, COM, COM* | DN-LATS-A | 500 | <---> |


DN-LT

- **Fits terminal block types:** All except Screwless DINnectors (see DN-QL series)
- **Material:** Thermoplastic with heat embossed black print

Note:

1. These marking tags allow the flexibility of creating custom marking sequences on site.
2. The DN-M10-A support a maximum of three digits (tags), while other DINnectors support up to four digits (tags)

Dimensions



| Marking Sequence | Part# | Pcs/Pkg | Price |
|------------------|------------------|---------|-------|
| 1-5 | DN-LT15 | 100 | <---> |
| 6-0 | DN-LT60 | 100 | <---> |
| 1 | DN-LT1 | 100 | <---> |
| 2 | DN-LT2 | 100 | <---> |
| 3 | DN-LT3 | 100 | <---> |
| 4 | DN-LT4 | 100 | <---> |
| 5 | DN-LT5 | 100 | <---> |
| 6 | DN-LT6 | 100 | <---> |
| 7 | DN-LT7 | 100 | <---> |
| 8 | DN-LT8 | 100 | <---> |
| 9 | DN-LT9 | 100 | <---> |
| 0 | DN-LT0 | 100 | <---> |
| Unprinted | DN-LTBLNK | 100 | <---> |
| A | DN-LTA | 100 | <---> |
| B | DN-LTB | 100 | <---> |
| C | DN-LTC | 100 | <---> |
| D | DN-LTD | 100 | <---> |
| E | DN-LTE | 100 | <---> |
| F | DN-LTF | 100 | <---> |
| G | DN-LTG | 100 | <---> |
| H | DN-LTH | 100 | <---> |
| I | DN-LTI | 100 | <---> |
| J | DN-LTJ | 100 | <---> |
| K | DN-LTK | 100 | <---> |
| L | DN-LTL | 100 | <---> |
| M | DN-LTM | 100 | <---> |
| N | DN-LTN | 100 | <---> |
| - | - | - | - |
| P | DN-LTP | 100 | <---> |
| Q | DN-LTQ | 100 | <---> |
| R | DN-LTR | 100 | <---> |
| S | DN-LTS | 100 | <---> |
| T | DN-LTT | 100 | <---> |
| U | DN-LTU | 100 | <---> |
| V | DN-LTV | 100 | <---> |
| W | DN-LTW | 100 | <---> |
| X | DN-LTX | 100 | <---> |
| Y | DN-LTY | 100 | <---> |
| Z | DN-LTZ | 100 | <---> |
| ⊕ | DN-LTGND | 100 | <---> |
| + | DN-LTPOS | 100 | <---> |
| - | DN-LTNEG | 100 | <---> |
| ~ | DN-LTAC | 100 | <---> |
| = | DN-LTDC | 100 | <---> |

DINnectors Accessories – Marking

Terminal Marking Accessories



DN-EMLBL1



DN-EMLBL2




DN-EMLBL3

| Part # | Description | For Use With | Pcs/Pkg | Price Each |
|------------------|------------------------|--|---------|------------|
| DN-EMLBL1 | Blank labels | DN-EMPEG1 pin protectors for DN-xEMXxx plug-in terminal blocks | 100 | <---> |
| DN-EMLBL2 | Labels printed 1 – 12 | | 100 | <---> |
| DN-EMLBL3 | Labels printed 13 – 24 | | 100 | <---> |



DN-MTA marking tag adapter

DN-MTA dimensions

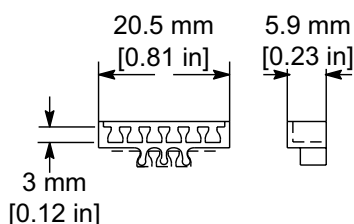

| Part# | Description | Pcs/Pkg | Price Each |
|---------------|--|---------|------------|
| DN-MTA | Marking tag adapter holds up to six DN-LT tags | 50 | <---> |

Note: DN-MTA adapter does not fit DN-T12-A terminal blocks.

Marking Pen – for terminal and wire marking tags

- Permanent
- Smudge-proof
- Waterproof
- Weatherproof
- Lightfast (won't fade)
- Dries in seconds (excellent for left-handed users)
- Dry-safe (pen can be left uncapped for days without drying out)
- Low odor ink

| Part# | Description | Pcs/Pkg | Price Each |
|--------------|---------------------------------|---------|------------|
| DN-MP | Indelible black ink marking pen | 1 | <---> |



Marking pen

Wire Marking Accessories



DN-WMTAG1 wire tags & DN-WM-x wire tag holders

| Part # | Description | For Use With | Pcs/Pkg | Price Each |
|------------------|---|------------------------------|---------|------------|
| DN-WMTAG1 | Wire tag – blank | all DN-WM-x wire tag holders | 525 | <---> |
| DN-WM-1 | Wire tag holder, clear, 12 mm length, 0.051–0.118 in diameter; for 22–16 AWG wire | DN-WMTAG1 | 200 | <---> |
| DN-WM-2 | Wire tag holder, clear, 12 mm length, 0.098–0.196 in diameter; for 16–11 AWG wire | | 200 | <---> |
| DN-WM-3 | Wire tag holder, clear, 12 mm length, 0.157–0.393 in diameter; for 13–5 AWG wire | | 100 | <---> |
| DN-WM-4 | Wire tag holder, clear, 12 mm length, 0.314–0.629 in diameter; for 5 AWG wire | | 100 | <---> |