TU Series Ultrasonic Sensors



M30 (30 mm) plastic – PNP or Analog Output

- High resolution
- PNP output model with adjustable sensitivity
- Complete overload protection
- IP67 rated
- LED status indicator on PNP models
- · Purchase cable separately
- · Lifetime warranty




TU Series Ultrasonic PNP Output Sensor Selection Chart							
Part Number		Output State	Logic	Connection	Wiring		
<i>TU1-C0-0E</i> \$	\$302.00	300 to 2500 mm (11.81-98.43 in)	NO	PNP	M12 (12 mm) connector	Diagram 1	

TU Series Ultrasonic Analog Output Sensor Selection Chart						
Part Number Price Sensing Range Output Connection					Wiring	
TU1-C1-0E	\$302.00	300 to 2500 mm (11.81-98.43 in)	0 to 10 VDC	M12 (12 mm) connector	Diagram 2	

Dir	nens	ions
mm	[inches]	

Su	Specifications Specification Specification Specification Specification Specification Specification Specificatio						
Mounting Type	TU1-CO-0E	TU1-C1-0E					
Nominal Sensing Distance	300 to 2500 mm (11.81-98.43 in)	300 to 2500 mm (11.81-98.43 in)					
Operating Distance	NA	NA					
Output Type	PNP / NO	0 to 10 VDC					
Operating Voltage	19 to 3	30 VDC					
No-load Supply Current	≤3£	5 mA					
Operating (Load) Current	≤500 mA	≤5 mA					
Off-state (Leakage) Current	≤1	0 μΑ					
Voltage Drop	≤2.5 volts	NA					
Switching Frequency	1 Hz	NA					
Differential Travel	±2.0% NA						
Repeat Accuracy	0.2%	±2 mm					
Linearity Error	-	≤0.3%					
Ultrasonic Frequency	130 kHz						
Ultrasonic Beam Angle	8°						
x. Response Time - 100 ms							
Time Delay Before Availability (tv)	≤1 s						
Control Input	Hold ,	/ Sync					
Sensitivity Adjustment	Yes	-					
Reverse Polarity Protection	Yı	es					
Short-Circuit Protection	Yes (switch auto-resets a	fter overload is removed)					
Operating Temperature	-25° to +70°C	(-13° to 158°F)					
Temperature Compensation	Yı	es					
Protection Degree	IEC	IP67					
Indication/Switch Status	Yellow (output energized)	NA					
Housing Material	Polybutylene Ter	· · · · · · · · · · · · · · · · · · ·					
Tightening Torque	3 Nm (2.21 lb-ft)						
Weight (connector)	124 g (4.37 oz)						
Connection	M12 (12 mr	n) connector					
Agency Approvals	CE, UL listed	file E187310					



Wiring Diagrams

Diagram 1*






Diagram 2*




*Note: Control wire can be used to inhibit sensor or to synchronize with another sensor.

Characteristic Curves (analog)



Detection Area



Possible detection of large object

Connector

M12 connector



Must be used with 2M or 7M cable


tSEN-109 Proximity Sensors 1 - 8 0 0 - 6 3 3 - 0 4 0 5

Accessories for 30mm Sensors

Axial Mounting Bracket

Mounting bracket, axial, zinc-plated steel. For use with 30mm sensors. Has two mounting holes (use 5mm screws) and allows the rotation of an optical axis for rightbeam-angle-adapter sensors. Hexagonal nuts not included.

Accessories for 30mm Sensors					
Part Number	Price	Description	Weight [lb]		
ST30A	\$2.25	Mounting bracket, axial, zinc-plated steel. For use with 30mm sensors. 1/pk.	0.18		

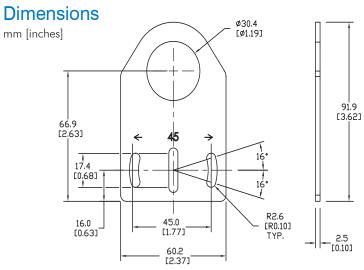




ST30A

Right-angle Mounting Bracket

Mounting bracket, right-angle, zinc-plated steel. For use with 30mm sensors. Has two mounting holes (use 5mm screws) and allows the rotation of an optical axis for axial sensors. Hexagonal nuts not included.

Accessories for 30mm Sensors				
Part Number	Part Number Price Description			
ST30C	\$2.25	Mounting bracket, right angle, zinc-plated steel. For use with 30mm sensors. 1/pk.	0.18	

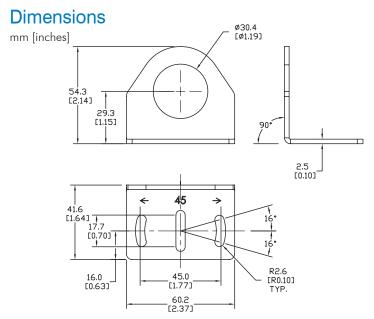



See our website: www.AutomationDirect.com for complete engineering drawings


tSEN-306 Sensor Accessories 1 - 8 0 0 - 6 3 3 - 0 4 0 5

Accessories for 30mm Sensors

Right-angle Mounting Bracket

Mounting bracket, right-angle, 304 stainless steel. For use with 30mm sensors.

Accessories for FW Series Sensors					
Part Number	Price	Description	Weight [lb]		
ST30C6W	\$2.50	Mounting bracket, right angle, 304 stainless steel. For use with 30mm sensors.	0.15		

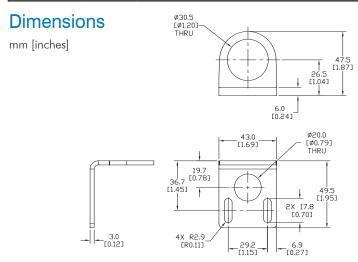




ST30C6W

Right-angle Swivel Mounting Systems

Mounting bracket, right-angle swivel, 360 degree vertical and horizontal adjustment, 12mm rod mount. For use with 30mm sensors. Available in all 304 stainless steel or with an aluminum head with a 304 stainless steel mounting plate.

Accessories for 30mm Sensors							
Part Number	Price	Description	Mounting Head	Mounting Plate	Weight [lb]		
OPT2118	\$9.00	Mounting bracket, right-angle swivel, 360 vertical and horizontal adjustment, aluminum, 12mm rod mount. For use with 30mm sensors.	Aluminum	304 Stainless Steel	0.18		
OPT2119	\$16.00	Mounting bracket, right-angle swivel, 360 vertical and horizontal adjustment, 304 stainless steel, 12mm rod mount. For use with 30mm sensors.	304 Stainless Steel	304 Stainless Steel	0.30		

Note: 304 Stainless steel mounting rods sold separately: OPT2109 (200mm length), OPT2110 (300mm length), and OPT2111 (500mm length).

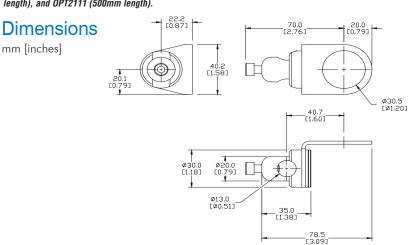



OPT2118, OPT2119

See our website: www.AutomationDirect.com for complete engineering drawings

tSEN-307 Sensor Accessories 1 - 8 0 0 - 6 3 3 - 0 4 0 5

Mounting Rods

Mounting Rods


304 Stainless steel rods for mounting swivel brackets OPT2112 - OPT2127. Available in three lengths: 200mm, 300mm, and 500mm. 12mm diameter.

Mounting Rods for OPT2112-2127 Swivel Mounting Brackets				
Part Number Price Description				
OPT2109	\$10.00	Mounting rod, 12mm diameter, 200mm length, 304 stainless steel.	0.41	
OPT2110	\$12.00	Mounting rod, 12mm diameter, 300mm length, 304 stainless steel.	0.60	
OPT2111	\$16.00	Mounting rod, 12mm diameter, 500mm length, 304 stainless steel.	0.98	



Dimensions

mm [inches]

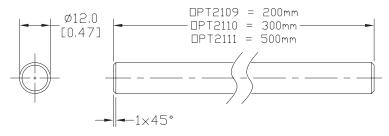


Right-angle Mounting Bracket

Mounting bracket, right-angle, nickel-plated brass. For use with 12mm mounting rods OPT2109, OPT2110 & OPT2111.

Accessories for 12mm Sensors				
Part Number	Part Number Price Description		Weight [lb]	
OPT2108	\$12.00	Mounting bracket, right-angle, nickel-plated brass. For use with 12mm mounting rods OPT2109, OPT2110 & OPT2111.	0.07	

Dimensions

mm [inches]

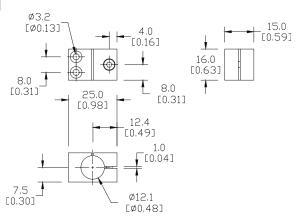



OPT2108

See our website: www.AutomationDirect.com for complete engineering drawings

tSEN-313 Sensor Accessories 1 - 8 0 0 - 6 3 3 - 0 4 0 5