

AC1 Series Inductive Proximity Sensors



Miniature $\Phi 4$ mm stainless steel

- Smooth barrel
- Sixteen models available
- NPN or PNP, NO or NC
- Complete overload protection
- IP67 rated
- Stainless steel construction
- Yellow output LED 360 degree visible
- Lifetime warranty

AC1 Series $\Phi 4$ mm Inductive Prox Selection Chart								
Part Number	Price	Sensing Range	Housing	Output State	Logic	Connection	Wiring	Dimensions
Standard Distance								
AC1-AN-1A	\$23.00	0.8 mm (0.03 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AC1-AP-1A	\$23.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
AC1-AN-1F	\$24.00				NPN	M8 connector	Diagram 3	Figure 2
AC1-AP-1F	\$24.00				PNP	M8 connector	Diagram 4	Figure 2
AC1-CN-1A	\$23.00			NC	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AC1-CP-1A	\$23.00				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
AC1-CN-1F	\$24.00				NPN	M8 connector	Diagram 3	Figure 2
AC1-CP-1F	\$24.00				PNP	M8 connector	Diagram 4	Figure 2
Extended Distance								
AC1-AN-3A	\$26.50	1.5 mm (0.06 in)	Shielded	NO	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AC1-AP-3A	\$26.50				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
AC1-AN-3F	\$27.50				NPN	M8 connector	Diagram 3	Figure 2
AC1-AP-3F	\$27.50				PNP	M8 connector	Diagram 4	Figure 2
AC1-CN-3A	\$26.50			NC	NPN	2 m (6.5') axial cable	Diagram 1	Figure 1
AC1-CP-3A	\$26.50				PNP	2 m (6.5') axial cable	Diagram 2	Figure 1
AC1-CN-3F	\$27.50				NPN	M8 connector	Diagram 3	Figure 2
AC1-CP-3F	\$27.50				PNP	M8 connector	Diagram 4	Figure 2

SEE OUR WEBSITE: WWW.AUTOMATIONDIRECT.COM FOR COMPLETE ENGINEERING DRAWINGS.

Dimensions

mm [inches]

Figure 1


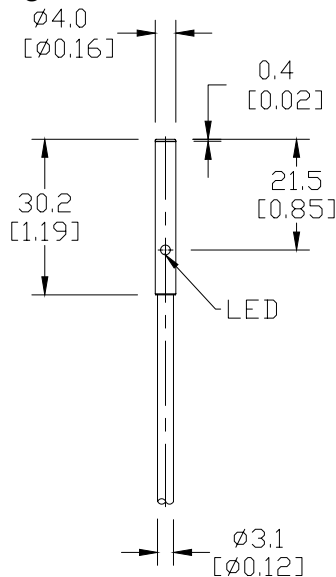


Figure 2

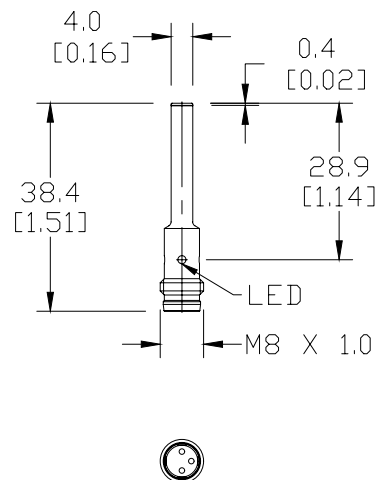

AC1 Series Inductive Proximity Sensors

AC1 Series Specifications		
	Standard Distance	Extended Distance
Mounting Type	Shielded	
Nominal Sensing Distance	0.8 mm (0.031 in)	1.5 mm (0.06 in)
Operating Distance	NA	
Material Correction Factors	See the Material influence table	
Output Type	NPN or PNP/NO or NC/3-wire	
Operating Voltage	10 to 30 VDC	
No-load Supply Current	≤10mA	
Operating (Load) Current	≤100mA	
Off-state (Leakage) Current	≤10 μA	
Voltage Drop	≤1.5 V	
Switching Frequency	7 kHz	
Differential Travel (% of Nominal Distance)	≤10%	
Repeat Accuracy	≤5%	
Ripple	≤10%	
Time Delay Before Availability (tv)	≤50 ms	
Reverse Polarity Protection	Yes	
Short-Circuit Protection	Yes (auto-reset)	
Operating Temperature	-25° to 70°C (-13° to 158° F)	
Protection Degree (DIN 40050)	IP67	
Indication/Switch Status	Yellow output (on energized)	
Housing Material	Stainless Steel	
Sensing Face Material	Polybutylene Terephthalate	
Shock/Vibration	See Proximity Sensor Terminology	
Tightening Torque	NA	
Weight	30g (1.06 oz) (cable version) 4g (0.14 oz) (M8 connector)	
Connection	2m PUR Cable or M8 Connector	
Agency Approvals	CE cULus E187310	

SEE OUR WEBSITE: WWW.AUTOMATIONDIRECT.COM FOR COMPLETE ENGINEERING DRAWINGS.

Wiring diagrams

Diagram 1

NPN Cable


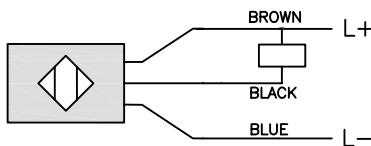


Diagram 2

PNP Cable



Connector



Diagram 3

NPN M8 Connector


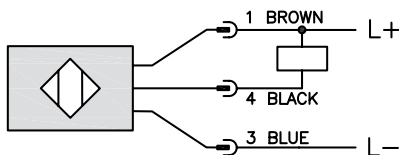


Diagram 4

PNP M8 Connector

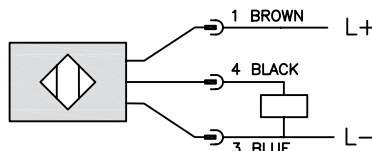

*smooth barrel (no threads)

Accessories for 4mm Sensors


Right-angle Mounting Bracket

Mounting bracket, right-angle, plastic. For use with 4mm sensors.

Accessories for 4mm Sensors			
Part Number	Price	Description	Weight [lb]
OPT2106	\$6.25	Mounting bracket, right-angle, plastic. For use with 4mm sensors.	0.02

Dimensions

mm [inches]

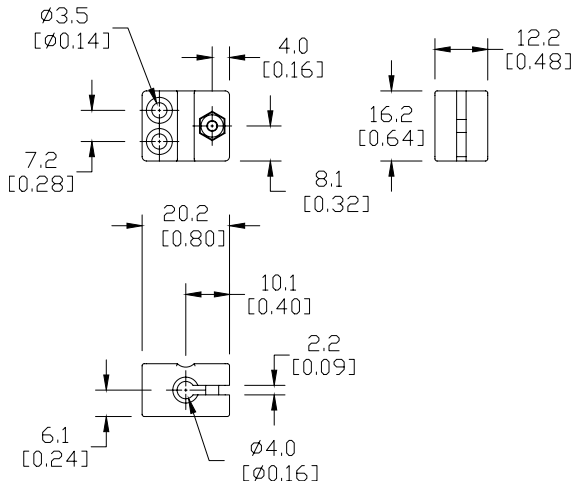

OPT2106

See our website: www.AutomationDirect.com for complete engineering drawings