



Inductive Proximity Sensors PAM Series



PAM-AP-1A



PAM-AP-2H

Tubular M12 (12mm) Stainless Steel – DC

Features


- Nickel-plated brass construction
- Axial cable or M12 quick-disconnect models
- Complete overload protection
- IP67 rated
- LED status indicator
- Mounting hardware included
- Lifetime warranty




Tubular M12 DC Inductive Proximity Sensors PAM Series Selection Chart									
Part Number	Price	Sensing Distance mm [in]	Mounting	Output State	Logic	Connection	Weight g [oz]	Body Size mm [in]	Drawing Link
PAM-AP-1A	\$10.50	2 [0.07]	Flush	N.O.	PNP	PVC, 3-wire pigtail 2m [6.5 ft], 22AWG	90.5 [3.19]	35 [1.37]	PDF
PAM-AP-1H	\$10.50					4-pin M12 quick-disconnect [purchase cable separately]	23.5 [0.82]	45 [0.77]	PDF
PAM-AN-1H	\$10.50				NPN			PDF	
PAM-AP-2A	\$10.50	4 [0.15]	Non-flush	N.O.	PNP	PVC, 3-wire pigtail 2m [6.5 ft], 22AWG	91.4 [3.22]	35 [1.37]	PDF
PAM-AP-2H	\$10.50					4-pin M12 quick-disconnect [purchase cable separately]	23.4 [0.82]	45 [0.77]	PDF
PAM-AN-2H	\$10.50				NPN			PDF	

Wiring Diagrams


PNP Cable

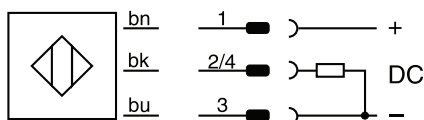

NPN Cable

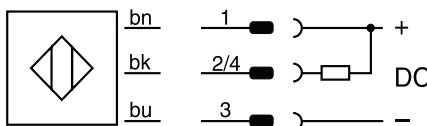

M12 Connector





Inductive Proximity Sensors

PAM Series Specifications

Tubular M12 DC Inductive Proximity Sensors PAM Series Specifications		
Mounting Type	Flush	Non-Flush
Rated Operating Distance	2mm [0.07 in]	4mm [0.15 in]
Assured Operating Distance	$\leq (0.81 \times S_n)$ mm	
Repeat Accuracy	0.1 mm	0.2 mm
Hysteresis	$\leq 20\% S_r$	
Temperature Drift	$\leq 10\% S_r$	
Material Correction Factors	See the Material Influence Table	
Output Type	PNP or NPN, N.O.	
Operating Voltage	10 to 30 VDC	
Residual Ripple	$\leq 20\% U_B$	
Output Current	≤ 200 mA	
Output Voltage Drop	≤ 2.0 V @ 200mA	
Power Consumption (no-load)	≤ 10 mA	
Residual Current	≤ 0.1 mA	
Switching Frequency	3kHz	2kHz
Short-Circuit Protection	Yes	
Reverse Polarity Protection	Yes	
Operating Temperature	-25 to 70°C [-13 to 158°F]	
Protection Degree (DIN 40050)	IP67	
Indication/Switch Status	LED, Yellow Sensing state ($0 \leq s \leq S_r$)	
Mounting	Embeddable	Non-embeddable
Housing Material	Nickel-plated brass	
Sensing Face Material	PBTP (polybutylene terephthalate)	
Shock/Vibration	IEC 60947-5-2	
Agency Approvals	cULus File E328811, CE	

To obtain the most current agency approval information, see the Agency Compliance & Certifications section on the specific part number's web page.

Accessories for 12mm Sensors

Axial Mounting Bracket

Mounting bracket, axial, available in zinc-plated steel or 316L stainless steel. For use with 12mm sensors. Has two mounting holes (use 3mm screws) and allows the rotation of an optical axis for right-angle adapter sensors. Hexagonal nuts not included.

Accessories for 12mm Sensors				
Part Number	Price	Description	Drawing Link	Weight lb [g]
ST12A	\$2.00	Micro Detectors mounting bracket, axial, zinc plated steel. For use with 12mm sensors.	PDF	0.03 [13.6]
ST12A7W	\$7.25	Micro Detectors mounting bracket, axial, 316L stainless steel. For use with 12mm sensors.	PDF	0.03 [13.6]



[ST12A](#)

Right-angle Mounting Bracket

Mounting bracket, right-angle, zinc-plated steel or 316L stainless steel. For use with 12mm sensors. Has two mounting holes (use 3mm screws) and allows the rotation of an optical axis for axial sensors. Hexagonal screws not included.

Accessories for 12mm Sensors				
Part Number	Price	Description	Drawing Link	Weight lb [g]
ST12C	\$2.00	Micro Detectors mounting bracket, right-angle, zinc plated steel. For use with 12mm sensors.	PDF	0.03 [13.6]
ST12C7W	\$7.25	Micro Detectors mounting bracket, right-angle, 316L stainless steel. For use with 12mm sensors.	PDF	0.03 [13.6]



[ST12C](#)

Accessories for 12mm Sensors

Right-angle Mounting Brackets

Mounting bracket, right-angle, fixed insertion stop adjustment, plastic. For use with 12mm sensors. Available with or without fixed insertion stop.



[OPT2102](#), [OPT2103](#)

Accessories for 12mm Sensors				
Part Number	Price	Description	Drawing Link	Weight lb [g]
OPT2102	\$8.00	Wenglor mounting bracket, right-angle, fixed insertion stop adjustment, plastic. For use with 12mm sensors.	PDF	0.05 [22.7]
OPT2103	\$8.00	Wenglor mounting bracket, right-angle, plastic. For use with 12mm sensors.	PDF	0.05 [22.7]

Right-angle Swivel Mounting Systems

Mounting bracket, right-angle swivel, 360 degree vertical and horizontal adjustment, 12mm rod mount. For use with 12mm sensors. Available in all stainless steel or with an aluminum head and stainless steel mounting plate.



[OPT2114](#), [OPT2115](#)

Accessories for 12mm Sensors						
Part Number	Price	Description	Mounting Head	Mounting Plate	Drawing Link	Weight lb [g]
OPT2114	\$11.50	Wenglor mounting bracket, right-angle swivel, 360 degree vertical and horizontal adjustment, aluminum, 12mm rod mount. For use with 12mm sensors.	Aluminum	Stainless steel	PDF	0.14 [63.5]
OPT2115	\$21.00	Wenglor mounting bracket, right-angle swivel, 360 degree vertical and horizontal adjustment, 304 stainless steel, 12mm rod mount. For use with 12mm sensors.	304 Stainless steel	304 Stainless steel	PDF	0.27 [122.5]

Note: 304 stainless steel mounting rods sold separately: [OPT2109](#) (200mm [7.87 in] length), [OPT2110](#) (300mm [11.81 in] length), and [OPT2111](#) (500mm [19.69 in] length).