

RHINO PSB Power Supply Accessories

Buffer Module

The RHINO PSB24-BFM20S buffer module is a cost effective alternative to battery-based backup systems. Utilizing electrolytic capacitors the buffer module is maintenance free and will maintain the output voltage of a 24VDC power supply system for 250 msec minimum with a 20A load and 5 sec minimum with a 1A load. A switch is provided to select the voltage level to start buffering. An inhibit input is available for remote shut-down as well as output signals for remote stand-by and buffering mode indication. The module is housed in a corrosion-resistant aluminum chassis with IP20 terminals and conformal coated circuit board for protection against demanding environments.

Features


- Corrosion-resistant aluminum housing
- Long minimum buffering time of 250ms @ 24V/20A
- Units can be connected in parallel to increase buffering time
- Less than 30 second charging time
- Approved for use in Class I Division 2 hazardous locations
- IP20 wiring terminals
- Overvoltage / Overcurrent / Short Circuit protections
- Three year warranty



Buffer Module	
Part No.	PSB24-BFM20S
Price	\$151.00
Weight	0.76 kg [1.68 lb]
Buffer Module Input Specifications	
Nominal Input Voltage	24VDC
Voltage Range	22.8 to 28.8 VDC (35VDC Max)
Input Current	Charging mode: < 0.6 A; Discharging mode: 20A Max
Input Power	2.5 W average
Maximum Signal Input (Inhibit)	35V / 10mA
Max Inrush Current	<20A
Charging Time	<30sec
Buffer Module Output Specifications	
Nominal Output Voltage	24VDC typ. (depends on V_{in})
Adjustment Range Of The Voltage	22 to 28VDC Switch = "Fix 22V" - Buffering starts if terminal voltage falls below 22V Factory Setting, Switch = " $V_{in} - 1V$ " - Buffering starts if terminal voltage is decreased by >1V
Maximum Output Voltage	35VDC
Output Current	20A max
Buffering Time	250ms Min @ 24V / 20A Load, 5sec Min @ 24V / 1A Load (Refer to Fig. 1)
Maximum Signal Output	35V / 10mA
Signals	Inhibit Signal (I) - "Low" = shuts down buffer module Ready Signal (R) - "High" = buffer module is fully charged or in standby mode Buffering Signal (B) - "High" = Buffer module is discharging or in buffering mode Supply Voltage (+ V_s) - Common + V_s , 35V Max
Noise and Ripple (20MHz)	<200mVpp @ 25°C [77°F] during buffering mode
Parallel Connection	Yes (requires PSB60-REM redundancy module)
Series Connection	No
Protective Device	Transient voltage suppressor (TVS) for signals

RHINO PSB Power Supply Accessories

Figure 1 1 Buffering Time (Typical Values at “V_{in}-1V” Mode)

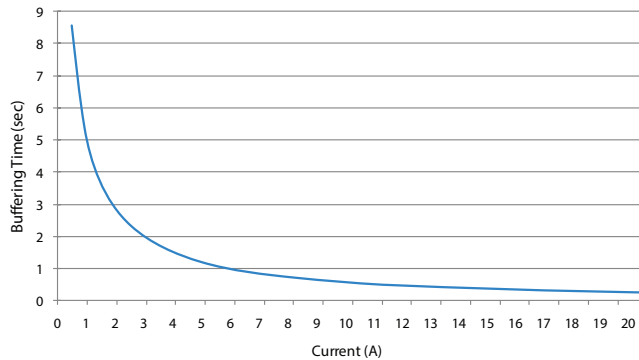

Buffer Module Mechanical Specifications	
Case Cover	Aluminum
LED Indicators	Green LED Off - Unit is discharged or Vin <22VDC Green LED On - Unit is fully charged
Cooling System	Convection
Terminal	Input / Output - M3 x 2 pins (Rated 300V / 30A) Signal - M3 x 5 pins (Rated 300V / 30A)
Wire	Input / Output - AWG 12-10 [0.08-0.10 in]; Torque: 0.72 Nm [6.3 lb-in] Signal - AWG 24-10 [0.02-0.10 in]; Torque: 0.72 Nm [6.3 lb-in]
Buffer Module Environmental Specifications	
Operating Temperature	-25°C to +75°C [-13°F to +167°F]
Storage Temperature	-25°C to +85°C [-13°F to +185°F]
Power De-rating	>70°C [158°F] de-rate power by 5% / °C
Operating Humidity	<95% RH (Non-Condensing)
Operating Altitude	2,500 Meters
Shock Test (Non-Operating)	IEC60068-2-27, 30G (300m/S ²) for a duration of 18ms
Vibration (Non-Operating)	IEC60068-2-6, 10 Hz to 500 Hz @ 30m/S ² (3G peak); 60min per axis for all X, Y, Z direction
Pollution Degree	2
Buffer Module Protection Specifications	
Overvoltage	32V ± 10%
Overload / Overcurrent	30A Max
Short Circuit	No damage
Penetration Protection	>3.5mm (eg. screws, small parts)
Reverse Polarity Protection	Yes
Degree of Protection	IP20
Protection Against Shock	Class I with GND connection

RHINO PSB Power Supply Accessories

Buffer Module Reliability Specifications	
MTBF (at V_{in}-1V Mode)	>2,800,000 hrs. as per Telcordia SR-332 at Standby Mode (Buffer Module in Ready State)
Expected Capacitor Life	10 years (Standby mode @ 40°C)
Buffer Module Safety Standards / Directives	
Electronic Equipment in Power Installations	EN50718 / IEC62103
Electrical Safety (Information Technology Equipment)	UR/cUR recognized to UL60950-1 and CSA C22.2 No. 60950-1 (file no. E198298), CB scheme to IEC60950-1
Industrial Control Equipment	UL/cUL listed to UL508 and CSA C22.2 No. 107.1-01 (file no. E197592) CSA to CSA C22.2 No. 107.1-01 (file no. 249074)
Hazardous Location	cCSAus to CSA C22.2 No. 213-M1987, ANSI / ISA 12.12.01:2007 [Class I, Division 2, Group A,B,C,D T4, Ta = -25°C to +75°C (> +70°C derating)], (file no. 249074)
CE	in conformance with EMC Directive 2004/108/EC and Low Voltage Directive 2006/95/EC
Materials and Parts	RoHS Directive 2011/65/EU Compliant
Galvanic Isolation	Input & Output to Ground - 1.5 KVAC Signal to Ground - 1.5 KVAC
Buffer Module EMC Specifications	
EMC / Emissions	CISPR32, EN55032, EN55011
Component Power Supply for General Use	EN61204-3
Immunity	EN55024, EN61000-6-2
Electrostatic Discharge	EN61000-4-2
Radiated Field	EN61000-4-3
Fast Transient / Burst	EN61000-4-4
Surge	IEC61000-4-5
Conducted	EN61000-4-6
Power Frequency Magnetic Fields	EN61000-4-8
Voltage Dips	EN61000-4-11
Low Energy Pulse Test (Ring Wave)	EN61000-4-12


Note: Product intended to be used as Apparatus with AC-DC Power Supply, EMC compliance to be verified in correspondence to the connected units.

Dimensions

mm [inches]

PSB24-BFM20S


Wiring Connection			
Input		Output	
+	DC+	R	Ready
-	DC+	B	Buffering
I	Inhibit	+Vs	+ Voltage Supply
		⏏	Ground

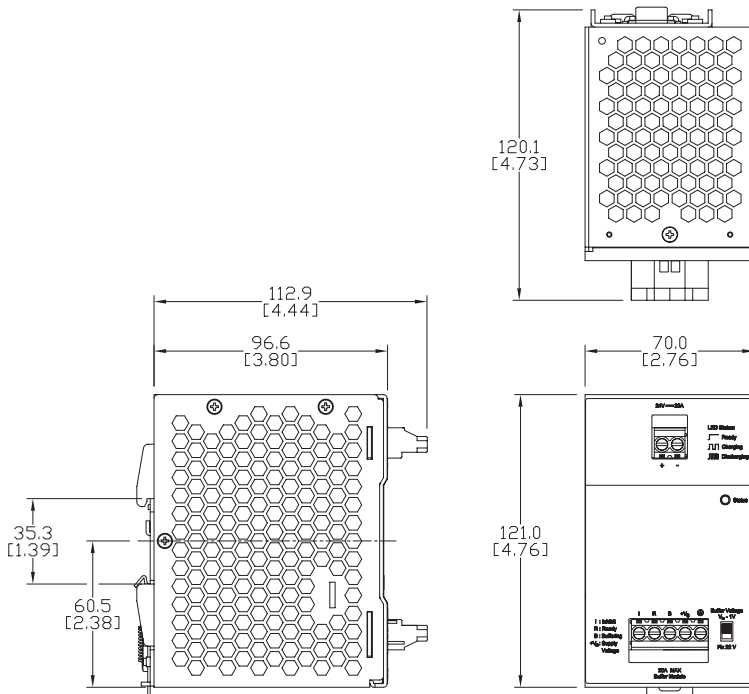


RHINO PSB Power Supply Accessories

Buffering, Ready and Inhibit Signal	
Buffering Output Signal (B)	"High" = PSB24-BFM20S is discharging or in Buffering Mode
Ready Output Signal (R)	"High" = PSB-BFM20S is fully charged or in Standby Mode
Inhibit Input Signal (I)	"Low" = Shuts down Buffer Module
Signal Voltage	+VS: 10-35 VDC
Maximum Signal Current	10mA
Isolation (Signal to Power)	1.5 KVAC

I/O (input/output) Example

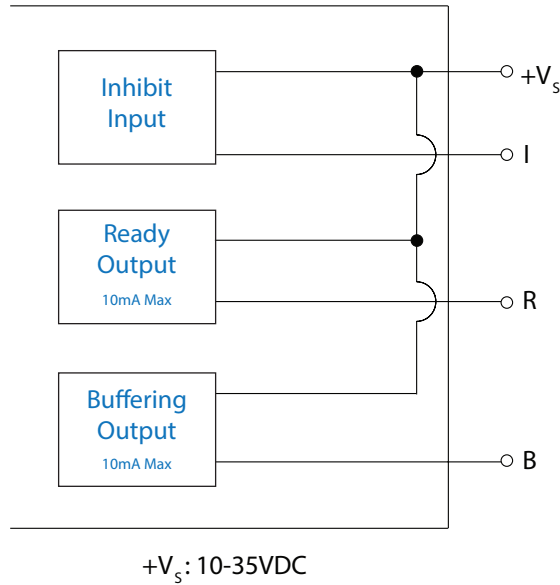


Buffer Module Operations

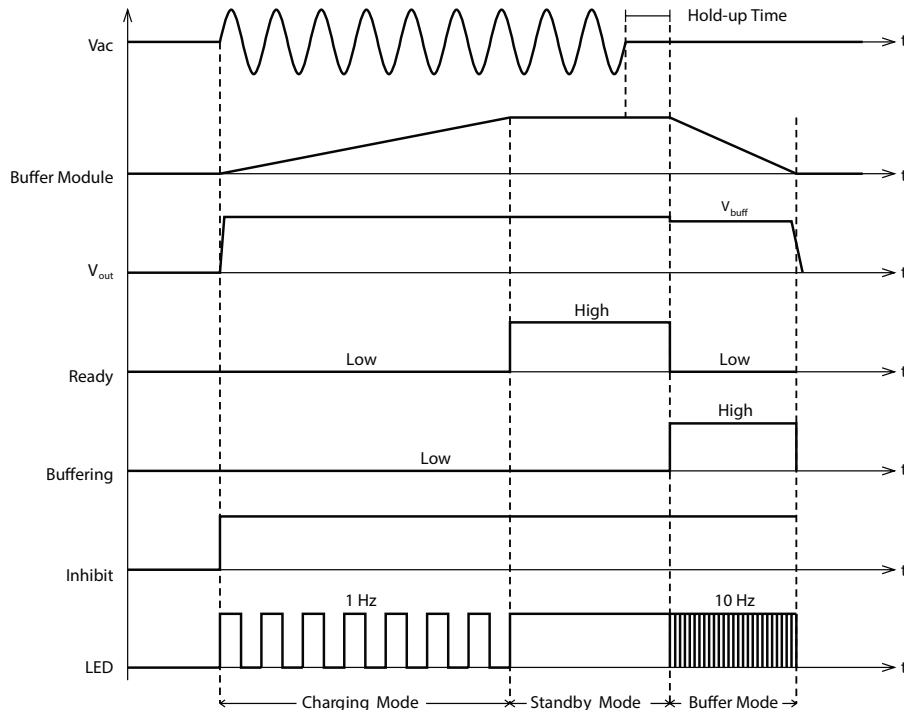


RHINO PSB Power Supply Accessories

Buffer Module Wiring


General connection / wiring diagram

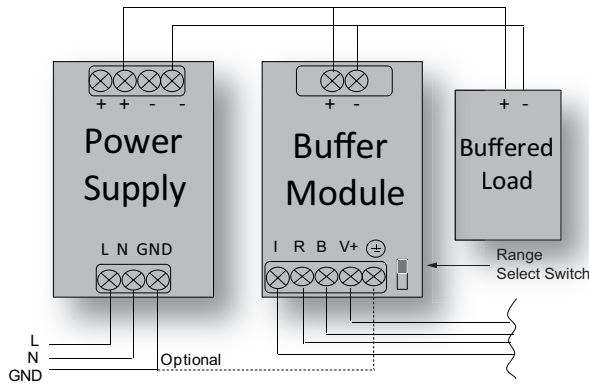

General signals wiring

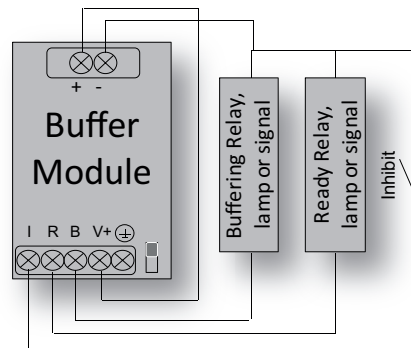

Paralleling of buffer units

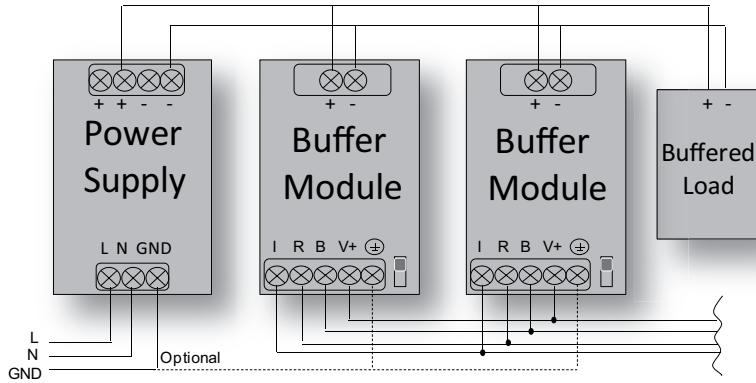

Decoupling of buffered branches

