




Synchronous Drive Components

Taper-Lock®* Style Bushings

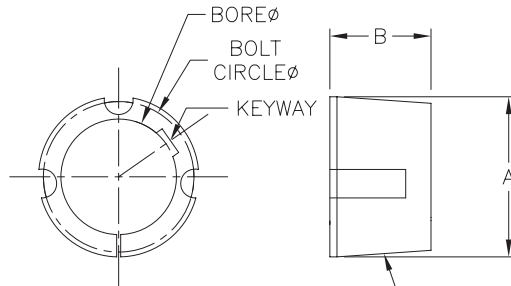

TAPER 0.75 INCHES PER 12 INCHES ON DIAMETER

Taper-Lock® Bushings													
Part Number	Price	Weight (lb)	Series	Torque Capacity (lb-in)	Bore Size (in)		Keyway (in)	Nominal Dimensions (in)			Mounting Screws		Material*
					Nominal	Max. with Shallow Keyseat		A	B	D (Bolt Circle)	#	Size	
TL-1108-0500	\$10.50	0.4	1108	1300	0.500		1/8	1.511	0.875	1.453	2	1/4 x 1/2	S
TL-1108-0625	\$10.50	0.3	1108	1300	0.625		3/16	1.511	0.875	1.453	2	1/4 x 1/2	S
TL-1108-0750	\$10.50	0.3	1108	1300	0.750		3/16	1.511	0.875	1.453	2	1/4 x 1/2	S
TL-1108-0875	\$10.50	0.3	1108	1300	0.875		3/16	1.511	0.875	1.453	2	1/4 x 1/2	S
TL-1108-1000	\$10.50	0.2	1108	1300	1.00		1/4	1.511	0.875	1.453	2	1/4 x 1/2	S
TL-1210-0625	\$11.00	0.6	1210	3600	0.625		3/16	1.875	1.0	1.750	2	3/8 x 5/8	S
TL-1210-0750	\$11.00	0.5	1210	3600	0.750		3/16	1.875	1.0	1.750	2	3/8 x 5/8	S
TL-1210-0875	\$11.00	0.6	1210	3600	0.875		3/16	1.875	1.0	1.750	2	3/8 x 5/8	S
TL-1210-1000	\$11.00	0.4	1210	3600	1.000	1.25	1/4	1.875	1.0	1.750	2	3/8 x 5/8	S
TL-1210-1125	\$11.00	0.4	1210	3600	1.125		1/4	1.875	1.0	1.750	2	3/8 x 5/8	S
TL-1610-0625	\$12.50	0.9	1610	4300	0.625		3/16	2.250	1.0	2.125	2	3/8 x 5/8	S
TL-1610-0750	\$12.50	0.9	1610	4300	0.750		3/16	2.250	1.0	2.125	2	3/8 x 5/8	S
TL-1610-0875	\$12.50	0.9	1610	4300	0.875		3/16	2.250	1.0	2.125	2	3/8 x 5/8	S
TL-1610-1000	\$12.50	0.8	1610	4300	1.000		1/4	2.250	1.0	2.125	2	3/8 x 5/8	S
TL-1610-1125	\$12.50	0.8	1610	4300	1.125		1/4	2.250	1.0	2.125	2	3/8 x 5/8	S
TL-1610-1250	\$12.50	0.7	1610	4300	1.250		1/4	2.250	1.0	2.125	2	3/8 x 5/8	S
TL-1610-1375	\$12.50	0.6	1610	4300	1.375		5/16	2.250	1.0	2.125	2	3/8 x 5/8	S
TL-2012-0750	\$17.50	1.8	2012	7150	0.750		3/16	2.750	1.250	2.625	2	7/16 x 7/8	S
TL-2012-0875	\$17.50	1.7	2012	7150	0.875		3/16	2.750	1.250	2.625	2	7/16 x 7/8	S
TL-2012-1000	\$17.50	1.6	2012	7150	1.000	2	1/4	2.750	1.250	2.625	2	7/16 x 7/8	S
TL-2012-1125	\$17.50	1.5	2012	7150	1.125		1/4	2.750	1.250	2.625	2	7/16 x 7/8	S
TL-2012-1250	\$17.50	1.5	2012	7150	1.250		1/4	2.750	1.250	2.625	2	7/16 x 7/8	S
TL-2012-1375	\$17.50	1.4	2012	7150	1.375		5/16	2.750	1.250	2.625	2	7/16 x 7/8	S
TL-2517-0875	\$29.00	3.8	2517	11600	0.875		3/16	3.375	1.750	3.250	2	1/2 x 1	S
TL-2517-1000	\$29.00	3.7	2517	11600	1.000		1/4	3.375	1.750	3.250	2	1/2 x 1	S
TL-2517-1125	\$29.00	3.5	2517	11600	1.125	2.5	1/4	3.375	1.750	3.250	2	1/2 x 1	S
TL-2517-1250	\$29.00	3.4	2517	11600	1.250		1/4	3.375	1.750	3.250	2	1/2 x 1	S
TL-2517-1375	\$29.00	3.3	2517	11600	1.375		5/16	3.375	1.750	3.250	2	1/2 x 1	S

*Taper-Lock® is a registered trademark of Reliance Electric.

* S = Steel

Note: Stock bore sizes shown. Bushings may be re-bored up the maximum size listed. Maximum bores may require a shallow keyway and rectangular key



Synchronous Drive Components

Product Overview



Timing Pulleys



Bushings




Timing Belts

Timing pulleys, bushings, and belts allow you to change speed and torque while connecting mechanically rotating components.

- Select pulley sizes in order to accomplish the speed or torque change that you need.
- Bushings allow you to connect the same pulleys to different sized shafts, or vice versa.
- Synchronous drive belts and pulleys utilize teeth to prevent slippage and unwanted speed variations.

Note: For pulley speeds in excess of 6,000 RPM, pulleys should be dynamically balanced.

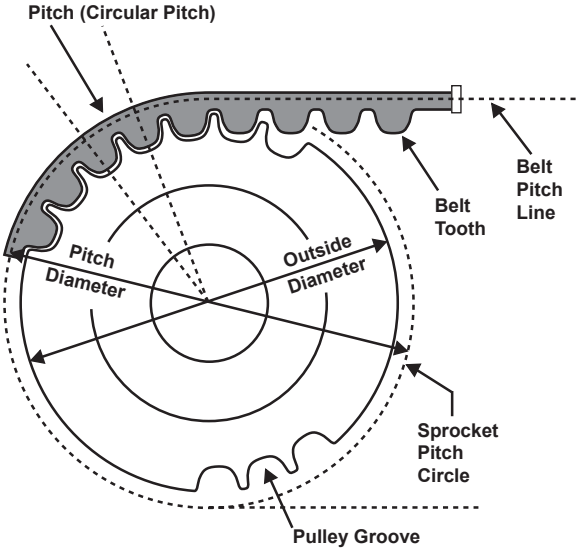

Drive Component Selection

1. Determine required torque (ft·lbs) and rpm of driven shaft.
2. Determine design horsepower:

$$DHP = \frac{T \cdot N \cdot sf}{5,252}$$
 Where: T = torque (ft·lb)
 N = rpm
 sf = service factor per table

Service Factors			
Machine Type	<8hr per day	8-16 hr per day	Continuous
Smooth Running	1.0	1.2	1.4
Light Shock Loads	1.3	1.5	1.7
Heavy Shock Loads	1.7	1.9	2.1


3. Determine Pitch (MXL XL or L) and belt width required by reading Design Horsepower Chart.
4. Select driver and driven pulleys to match desired speed or torque change.
5. Determine belt length per belt length calculation.

Note: AutomationDirect provides an online configuration tool to assist with pulley and belt sizing.
 See: www.automationdirect.com/selectors/beltandpulley




Synchronous Drive Components

Design Horsepower Chart

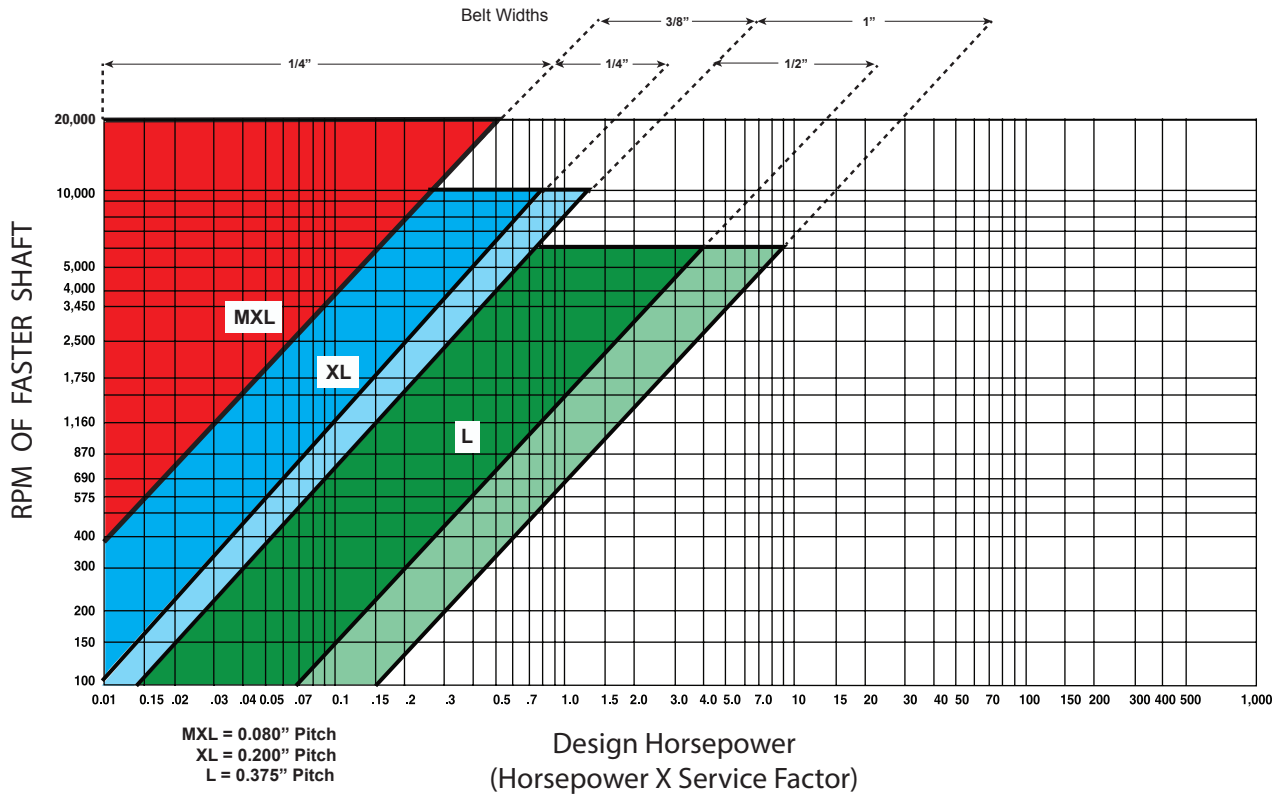

Drive Component Selection Continued

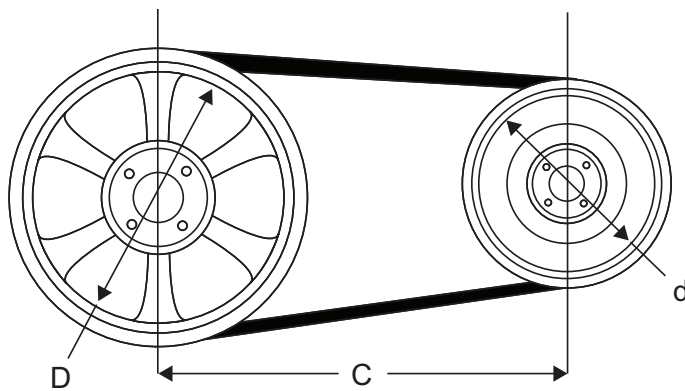

Belt Length Calculations

$$L = 2C + 1.57(D + d) + \frac{(D-d)^2}{4C}$$

Where:

- L = Length of belt at pitch line (in inches)
- C = Center distance (in inches)
- D = Pitch diameter (in inches) of large sprocket
- d = Pitch diameter (in inches) of small sprocket