

Through-beam sensor - Emitter
LLR-C23PA-NMK-400


PROUDLY
MADE IN USA

For use in NFPA 79 Applications only IO-Link

Sensing range
typ. max. **0...30000 mm**

Housing **20 x 30 (C23)**

Operation range **0...25000 mm**

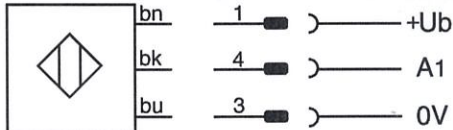

U_b 10...30 VDC
 $I_A \leq 100$ mA

A1: IO-Link

For use in class 2 circuits




CONTRINEX USA
480 Wrangler Dr 100, Coppell TX 75019 US
Internet: www.contrinex.com



Made by Contrinex USA

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.



Through-beam sensor - Emitter
LLR-C23PA-NMK-400


PROUDLY
MADE IN USA

For use in NFPA 79 Applications only IO-Link

Sensing range
typ. max. **0...30000 mm**

Housing **20 x 30 (C23)**

Operation range **0...25000 mm**

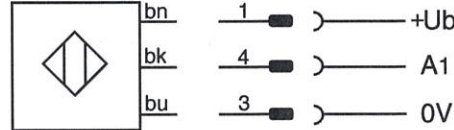

U_b 10...30 VDC
 $I_A \leq 100$ mA

A1: IO-Link

For use in class 2 circuits




CONTRINEX USA
480 Wrangler Dr 100, Coppell TX 75019 US
Internet: www.contrinex.com



Made by Contrinex USA

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines.



Through-beam sensor - Emitter
LLR-C23PA-NMK-400


PROUDLY
MADE IN USA

For use in NFPA 79 Applications only IO-Link

Sensing range
typ. max. **0...30000 mm**

Housing **20 x 30 (C23)**

Operation range **0...25000 mm**

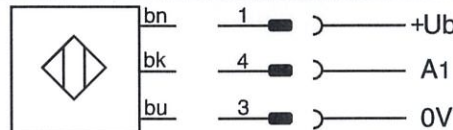


U_b 10...30 VDC
 $I_A \leq 100$ mA

A1: IO-Link

For use in class 2 circuits



CONTRINEX USA
480 Wrangler Dr 100, Coppell TX 75019 US
Internet: www.contrinex.com



Through-beam sensor - Emitter
LLR-C23PA-NMK-400


PROUDLY
MADE IN USA

For use in NFPA 79 Applications only IO-Link

Sensing range
typ. max. **0...30000 mm**

Housing **20 x 30 (C23)**

Operation range **0...25000 mm**

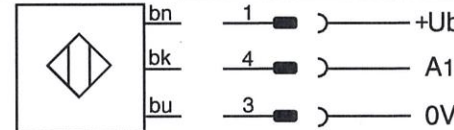

U_b 10...30 VDC
 $I_A \leq 100$ mA

A1: IO-Link

For use in class 2 circuits



CONTRINEX USA
480 Wrangler Dr 100, Coppell TX 75019 US
Internet: www.contrinex.com