


Q4140-1 Cut Sheet



Quabbin control and signal cable, unshielded, 2 conductors, 18 AWG, 7-stranded, tinned copper, PVC conductor insulation material, PVC jacket, gray, cut to length.

For complete product information, please see this item on our store at the following link:

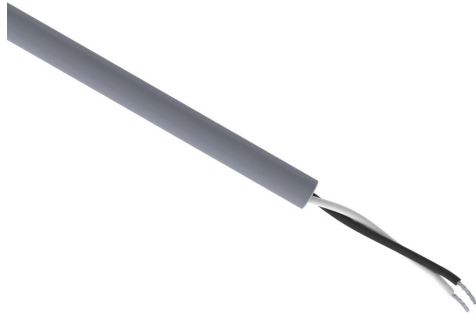

<https://www.automationdirect.com/pn/Q4140-1>

Technical Specifications

| | |
|--------------------------------------|--------------------|
| Brand | Quabbin |
| Item | Cable |
| Wire/Cable Type | Control and signal |
| UL Wire/Cable Type | CM and AWM |
| Applicable Standards | UL 2095 |
| Application | General purpose |
| Flexibility | Semi-flexible |
| Voltage Rating | 300V |
| Conductors | 2 conductors |
| Conductor Size | 18 AWG |
| Conductor Stranding | 7-stranded |
| Conductor Material | Tinned copper |
| Conductor Insulation Material | PVC |

| | |
|---------------------------------------|--|
| Conductor Insulation Color | Black and white |
| Shielding | Unshielded |
| Jacket Material | PVC |
| Jacket Color | Gray |
| Nominal Overall Cable Diameter | 0.21in |
| Bulk Length | Cut to length |
| Package Type | <ul style="list-style-type: none">• 20 to 99ft = Coil• 100 to 885ft = 14 x 7in Reel• 886 to 1265ft = 14 x 10in Reel• 1266 to 1935ft = 16 x 10in Reel• 1936 to 2705ft = 18 x 10in Reel• 2706 to 3520ft = 18 x 13in Reel• 3521 to 5000ft = 24 x 17in Wooden Reel |

Agency Approvals

| | |
|-------------------------|---|
| UL Listed File # | E118830, E69976 |
| CSA File # | LL51726 |
| RoHS Status | Meets RoHS Chemical Restrictions - No CE (See RoHS Statement Below) |
| EU REACH | View EU REACH document |
| Other | RoHS Statement |